



**SPC BENCHMARK 1™
EXECUTIVE SUMMARY**

**HUAWEI SYMANTEC TECHNOLOGIES CO., LTD.
HUAWEI SYMANTEC OCEANSPACE™ DORADO2100**

SPC-1 V1.12

Submitted for Review: December 29, 2011

Submission Identifier: A00112

Revised: January 12, 2012

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Huawei Symantec Technologies Co., Ltd. – http://www.huaweisymantec.com/en/ Eric He – eriche@huaweisymantec.com Tianchen Road 88# Chengdu, Sichuan, P.R. China 611711 Phone: 0086 28 62905593 FAX: 0086 28 62905793
Test Sponsor Alternate Contact	Huawei Symantec Technologies Co., Ltd. – http://www.huaweisymantec.com/en/ Jarvis Wang – wangyaohui@huaweisymantec.com Tianchen Road 88# Chengdu, Sichuan, P.R.China 611711 Phone: 86 28 62905639 FAX: 86 28 62905793
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.12
SPC-1 Workload Generator revision number	V2.2.0
Date Results were first used publicly	December 29, 2011
Date the FDR was submitted to the SPC	December 29, 2011
Date revised FDR was submitted to the SPC Corrected Total Price in Audit Certification (<i>FDR, page vii</i>)	January 12, 2012
Date the Priced Storage Configuration is available for shipment to customers	currently available
Date the TSC completed audit certification	December 28, 2011

Tested Storage Product (TSP) Description

Huawei Symantec Oceanspace Dorado2100 (Dorado2100) is an FC-SAN solid state storage product designed for the enterprise-level high-performance storage market. Dorado2100 is designed with an SSD storage system architecture, advanced cache management and I/O scheduling algorithm to present stunning performance. It fits into scenarios such as large database query/retrieval, high-performance computing, and video editing.

Summary of Results

SPC-1 Reported Data	
Tested Storage Product (TSP) Name: Huawei Symantec Oceanspace™ Dorado2100	
Metric	Reported Result
SPC-1 IOPS™	100,051.99
SPC-1 Price-Performance	\$0.90/SPC-1 IOPS™
Total ASU Capacity	1,104.947 GB
Data Protection Level	Protected (<i>Mirroring</i>)
Total TSC Price (including three-year maintenance)	\$90,320.79


SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-1 benchmark.

A Data Protection Level of Protected (*Mirroring*) configures two or more identical copies of user data.

Storage Capacities, Relationships, and Utilization

The following diagram and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

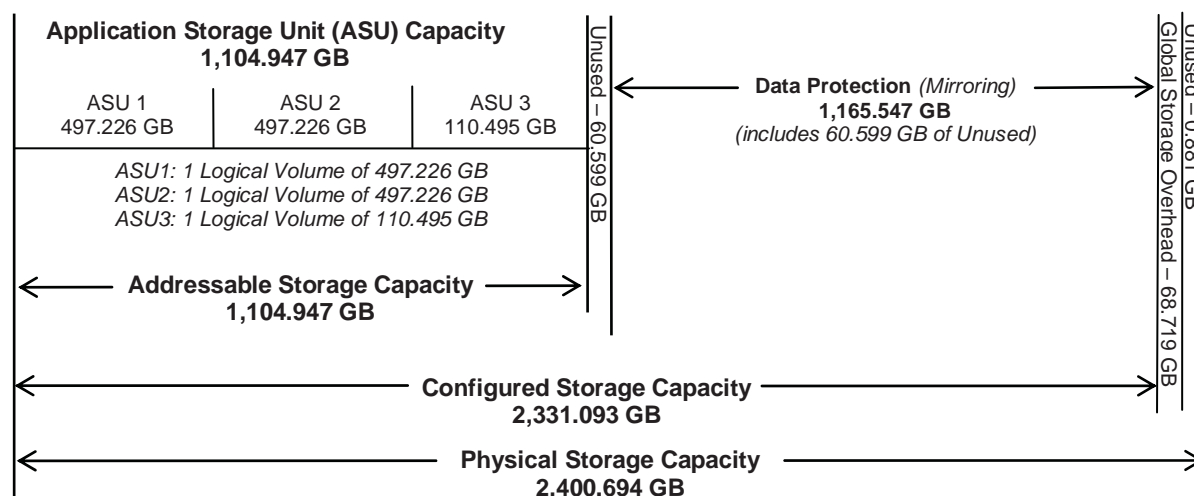

SPC-1 Storage Capacity Utilization	
Application Utilization	46.03%
Protected Application Utilization	92.05%
Unused Storage Ratio	5.09%

Application Utilization: Total ASU Capacity (1,104.947 GB) divided by Physical Storage Capacity (2,400.694 GB)

Protected Application Utilization: Total ASU Capacity (1,104.947 GB) plus total Data Protection Capacity (1,165.547 GB) minus unused Data Protection Capacity (60.599 GB) divided by Physical Storage Capacity (2,400.694 GB)


Unused Storage Ratio: Total Unused Capacity (122.079 GB) divided by Physical Storage Capacity (2,400.694 GB) and may not exceed 45%.

Detailed information for the various storage capacities and utilizations is available on pages 19-20 in the Full Disclosure Report.

Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at the any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

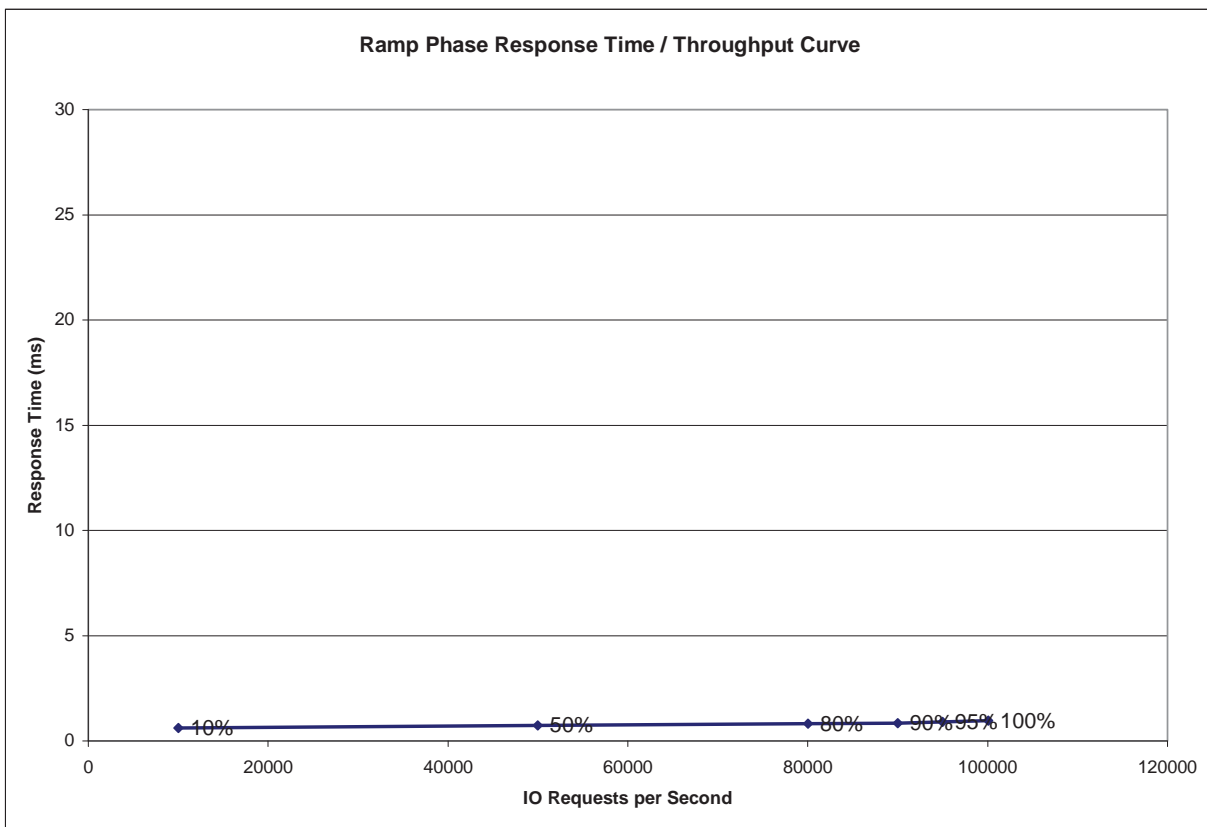

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	9,995.00	49,988.27	80,024.46	89,996.36	94,984.18	100,051.99
Average Response Time (ms):						
All ASUs	0.61	0.74	0.81	0.85	0.90	0.95
ASU-1	0.56	0.62	0.70	0.74	0.77	0.79
ASU-2	0.75	0.76	0.85	0.89	0.93	0.95
ASU-3	0.64	1.00	1.02	1.05	1.16	1.30
Reads	0.64	0.66	0.79	0.85	0.89	0.92
Writes	0.58	0.80	0.82	0.85	0.91	0.97

Priced Storage Configuration Pricing

Part #	Description	Quantity	Unit Price (USD)	Total Price(USD)
SDO21SLC24T	Dorado2100 High Performance Solid State Storage System-2.4TB(SPE31C0224,AC,24*100GB SLC SSD,8*8G FC Port,Maximum Supporting 16*8G FC Port,with HS HSSD Controller System Software)	1	52028.66	52028.66
14130321	Patch Cord,DLC/PC-DLC/PC,Multimode,2mm Parallel,3m	8	11.00	88.00
SDO21MP	Dorado2100 Multi-path Software	1	0.00	0.00
SDO21ISM	HS Integrated Storage Manager-Device Management License for Dorado2100(V100R003) (ESSENTIAL)	1	7432.56	7432.56
SDO21SSLCPAE	Oceanspace HS Storage Array Control System Software-Include PAE License Certificate (ESSENTIAL)	1	14865.12	14865.12
QLE2562-CK	QLogic Dual Port 8Gb Fibre Channel to PCI Express Host Bus	4	1050.00	4200.00
			Total	78614.34
Warranty Uplift Option(3 Years)	Maintenance Service	Quantity		
TSGSDO21SLC24T	Upgrade from Standard to Gold service package in warranty period (3 years). Gold service package include:7*24 Remote Support. Access to all new software updates. 4 Business Hours Parts Delivery. 4 Business Hours Engineer Onsite.	1	11706.45	11706.45
			Total	90,320.79

The above pricing includes hardware maintenance and software support for three years, 7 days per week, 24 hours per day. The hardware maintenance and software support provides the following:

- Acknowledgement of new and existing problems with four (4) hours.
- Onsite presence of a qualified maintenance engineer or provision of a customer replaceable part within four (4) hours of the above acknowledgement for any hardware failure that results in an inoperative Priced Storage Configuration that can be remedied by the repair or replacement of a Priced Storage Configuration component.


Huawei Symantec USA Inc. only sells its products to third-party resellers, who in turn, sell those products to U.S. customers. The above pricing, which also includes the required three-year maintenance and support, was obtained from one of those third-party resellers. See page 66 (*Appendix F: Third-Party Quotation*) of the associated SPC-1 Full Disclosure Report for a copy of the third-party reseller quotation.

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and Priced Storage Configuration.

Priced Storage Configuration Diagram

4 - Qlogic dual-ported QLE 2562 FC HBAs
8 Fibre Channel Connections

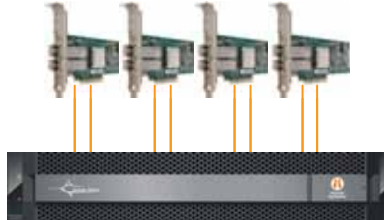

Huawei Symantec Oceanspace™ Dorado2100

2 - Active-Active controllers
16 GB per controller (32 GB total)
4 - FC 4-port Adapters (8 Gbps)
8 – 8 Gbps SFPs

24 – 100 GB Solid State Devices (SSDs)

Priced Storage Configuration Components

Priced Storage Configuration:
UltraPath for Windows, version 5.2.3790.3959
4 – Qlogic dual-ported QLE2562 FC HBAs
Huawei Symantec Oceanspace™ Dorado2100 2 – Active-Active controllers 16 GB cache per controller <i>(32 total)</i> 4 – FC 4-port 8 Gbps adapters 8 – 8 Gbps SFPs 8 – front-end connections <i>(total and used)</i>
24 – 100 GB Solid State Devices (SSDs)