



THE POSSIBILITIES ARE INFINITE

SPC BENCHMARK 1™ EXECUTIVE SUMMARY

**FUJITSU LIMITED
FUJITSU STORAGE SYSTEMS
ETERNUS3000 MODEL 100**

SPC-1 V1.8

Submitted for Review: June 22, 2004

Submission Identifier: A00031

Revised: July 9, 2004

Accepted: August 21, 2004



EXECUTIVE SUMMARY**Test Sponsor and Contact Information**

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Fujitsu Limited – http://www.fujitsu.com/services/computing/storage/ Fujitsu Computer Systems Corp. C.A. (Sandy) Wilson Sandy.Wilson@us.fujitsu.com 1250 East Arques Ave PO Box 3470 Sunnyvale, CA 94088-3470 Phone: (916) 434-8593
Test Sponsor Alternate Contact	Fujitsu Limited – http://www.fujitsu.com/services/computing/storage/ Fujitsu Computer Systems Corp. John Andoh John.Andoh@us.fujitsu.com Phone: (408) 746-6432 FAX: (408) 942-1725 Jim Repinski Jim.Repinski@us.fujitsu.com Phone: (408)992-2597 Noah Jergler Noah.Jergler@us.fujitsu.com Phone: (408)746-7690 Kun Katsumata Kun.Katsumata@us.fujitsu.com Phone (408) 746-6415 1250 East Arques Ave. PO Box 3470 Sunnyvale, CA 94088-3470
Test Sponsor Alternate Contact	Fujitsu Limited – http://www.fujitsu.com/services/computing/storage/ Norihiko Kondo kondo.n@jp.fujitsu.com Kanagawa-ken, Kanagawa-ken, Kawasaki-shi, Nakahara-ku, Kamikodanaka 4-1-1 Japan 211-8588 Phone: 044- 754-3605
Auditor	Storage Performance Council – www.storageperformance.org Walter E. Baker AuditService@storageperformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.8
SPC-1 Workload Generator revision number	V2.00.04a
Date Results were first used publicly	June 22, 2004
Date FDR was submitted to the SPC	June 22, 2004
Date revised FDR was submitted to the SPC Revised pricing-three year maintenance	July 9, 2004
Date the TSC is/was available for shipment to customers	July 10, 2003
Date the TSC completed audit certification	June 4, 2004

Summary of Results

SPC-1 Results	
Tested Storage Configuration (TSC) Name: Fujitsu Storage Systems ETERNUS3000 Model 100	
Metric	Reported Result
SPC-1 IOPS™	11,201.47
SPC-1 Price-Performance	\$9.69/SPC-1 IOPS™
Total ASU Capacity	560.874 GB
Data Protection Level	Mirroring
Total TSC Price (including three-year maintenance)	\$108,498

SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-1 benchmark.

A **Data Protection Level** of Mirroring configures two or more identical copies of user data.

Storage Capacities and Relationships


The following diagram documents the various storage capacities, used in this benchmark, and their relationships.

Physical Capacity (GB)						
2,183.764						
Configured Capacity (GB)						Global Ovhd
1,126.705						
Addressable Capacity (GB)			Unused	Addressable (Mirror, GB)		Metadata & Hot Spares
561.447				561.447		
ASU Capacity (GB)			0.547	ASU (Mirror, GB)		3.811
560.900				560.900		
ASU1	ASU2	ASU3		Unused		
252.400	252.400	56.100		0.547		
2 LVs @	2 LVs @	1 LVs @				
126.200 /LV	126.200 /LV	56.100 /LV				
1,018.094 Unused						

Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at the 100% load point cannot exceed 30 milliseconds or the benchmark measurement is invalid.

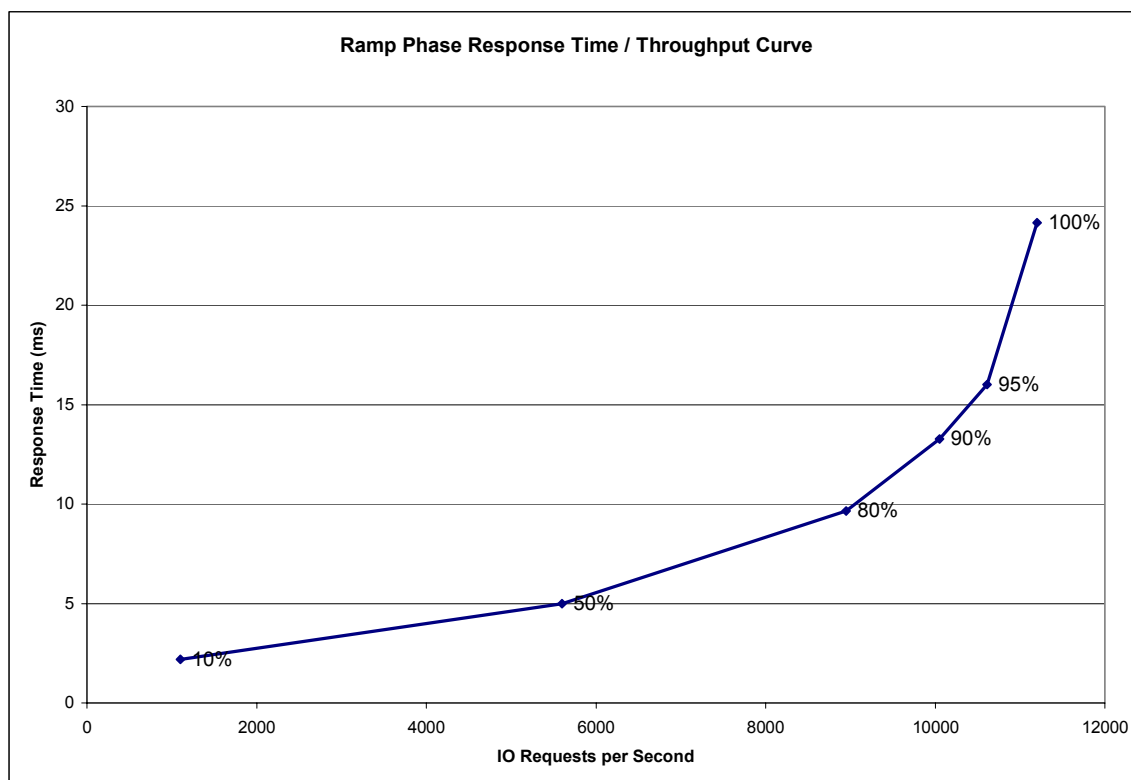

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	1,101.00	5,601.60	8,948.95	10,052.17	10,608.65	11,201.47
Average Response Time (ms):						
All ASUs	2.20	5.00	9.65	13.26	16.01	24.15
ASU-1	2.73	6.26	11.82	15.98	19.09	28.63
ASU-2	2.75	6.96	16.92	25.78	32.85	49.00
ASU-3	0.83	1.45	1.87	2.02	2.10	3.76
Reads	4.45	10.67	21.85	30.67	37.47	55.27
Writes	0.73	1.29	1.71	1.91	2.03	3.87


Tested Storage Configuration Pricing (*Priced Storage Configuration*)

Item	Product Id	Description	Qty	Unit \$	Extd \$
1	E310R24BU	ETERNUS3000 Model 100 - 4 ports (rack mount - 4U) including Controller Enclosure, 2x Controllers, each Controller with 2 ports & 1GB Cache dual power supplies, dual battery units 4x FC cables (5m), 2x LAN cables (5m) rack mount kit, ETERNUSmgr & drivers slots for up to 15 disk drives	1	\$20,600	\$20,600
2	E310RE2U	Additional Drive Enclosure - (rack mount - 3U) with slots for up to 15 disk drives	1	\$7,200	\$7,200
3	E310CD7H	73GB/15krpm Disk Drives (set of 5)	6	\$14,475	\$86,850
4	PW028FC3U	Emulex LP9802	2	\$2,590	\$5,180
5	FPC58-1213-01	Enhanced Plus Model 100 - Phone 24x7, On-site 24x7, with 4 hour response - 2 year Warranty Uplift	1	\$7,380	\$7,380
6	FPC58-1217-01	Enhanced Plus Model 100 - Phone 24x7, On-site 24x7, with 4 hour response - 1 year Post Warranty	1		
Total Product List Price					\$119,830
				Product Discount	15%
Net Product Price					\$101,856
Total Service List Price					\$7,380
				Service Discount	10%
Net Service Price					\$6,642
Total Sell Price, including 3 years Service					\$108,498

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the Tested Storage Configuration (TSC) and the Priced Storage Configuration.

Benchmark Configuration/Tested Storage Configuration Diagram

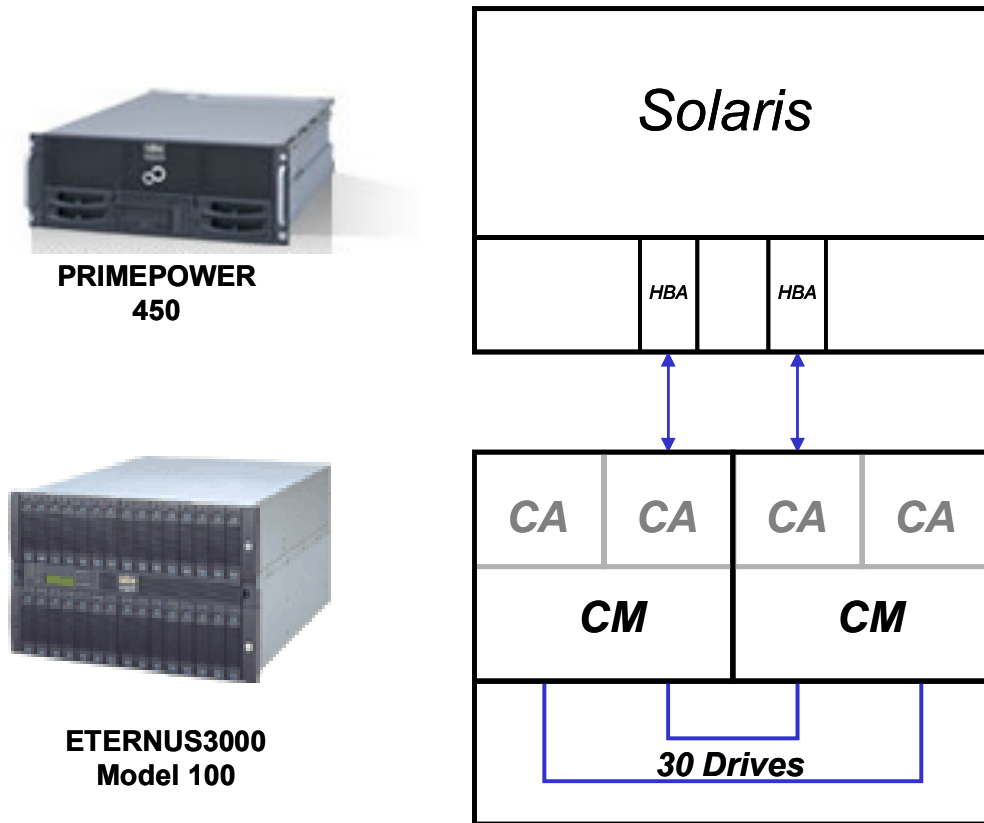

Host Systems:	Tested Storage Configuration (TSC):
UID=HS-1	2 – Emulex LP8902 FC HBAs (2 Gbit)
Fujitsu PRIMEPOWER 450R (Rack Mount)	UID=SC-1:
2 - SPARC64 V (1.1 GHz) CPUs 128 KB L1 data cache 1 MB L2 cache	Fujitsu ETERNUS3000 Model 100 2 – Controller Modules (CM), each with 1.26 GHz CPU 1 GB cache
16 GB main memory	
Solaris 9	4 – Front side fibre channels (CA) – 2 Gbit each (2 used, 2 unused)
PCI	2 – Drive side fibre channel loops – 2 Gbit each
WG	30 – 73 GB 15K RPM disk drives
	2 – Drive enclosure modules, each with dual FC-AL interfaces 15 – hot swap drive slots