



SPC BENCHMARK 1™
FULL DISCLOSURE REPORT

SUN MICROSYSTEMS, INC.
SUN STOREDGE™ 6920 (8 TRAY)

SPC-1 V1.8

Submitted for Review: September 20, 2004
Submission Identifier: A00034
Accepted: November 19, 2004



First Edition – August 2004

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by Sun Microsystems, Inc. for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. Sun Microsystems, Inc. may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local Sun Microsystems, Inc. representative for information on products and services available in your area.

© Copyright Sun Microsystems, Inc. 2004. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

SPC Benchmark 1, SPC-1 IOPS, and SPC-1 LRT are trademarks of the Storage Performance Council. Sun, Sun Microsystems, the Sun logo, Sun StorEdge, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. UNIX is a registered trademark of The Open Group in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

Notes

The following terms, used in this document, are defined as:

- Kilobyte (KB) is equal to 1,000 (10^3) bytes.
- Megabyte (MB) is equal to 1,000,000 (10^6) bytes.
- Gigabyte (GB) is equal to 1,000,000,000 (10^9) bytes.
- Terabyte (TB) is equal to 1,000,000,000,000 (10^{12}) bytes.

Table of Contents

Audit Certification	vi
Letter of Good Faith	viii
Executive Summary	9
Test Sponsor and Contact Information	9
Revision Information and Key Dates	9
Summary of Results	10
Storage Capacities and Relationships	10
Response Time – Throughput Curve	11
Response Time – Throughput Data	11
Tested Storage Configuration Pricing (<i>Priced Storage Configuration</i>)	12
Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration	12
Benchmark Configuration/Tested Storage Configuration Diagram	13
Configuration Information	14
Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram	14
Storage Network Configuration	14
Host System Configuration	14
Customer Tunable Parameters and Options	15
Tested Storage Configuration (TSC) Description	15
SPC-1 Workload Generator Storage Configuration	15
Data Repository	16
Definitions	16
Storage Capacities and Relationships	17
SPC-1 Storage Capacities	17
SPC-1 Storage Hierarchy Ratios	17
SPC-1 Storage Capacities and Relationships Illustration	18
Logical Volume Capacity and ASU Mapping	18
SPC-1 Benchmark Execution Results	19
Definitions	19
Primary Metrics Test – Sustainability Test Phase	20
SPC-1 Workload Generator Input Parameters	20
Sustainability Test Results File	20
Sustainability – Data Rate Distribution Data (<i>MB/second</i>).....	21
Sustainability – Data Rate Distribution Graph	22
Sustainability – I/O Request Throughput Distribution Data	23
Sustainability – I/O Request Throughput Distribution Graph	24

Sustainability – Measured Intensity Multiplier and Coefficient of Variation.....	24
Primary Metrics Test – IOPS Test Phase.....	25
SPC-1 Workload Generator Input Parameters	25
IOPS Test Results File.....	25
IOPS Test Run – I/O Request Throughput Distribution Data	26
IOPS Test Run – I/O Request Throughput Distribution Graph.....	26
IOPS Test Run – Response Time Frequency Distribution Data	27
IOPS Test Run –Response Time Frequency Distribution Graph.....	27
IOPS Test Run – Average Response Time (ms) Distribution Data	28
IOPS Test Run – Average Response Time (ms) Distribution Graph	28
IOPS Test Run – I/O Request Information.....	29
IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation	29
Primary Metrics Test – Response Time Ramp Test Phase	30
SPC-1 Workload Generator Input Parameters	30
Response Time Ramp Test Results File.....	30
Response Time Ramp Distribution (IOPS) Data.....	31
Response Time Ramp Distribution (IOPS) Graph	31
Response Time Ramp Distribution (IOPS) Graph	32
SPC-1 LRT™ Average Response Time (ms) Distribution Data.....	33
SPC-1 LRT™ Average Response Time (ms) Distribution Graph	33
SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation	34
Repeatability Test	35
SPC-1 Workload Generator Input Parameters	35
Repeatability Test Results File	36
Repeatability 1 LRT – I/O Request Throughput Distribution Data.....	37
Repeatability 1 LRT – I/O Request Throughput Distribution Graph	37
Repeatability 1 LRT –Average Response Time (ms) Distribution Data	38
Repeatability 1 LRT –Average Response Time (ms) Distribution Graph.....	38
Repeatability 1 IOPS – I/O Request Throughput Distribution Data	39
Repeatability 1 IOPS – I/O Request Throughput Distribution Graph.....	39
Repeatability 1 IOPS –Average Response Time (ms) Distribution Data	40
Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph	40
Repeatability 2 LRT – I/O Request Throughput Distribution Data.....	41
Repeatability 2 LRT – I/O Request Throughput Distribution Graph	41
Repeatability 2 LRT –Average Response Time (ms) Distribution Data	42
Repeatability 2 LRT –Average Response Time (ms) Distribution Graph.....	42
Repeatability 2 IOPS – I/O Request Throughput Distribution Data	43
Repeatability 2 IOPS – I/O Request Throughput Distribution Graph.....	43
Repeatability 2 IOPS –Average Response Time (ms) Distribution Data	44

Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph	44
Repeatability 1 (LRT) Measured Intensity Multiplier and Coefficient of Variation	45
Repeatability 1 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	45
Repeatability 2 (LRT) Measured Intensity Multiplier and Coefficient of Variation	45
Repeatability 2 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	45
Data Persistence Test.....	46
SPC-1 Workload Generator Input Parameters	46
Data Persistence Test Results File	46
Data Persistence Test Results.....	47
Priced Storage Configuration Availability Date.....	48
Pricing Information.....	48
Anomalies or Irregularities	48
Appendix A: Customer Tunable Parameters and Options.....	49
Appendix B: Tested Storage Configuration (TSC) Creation	52
Access the storage interface	52
Create a Secure Virtual Storage Domain (SVSD).....	52
Create virtual pools and Vdisks using the MailSpooling profile.....	52
Create virtual volumes from the pools.....	52
Map the volumes to the initiators (Host System HBAs).....	52
Appendix C: SPC-1 Workload Generator Storage Commands and Parameters	61
Appendix D: SPC-1 Workload Generator Input Parameters.....	62

AUDIT CERTIFICATION



Leah Schoeb
Sun Microsystems, Inc.
5300 Riata Park Court AUS08
Austin, TX 78721

August 27, 2004

The SPC Benchmark 1™ results listed below for the Sun StorEdge™ 6920 (8 tray) were produced in compliance with the SPC Benchmark 1™ V1.8 Onsite Audit requirements.

SPC Benchmark 1™ V1.8 Results	
Tested Storage Configuration (TSC) Name:	
Sun StorEdge™ 6920 (8 tray)	
Metric	Reported Result
SPC-1 IOPS™	19,496.00
SPC-1 Price-Performance	\$12.10/SPC-1 IOPS™
Total ASU Capacity	1,222,000 GB
Data Protection Level	Mirroring
Total TSC Price (including three-year maintenance)	\$235,875

The following SPC Benchmark 1™ Onsite Audit requirements were reviewed and found compliant with V1.8 of the SPC Benchmark 1™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified by physical inspection and information supplied by Sun Microsystems, Inc.:
 - ✓ Physical Storage Capacity and requirements.
 - ✓ Configured Storage Capacity and requirements.
 - ✓ Addressable Storage Capacity and requirements.
 - ✓ Capacity of each Logical Volume and requirements.
 - ✓ Capacity of each Application Storage Unit (ASU) and requirements.
- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).
- Physical verification of the components to match the above diagram.


Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

- Listings and commands to configure the Benchmark Configuration/Tested Storage Configuration, including customer tunable parameters.
- Commands and parameters used to configure the SPC-1 Workload Generator.
- The following Host System requirements were verified by physical inspection and information supplied by Sun Microsystems, Inc.:
 - ✓ The type of Host System including the number of processors and main memory.
 - ✓ The presence and version number of the Workload Generator on the Host System.
 - ✓ The TSC boundary within the Host System.
- The execution of Test, Test Phase, and Test Run was observed and found compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1 Benchmark Specification.
- The Test Results Files and resultant Summary Results Files received for each of following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1 Benchmark Specification:
 - ✓ Data Persistence Test
 - ✓ Sustainability Test Phase
 - ✓ IOPS Test Phase
 - ✓ Response Time Ramp Test Phase
 - ✓ Repeatability Test
- There were no differences between the Tested Storage Configuration (TSC) used for the benchmark and Priced Storage Configuration.
- The final version of the pricing spreadsheet met all of the requirements and constraints of Clause 8 of the SPC-1 Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 9 of the SPC-1 Benchmark Specification.

Audit Notes:

There were no additional audit notes or exceptions.

Respectfully,



Walter E. Baker
SPC Auditor

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

LETTER OF GOOD FAITH

Date: 7/26/03

From: Kathleen Holmgren

To: Walter Baker

Subject: SPC-1 Letter of Good Faith for the StorEdge™ 6920

Sun Microsystems Inc. is the SPC-1 Test Sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1 benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with V1.8 of the SPC-1 benchmark specification.

In addition, we have reported any items in the Benchmark Configuration and execution of the benchmark that affected the reported results even if the items are not explicitly required to be disclosed by the SPC-1 benchmark specification.

Signed:

A handwritten signature in cursive script, appearing to read "Kathleen Holmgren", written over a horizontal line.

Kathleen Holmgren
Senior Vice President, Product Line Management Network Storage

EXECUTIVE SUMMARY**Test Sponsor and Contact Information**

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Sun Microsystems, Inc. – http://www.sun.com Leah Schoeb – leah.schoeb@sun.com 5300 Riata Park Court AUS08 Austin, TX 78721 Phone: (512) 401-1227 FAX: (512) 266-2523
Test Sponsor Alternate Contact	Sun Microsystems, Inc. – http://www.sun.com Jason Schaffer – jason.schaffer@sun.com 7777 Gateway Blvd 7, UNWK16 Newark, CA Phone: (510) 936-2979 FAX: (510) 936-2323
Auditor	Storage Performance Council – http://www.StoragePerformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.8
SPC-1 Workload Generator revision number	V2.00.04a
Date Results were first used publicly	September 20, 2004
Date FDR was submitted to the SPC	September 20, 2004
Date the TSC is/was available for shipment to customers	July 23, 2004
Date the TSC completed audit certification	August 27, 2004

Summary of Results

SPC-1 Results	
Tested Storage Configuration (TSC) Name: Sun StorEdge™ 6920 (8 tray)	
Metric	Reported Result
SPC-1 IOPS™	19,496.00
SPC-1 Price-Performance	\$12.10/SPC-1 IOPS™
Total ASU Capacity	1,222.000GB
Data Protection Level	Mirroring
Total TSC Price (including three-year maintenance)	\$235,875


SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-1 benchmark.


A Data Protection Level of Mirroring configures two or more identical copies of user data.

Storage Capacities and Relationships

The following diagram documents the various storage capacities, used in this benchmark, and their relationships.

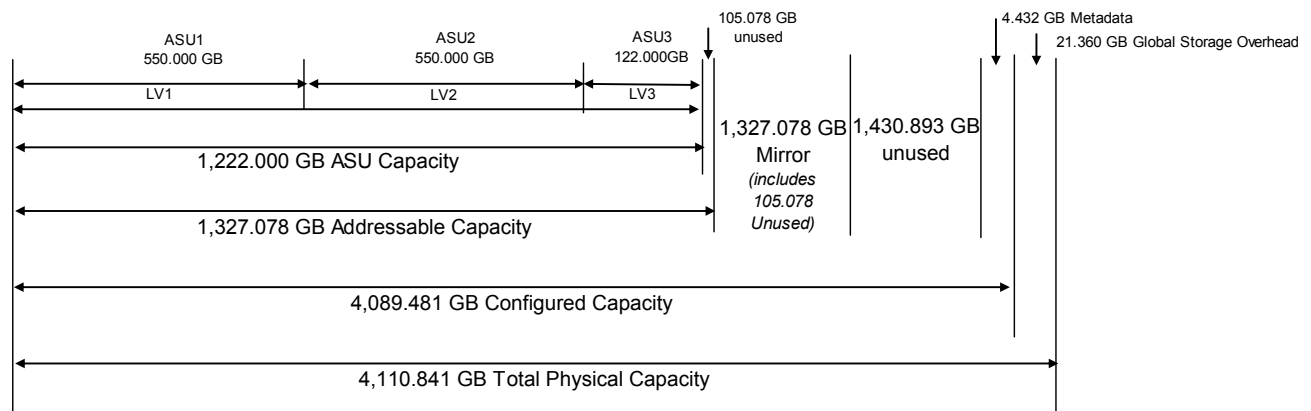

Response Time – Throughput Curve

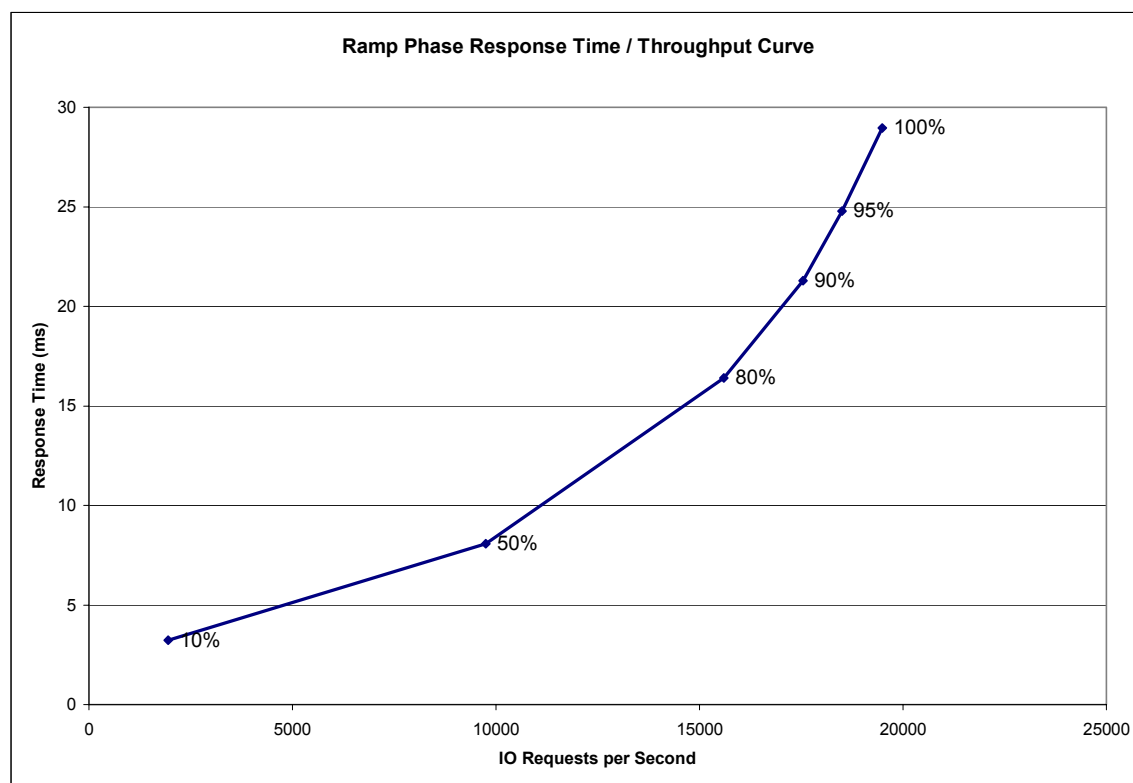

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	1,948.50	9,751.79	15,599.51	17,546.54	18,506.00	19,496.00
Average Response Time (ms):						
All ASUs	3.23	8.07	16.40	21.29	24.79	28.95
ASU-1	3.70	8.42	16.30	20.89	24.20	28.03
ASU-2	3.23	7.75	15.94	20.74	24.08	28.25
ASU-3	2.24	7.46	16.83	22.39	26.35	31.22
Reads	5.18	9.97	17.45	21.60	24.57	28.04
Writes	1.96	6.83	15.72	21.09	24.93	29.55

Tested Storage Configuration Pricing (*Priced Storage Configuration*)

Part Number	Description	Quantity	US List	Total		Ave. Price
TA6920-DSP-2F	Base system with 16 FC ports	1	\$56,995	\$56,995	32%	\$38,757
TA6020M22A1S1008	Storage module with 28 36GB 15k rpm	4	\$66,890	\$267,560	32%	\$181,941
XTA6920-SPM-UNLTB	Storage Pool Management	1	\$9,200	\$9,200	32%	\$6,256
X6767A	2Gb PCI Single FC Network Adapter	8	\$1,560	\$12,480	32%	\$8,486
X9733A	5M LC to LC FC Optical Cable	8	\$80	\$640	32%	\$435
Total			\$134,725	\$346,875		\$235,875


Three year “Gold Service” System Maintenance is included, which provides the following:

- 7 days per week, 24 hours per day coverage.
- Acknowledgement of new and existing problems within four hours.
- Onsite presence of a qualified maintenance engineer or provision of a customer replaceable part within four hours of the above acknowledgement for any hardware failure that results in an inoperative Priced Storage Configuration component. In either of the two cases, the remedy will result in resumption of operation.

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the Tested Storage Configuration (TSC) and the Priced Storage Configuration.

Benchmark Configuration/Tested Storage Configuration Diagram

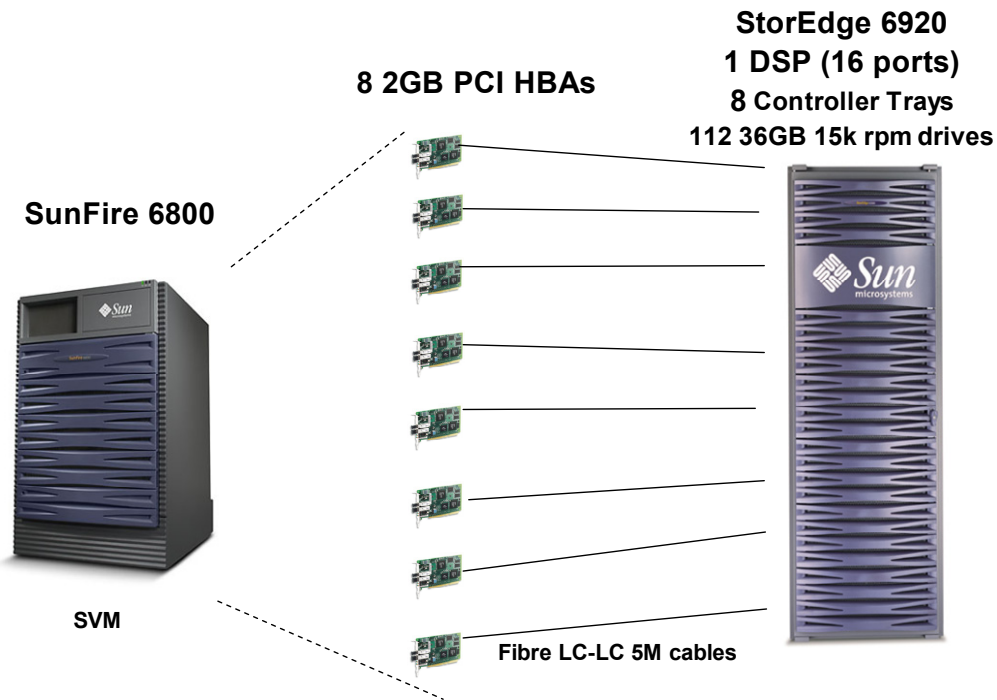

Host Systems:	Tested Storage Configuration (TSC):
UID=HS-1	8 – 2 Gb Single port FC HBAs
SunFire 6800	UID=SC-1:
24 – UltraSPARC™ III 900MHz CPUs with 8MB EEC External cache per CPU	Sun StorEdge 6920: 8 Controllers each with 1 tray 1 GB of cache per controller 14 – 36 GB, 15 K RPM drives per tray
48 GB main memory	
Solaris 9 update 6	
Solaris Volume Manager (SVM)	16 DSP FC Ports
PCI	112 – 36 GB 15K RPM disk drives
WG	

CONFIGURATION INFORMATION

Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram

Clause 9.2.4.4.1

A one page Benchmark Configuration (BC)/Tested Storage Configuration (TSC) diagram shall be included in the Executive Summary...

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page 13 (*Benchmark Configuration/Tested Storage Configuration Diagram*).

Storage Network Configuration

Clause 9.2.4.4.2

If a storage network is employed in the BC/TSC, the FDR shall contain a topology diagram... . This diagram should include, but is not limited to the following components:

- 1. Storage Controller and Domain Controllers (see Clause 9.2.4.4.1)*
- 2. Host Systems (see Clause 9.2.4.4.1)*
- 3. Routers and Bridges*
- 4. Hubs and Switches*
- 5. HBAs to Host Systems and Front End Port to Storage Controllers*

Additionally the diagram shall:

- Illustrate the physical connection between components.*
- Describe the type of each physical connection.*
- Describe the network protocol used over each physical connection.*
- The maximum theoretical transfer rate of each class of interconnect used in the configuration.*
- Correlate with the BC Configuration Diagram in Clause 9.2.4.4.1.*

The Test Sponsor shall additionally supply (referenced in an appendix) a wiring diagram of the physical connections and physical port assignments used in the storage network. The diagram should allow anyone to exactly replicate the physical configuration of the storage network.

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) was configured with local storage and, as such, did not employ a storage network.

Host System Configuration

Clause 9.2.4.4.3

The FDR shall minimally contain, for each Host System running the Workload Generator, a listing of the following:

- 1. Number and type of CPUs.*
- 2. Main memory capacity.*
- 3. Cache memory capacity.*
- 4. Number and type of disk controllers or Host Bus Adapters.*

The details of the Host System configuration may be found on page 13 (*Benchmark Configuration/Tested Storage Configuration Diagram*).

Customer Tunable Parameters and Options

Clause 9.2.4.5.1

All Benchmark Configuration (BC) components with customer tunable parameter and options that have been altered from their default values must be listed in the FDR. The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option.

“Appendix A: Customer Tunable Parameters and Options” on page 49 contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

Tested Storage Configuration (TSC) Description

Clause 9.2.4.5.2

The FDR must include sufficient information to recreate the logical representation of the TSC. In addition to customer tunable parameters and options (Clause 4.2.4.5.3), that information must include, at a minimum, a diagram and/or description of the following:

- *All physical components that comprise the TSC. Those components are also illustrated in the Benchmark Configuration (BC) diagram in Clause 9.2.4.4.1 and, if applicable, the Storage Network Configuration Diagram in Clause 9.2.4.4.2.*
- *The logical representation of the TSC, configured from the above components that will be presented to the Workload Generator.*

In addition the FDR may include listings of scripts and/or commands used to configure the physical components that comprise the TSC.

“Appendix B: Tested Storage Configuration (TSC) Creation” on page 52 contains the detailed information that describes how to create and configure the logical TSC.

SPC-1 Workload Generator Storage Configuration

Clause 9.2.4.5.3

The FDR must include all SPC-1 Workload Generator storage configuration commands and parameters.

The SPC-1 Workload Generator storage configuration commands and parameters for this measurement appear in “Appendix C: SPC-1 Workload Generator Storage Commands and Parameters” on page 61.

DATA REPOSITORY

Definitions

Total ASU Capacity: The total storage capacity read and written in the course of executing the SPC-1 benchmark.

Application Storage Unit (ASU): The logical interface between the storage and SPC-1 Workload Generator. The three ASUs (Data, User, and Log) are typically implemented on one or more Logical Volume.

Logical Volume: The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-1 benchmark. Each Logical Volume is implemented as a single, contiguous address space.

Addressable Storage Capacity: The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-1 Workload Generator.

Configured Storage Capacity: This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

Physical Storage Capacity: The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

Data Protection Overhead: The storage capacity required to implement the ECC data protection.

Required Storage: The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the three ASUs.

Global Storage Overhead: The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

Total Unused Storage: The amount of storage capacity available for use by application programs but not included in the Total ASU Capacity.

Storage Capacities and Relationships

Two tables and an illustration documenting the storage capacities and relationships of the SPC-1 Storage Hierarchy (Clause 2.1) shall be included in the FDR.

SPC-1 Storage Capacities

SPC-1 Storage Capacities		
Storage Hierarchy Component	Units	Capacity
Total ASU Capacity	Gigabytes (GB)	1,222.000
Addressable Storage Capacity	Gigabytes (GB)	1,327.078
Configured Storage Capacity	Gigabytes (GB)	4,089.481
Physical Storage Capacity	Gigabytes (GB)	4,110.841
Data Protection Overhead (mirror)	Gigabytes (GB)	1,327.078
Required Storage	Gigabytes (GB)	4.432
Global Storage Overhead	Gigabytes (GB)	21.360
Total Unused Storage	Gigabytes (GB)	1,430.893


SPC-1 Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	92.08%	29.88%	29.73%
Required for Data Protection (Mirroring)		32.45%	32.28%
Addressable Storage Capacity		32.45%	32.28%
Required Storage		0.11%	0.11%
Configured Storage Capacity			99.48%
Global Storage Overhead			0.52%
Unused Storage:			
Addressable	7.918%		
Configured		34.990%	
Physical			0.000%

The Physical Storage Capacity consisted of 4,110.841 GB distributed over 112 disk drives each with a formatted capacity of 36.704 GB. There was 0.000 GB (0.00 %) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 21.360 GB (0.52 %) of Physical Storage Capacity. There was 1,430.893 GB (34.990%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 92.08% of the Addressable Storage Capacity resulting in 105.078 GB (7.918%) of Unused Storage within the Addressable Storage Capacity.

SPC-1 Storage Capacities and Relationships Illustration

The various storage capacities configured in the benchmark result are illustrated below (not to scale).

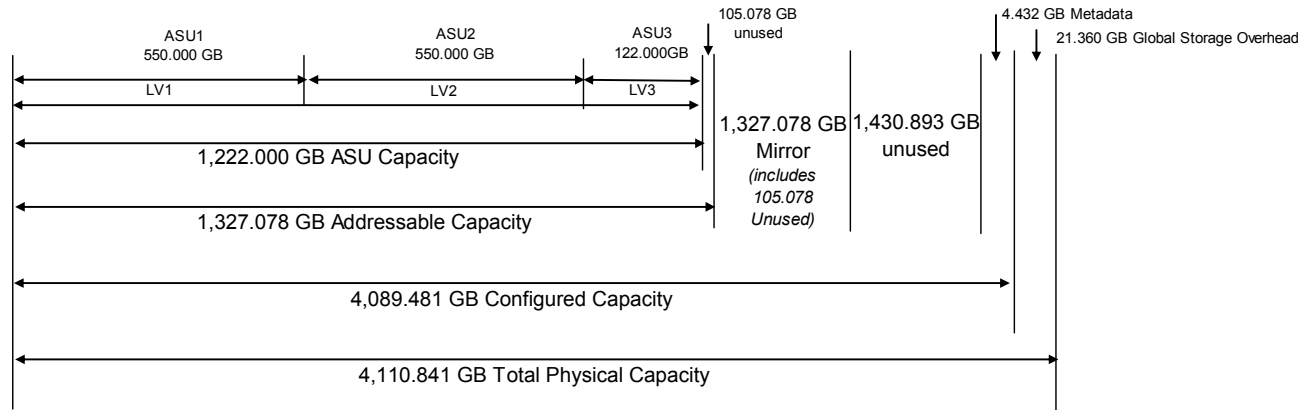

Logical Volume Capacity and ASU Mapping

Clause 9.2.4.6.2

A table illustrating the capacity of each ASU and the mapping of Logical Volumes to ASUs shall be provided in the FDR. Logical Volumes shall be sequenced in the table from top to bottom per its position in the contiguous address space of each ASU. The capacity of each Logical Volume shall be stated. ... In conjunction with this table, the Test Sponsor shall provide a complete description of the type of data protection (see Clause 2.4.5) used on each Logical Volume.

Logical Volume Capacity and Mapping		
ASU-1 (550.000 GB)	ASU-2 (550.000 GB)	ASU-3 (122.000 GB)
1 Logical Volume 599.785 GB per Logical Volume (555.000 GB used per Logical Volume)	1 Logical Volume 591.397 GB per Logical Volume (555.000 GB used per Logical Volume)	1 Logical Volume 135.895 GB per Logical Volume (122.000 GB used per Logical Volume)

The Data Protection Level used for all Logical Volumes was Mirroring as described on page 10. See “ASU Configuration” in the [IOPS Test Results File](#) for more detailed configuration information.

SPC-1 BENCHMARK EXECUTION RESULTS

Definitions

Average Response Time: *The sum of the Response Times for all Measured I/O Requests divided by the total number of Measured I/O Requests.*

I/O Request Throughput: *The total number of Measured I/O requests in an SPC-1 Test Run divided by the duration of the Measurement Interval in seconds.*

Measurement Interval: *The finite and contiguous time period, after the Tested Storage Configuration (TSC) has reached Steady State, when data is collected by a Test Sponsor to generate an SPC-1 test result or support an SPC-1 test result.*

Steady State: *The consistent and sustainable throughput of the TSC. During this period the load presented to the TSC by the Workload Generator is constant. Comment: Steady Stated is achieved only after caches in the TSC have filled and as a result the I/O Request throughput of the TSC has stabilized.*

Test: *A collection of Test Phases or Test Runs sharing a common objective.*

Test Phase: *A collection of one or more SPC-1 Test Runs sharing a common objective and intended to be run in a specific sequence.*

Test Run: *The execution of SPC-1 for the purpose of producing or supporting an SPC-1 result. SPC-1 Test Runs may have a finite and measured Ramp-Up period, Start-Up period, Shut-Down period, and Ramp-Down period as illustrated in the Figure 5-1 below. All SPC-1 Test Runs shall have a Steady State period and a Measurement Interval.*

The SPC-1 benchmark consists of the following Tests, Test Phases, and Test Runs:

- **Data Persistence Test**
 - Data Persistence Test Run 1
 - Data Persistence Test Run 2
- **Primary Metrics Test**
 - Sustainability Test Phase and Test Run
 - IOPS Test Phase and Test Run
 - Response Time Ramp Test Phase
 - 95% of IOPS Test Run
 - 90% of IOPS Test Run
 - 80% of IOPS Test Run
 - 50% of IOPS Test Run
 - 10% of IOPS Test Run (LRT)
- **Repeatability Test**
 - Repeatability Test Phase 1
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
 - Repeatability Test Phase 2
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed. The Tests may be executed in any sequence.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

Primary Metrics Test – Sustainability Test Phase

Clause 5.4.2.1

The Sustainability Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of three (3) hours. The intent is to demonstrate a sustained maximum I/O Request Throughput as well as insuring the Tested Storage Configuration (TSC) has reached steady state prior to measuring the maximum I/O Request Throughput (SPC-1™ IOPS).

The reported I/O Request Throughput of the Sustainability Test Run must be within 5% of the reported SPC-1™ IOPS primary metric. The Average Response Time measured in Sustainability Test Run cannot exceed thirty (30) milliseconds.

Clause 9.2.4.7.1

For the Sustainability Test Phase the FDR shall contain:

- 1. A Data Rate Distribution (data table and graph).*
- 2. I/O Request Throughput Distribution (data table and graph).*
- 3. The human readable Test Run Results File produced by the Workload Generator.*
- 4. A listing or screen image of all input parameters supplied to the Workload Generator.*
- 5. The Measured Intensity Multiplier for each I/O stream.*
- 6. The variability of the Measured Intensity Multiplier, as defined in Clause 5.3.13.3.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are documented in “Appendix D: SPC-1 Workload Generator Input Parameters” on Page 62.

Sustainability Test Results File


A link to the test results file generated from the Sustainability Test Run is listed below.

[Sustainability Test Results File](#)


Sustainability – Data Rate Distribution Data (MB/second)

Interval	All ASUs	ASU1	ASU2	ASU3	Interval	All ASUs	ASU1	ASU2	ASU3	Interval	All ASUs	ASU1	ASU2	ASU3
0	160.25	62.05	17.04	81.16	63	160.29	62.06	17.14	81.09	126	160.36	62.14	17.22	81.01
1	159.60	62.06	17.01	80.54	64	159.95	62.26	17.01	80.68	127	159.81	62.09	17.15	80.57
2	159.65	62.09	17.05	80.51	65	159.84	62.14	17.00	80.70	128	160.12	62.12	17.06	80.94
3	160.22	62.17	17.07	80.98	66	160.46	62.24	17.11	81.11	129	160.59	62.39	17.24	80.96
4	160.12	62.15	17.14	80.84	67	159.94	62.08	17.03	80.83	130	160.15	61.99	17.13	81.02
5	160.25	62.09	17.06	81.09	68	160.06	62.36	17.15	80.54	131	160.03	62.26	17.08	80.69
6	160.46	62.16	17.08	81.23	69	159.95	62.08	16.99	80.89	132	160.51	62.32	17.09	81.09
7	160.47	62.15	17.02	81.29	70	159.81	62.33	17.02	80.46	133	159.70	62.00	17.09	80.61
8	160.56	62.26	17.07	81.24	71	160.07	62.26	17.08	80.73	134	159.94	62.18	17.03	80.73
9	159.53	62.17	17.12	80.24	72	159.32	61.92	17.15	80.25	135	159.98	62.00	17.22	80.76
10	159.86	62.03	17.09	80.75	73	160.60	62.49	17.15	80.96	136	160.42	62.13	17.20	81.10
11	160.37	62.24	17.13	81.00	74	160.07	62.22	16.91	80.95	137	159.98	62.06	17.18	80.74
12	160.04	62.02	17.22	80.80	75	160.33	62.34	17.07	80.91	138	159.94	62.12	17.32	80.50
13	159.64	62.14	17.07	80.44	76	159.84	62.12	17.15	80.58	139	160.00	62.13	17.15	80.72
14	160.74	62.27	17.18	81.29	77	159.79	62.26	17.04	80.48	140	159.80	62.02	16.95	80.83
15	160.23	62.13	17.15	80.95	78	159.75	62.04	17.06	80.65	141	159.68	62.18	17.03	80.47
16	159.75	62.17	16.92	80.65	79	159.81	62.12	17.02	80.68	142	160.05	62.19	17.08	80.78
17	159.96	62.16	17.19	80.61	80	159.98	62.18	16.98	80.83	143	160.38	62.43	17.08	80.88
18	159.66	62.05	17.03	80.58	81	160.12	62.15	17.16	80.81	144	160.01	62.31	17.00	80.70
19	160.21	62.15	17.13	80.93	82	160.19	62.22	17.06	80.90	145	159.89	62.13	17.13	80.63
20	160.05	62.09	17.12	80.84	83	160.06	61.95	17.10	81.01	146	160.11	62.32	17.08	80.71
21	159.84	62.03	17.03	80.78	84	159.79	62.02	17.12	80.65	147	160.16	62.27	17.04	80.85
22	159.76	62.13	17.14	80.49	85	159.98	62.34	17.07	80.57	148	159.67	62.14	17.05	80.48
23	159.48	61.87	17.06	80.55	86	159.77	62.16	17.09	80.52	149	160.12	62.27	17.10	80.75
24	160.44	62.33	17.24	80.87	87	160.19	62.17	17.11	80.91	150	160.25	62.27	17.09	80.89
25	160.37	62.18	17.12	81.08	88	159.92	62.32	16.99	80.61	151	159.84	62.19	17.05	80.60
26	159.93	62.19	17.14	80.60	89	159.94	62.23	16.96	80.76	152	160.16	62.25	17.02	80.90
27	160.02	62.20	17.11	80.71	90	159.65	62.19	16.93	80.53	153	160.01	62.24	17.09	80.68
28	159.69	62.03	17.03	80.64	91	160.20	62.21	17.06	80.93	154	159.52	62.19	17.09	80.23
29	159.64	62.20	17.03	80.41	92	160.15	62.11	17.17	80.87	155	160.29	62.13	17.27	80.88
30	159.62	62.07	17.09	80.45	93	159.84	62.16	17.17	80.51	156	160.03	62.14	17.12	80.77
31	160.13	62.17	16.98	80.97	94	160.43	62.24	17.12	81.07	157	159.58	62.21	16.94	80.42
32	160.46	62.33	17.12	81.01	95	160.30	62.16	17.18	80.95	158	160.22	62.21	17.07	80.94
33	160.11	61.98	17.13	80.99	96	159.85	62.03	17.09	80.73	159	160.06	62.08	17.03	80.95
34	159.83	62.19	16.97	80.67	97	159.47	62.16	17.08	80.23	160	160.24	62.27	17.06	80.91
35	159.98	62.12	16.98	80.88	98	160.32	62.30	16.97	81.05	161	160.02	62.19	17.12	80.70
36	159.73	62.05	17.02	80.66	99	160.18	62.16	17.15	80.87	162	160.16	62.09	17.13	80.94
37	159.85	62.07	17.07	80.71	100	159.52	61.92	17.01	80.59	163	159.60	62.09	17.06	80.44
38	159.54	61.96	17.12	80.45	101	159.88	61.98	17.13	80.76	164	160.11	62.05	17.06	81.00
39	160.31	62.36	17.13	80.82	102	159.98	62.20	17.14	80.63	165	160.32	62.13	17.09	81.10
40	160.34	62.23	17.10	81.01	103	160.34	62.37	16.98	80.98	166	159.91	62.24	17.14	80.53
41	160.36	62.23	17.05	81.08	104	159.72	61.94	17.05	80.73	167	159.80	62.09	17.10	80.60
42	160.34	62.39	17.05	80.89	105	159.90	62.06	17.06	80.79	168	159.75	61.95	17.15	80.65
43	159.93	62.16	17.18	80.59	106	159.91	62.20	17.06	80.65	169	159.77	62.02	17.10	80.66
44	160.07	62.15	16.97	80.96	107	160.19	62.17	17.09	80.93	170	160.50	62.19	17.12	81.19
45	159.85	62.08	17.02	80.74	108	160.01	62.06	17.15	80.80	171	159.58	61.94	16.91	80.73
46	160.01	62.28	17.07	80.66	109	160.36	62.28	17.06	81.02	172	160.00	62.14	17.08	80.78
47	160.15	62.04	17.19	80.92	110	159.66	62.16	17.12	80.37	173	159.86	62.17	17.13	80.56
48	159.97	62.23	17.02	80.72	111	160.38	62.02	17.17	81.19	174	160.00	62.13	16.90	80.97
49	159.96	62.14	17.05	80.77	112	159.69	62.23	16.83	80.63	175	159.68	62.19	17.06	80.42
50	160.10	62.01	17.14	80.95	113	160.57	62.20	17.16	81.21	176	160.01	62.04	17.02	80.96
51	159.96	62.05	17.04	80.88	114	160.18	62.14	17.21	80.82	177	160.10	62.02	17.15	80.93
52	159.93	62.26	16.99	80.68	115	159.97	62.12	17.08	80.78	178	160.42	62.34	17.08	81.00
53	159.68	62.01	16.94	80.73	116	160.26	62.18	17.08	81.01	179	160.48	62.23	17.11	81.14
54	159.96	62.19	17.05	80.71	117	160.44	62.32	17.14	80.97	180	160.03	62.13	17.11	80.79
55	160.01	62.31	17.25	80.45	118	160.07	62.24	17.10	80.73	181	159.86	62.13	17.11	80.62
56	160.00	62.14	16.91	80.95	119	159.87	62.08	17.04	80.75	182	160.47	62.23	17.03	81.21
57	160.03	62.06	17.12	80.86	120	160.50	62.11	17.20	81.19					
58	160.38	62.11	17.15	81.12	121	160.19	62.33	17.10	80.77					
59	160.13	62.19	17.06	80.88	122	160.07	62.15	17.10	80.82					
60	159.91	62.10	17.02	80.79	123	160.34	62.06	17.09	81.19					
61	159.71	62.19	17.02	80.50	124	159.90	62.05	17.16	80.69					
62	159.82	61.99	17.13	80.70	125	160.26	62.12	17.13	81.01					

Sustainability – Data Rate Distribution Graph

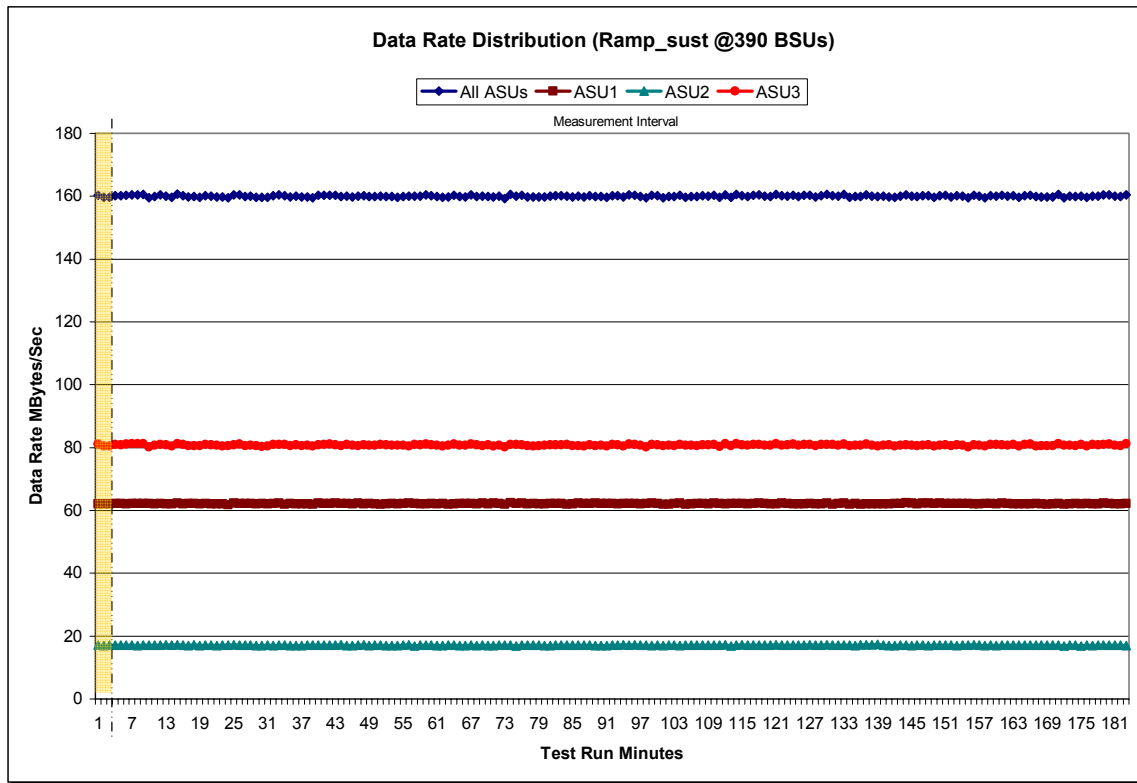

Sustainability – I/O Request Throughput Distribution Graph

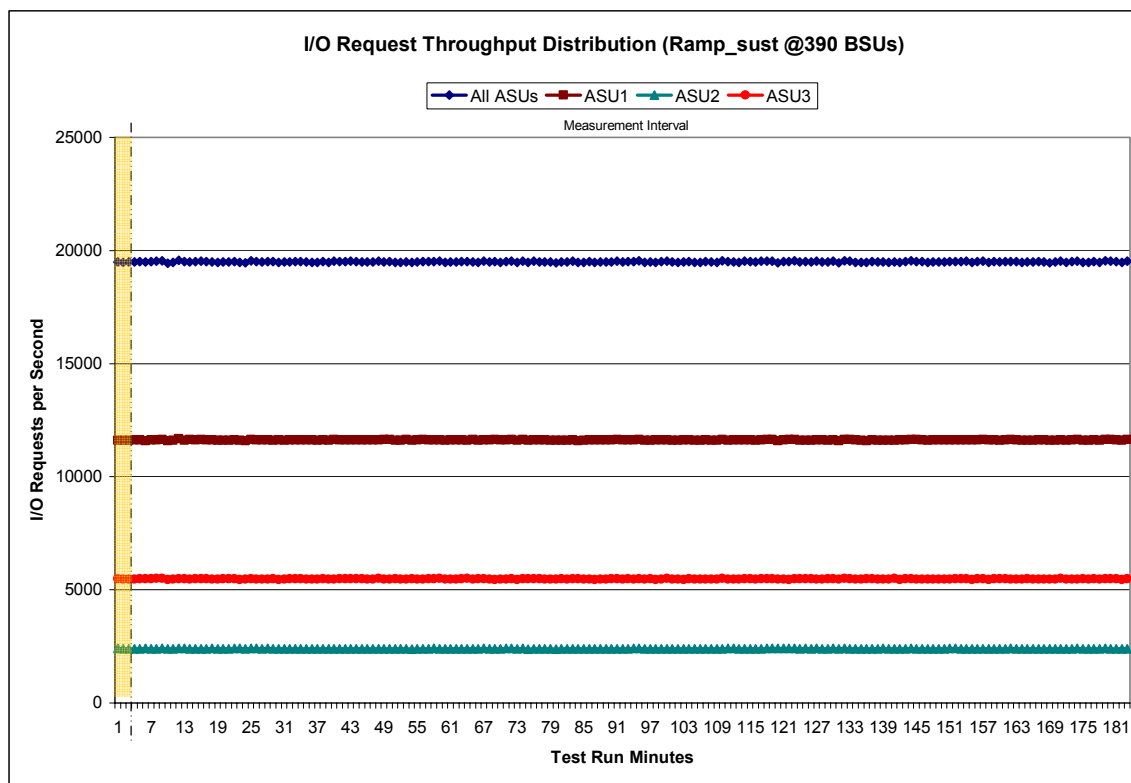

Sustainability – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0250	0.2810
COV	0.005	0.001	0.003	0.002	0.006	0.003	0.005	0.002

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Primary Metrics Test – IOPS Test Phase

Clause 5.4.2.2

The IOPS Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of ten (10) minutes. The IOPS Test Phase immediately follows the Sustainability Test Phase without any interruption or manual intervention.

The IOPS Test Run generates the SPC-1 IOPS™ primary metric, which is computed as the I/O Request Throughput for the Measurement Interval of the IOPS Test Run.

The Average Response Time is computed for the IOPS Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds the 30 millisecond constraint, the measurement is invalid.

Clause 9.2.4.7.2

For the IOPS Test Phase the FDR shall contain:

- 1. I/O Request Throughput Distribution (data and graph).*
- 2. A Response Time Frequency Distribution.*
- 3. An Average Response Time Distribution.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*
- 6. The total number of I/O Requests completed in the Measurement Interval as well as the number of I/O Requests with a Response Time less than or equal to 30 milliseconds and the number of I/O Requests with a Response Time greater than 30 milliseconds.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are documented in “Appendix D: SPC-1 Workload Generator Input Parameters” on Page 62.

IOPS Test Results File


A link to the test results file generated from the IOPS Test Run is listed below.

[IOPS Test Results File](#)

IOPS Test Run – I/O Request Throughput Distribution Data

390 BSUs				
	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:03:12	22:06:13	0-2	0:03:01
<i>Measurement Interval</i>	22:06:13	22:16:13	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	19,531.37	11,654.82	2,394.30	5,482.25
1	19,512.10	11,643.32	2,397.27	5,471.52
2	19,513.73	11,624.97	2,396.80	5,491.97
3	19,469.93	11,609.95	2,389.93	5,470.05
4	19,512.25	11,633.62	2,395.50	5,483.13
5	19,515.17	11,630.60	2,411.08	5,473.48
6	19,500.27	11,621.85	2,398.80	5,479.62
7	19,481.05	11,601.63	2,398.02	5,481.40
8	19,465.03	11,599.40	2,394.93	5,470.70
9	19,524.45	11,642.58	2,401.00	5,480.87
10	19,521.43	11,636.70	2,395.72	5,489.02
11	19,473.40	11,601.60	2,391.42	5,480.38
12	19,496.97	11,622.57	2,395.65	5,478.75
Average	19,496.00	11,620.05	2,397.21	5,478.74


IOPS Test Run – I/O Request Throughput Distribution Graph

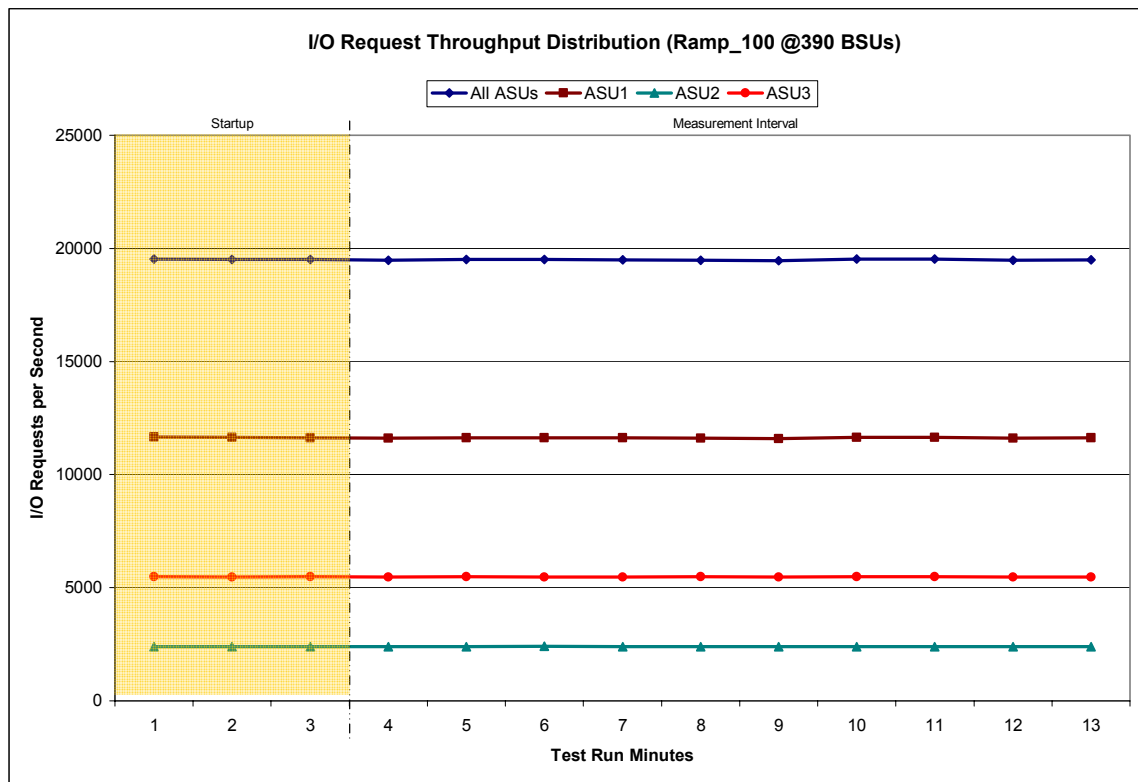

IOPS Test Run – Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	0	-	1,008	7,596	11,863	14,735	16,806	19,558
Write	0	-	-	-	47	1,610	5,346	9,358
All ASUs	0	-	1,008	7,596	11,910	16,345	22,152	28,916
ASU1	0	-	759	5,501	8,647	11,561	15,152	19,291
ASU2	0	-	249	2,095	3,254	4,388	5,446	6,730
ASU3	0	-	-	-	9	396	1,554	2,895
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	43,455	37,542	27,058	21,242	20,499	23,902	66,920	98,599
Write	36,561	65,124	87,277	98,364	99,991	94,916	172,238	158,891
All ASUs	80,016	102,666	114,335	119,606	120,490	118,818	239,158	257,490
ASU1	51,015	61,749	65,223	66,180	66,198	66,122	139,344	159,709
ASU2	16,933	19,093	18,497	17,942	16,817	16,128	30,410	31,506
ASU3	12,068	21,824	30,615	35,484	37,475	36,568	69,404	66,275
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	125,339	135,222	105,906	633,804	574,312	505,908	429,286	1,693,277
Write	157,535	156,517	127,441	821,777	767,903	745,407	629,767	2,847,135
All ASUs	282,874	291,739	233,347	1,455,581	1,342,215	1,251,315	1,059,053	4,540,412
ASU1	182,534	189,947	149,838	918,298	831,797	756,940	632,686	2,573,196
ASU2	34,599	36,158	29,486	176,334	160,402	146,468	125,028	540,292
ASU3	65,741	65,634	54,023	360,949	350,016	347,907	301,339	1,426,924


IOPS Test Run –Response Time Frequency Distribution Graph

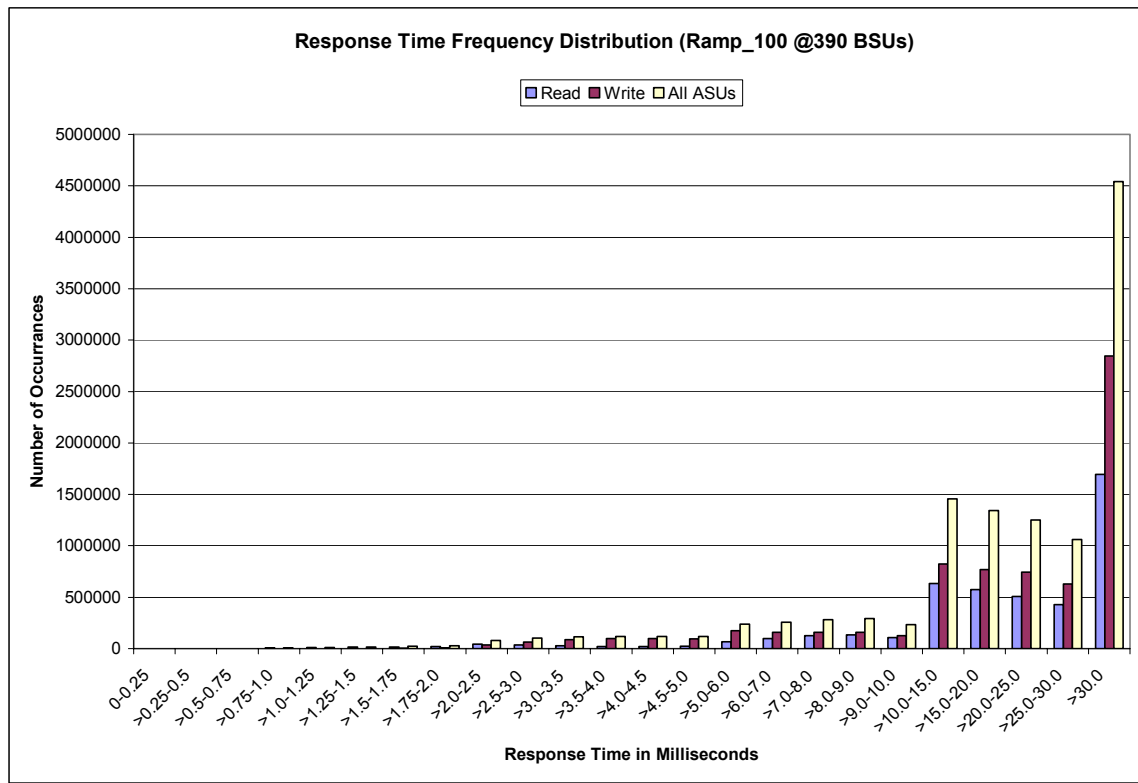

IOPS Test Run – Average Response Time (ms) Distribution Data

390 BSUs		Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>		22:03:12	22:06:13	0-2	0:03:01
<i>Measurement Interval</i>		22:06:13	22:16:13	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3	
0	30.06	29.09	29.24	32.49	
1	31.75	30.77	30.75	34.27	
2	28.55	27.62	27.67	30.90	
3	27.18	26.33	26.50	29.30	
4	29.28	28.37	28.49	31.56	
5	30.84	29.82	30.09	33.33	
6	30.41	29.44	29.67	32.80	
7	28.27	27.40	27.53	30.45	
8	27.25	26.41	26.43	29.40	
9	28.96	28.03	28.39	31.19	
10	30.13	29.10	29.56	32.57	
11	29.64	28.66	29.13	31.93	
12	27.55	26.74	26.72	29.64	
Average	28.95	28.03	28.25	31.22	

IOPS Test Run – Average Response Time (ms) Distribution Graph

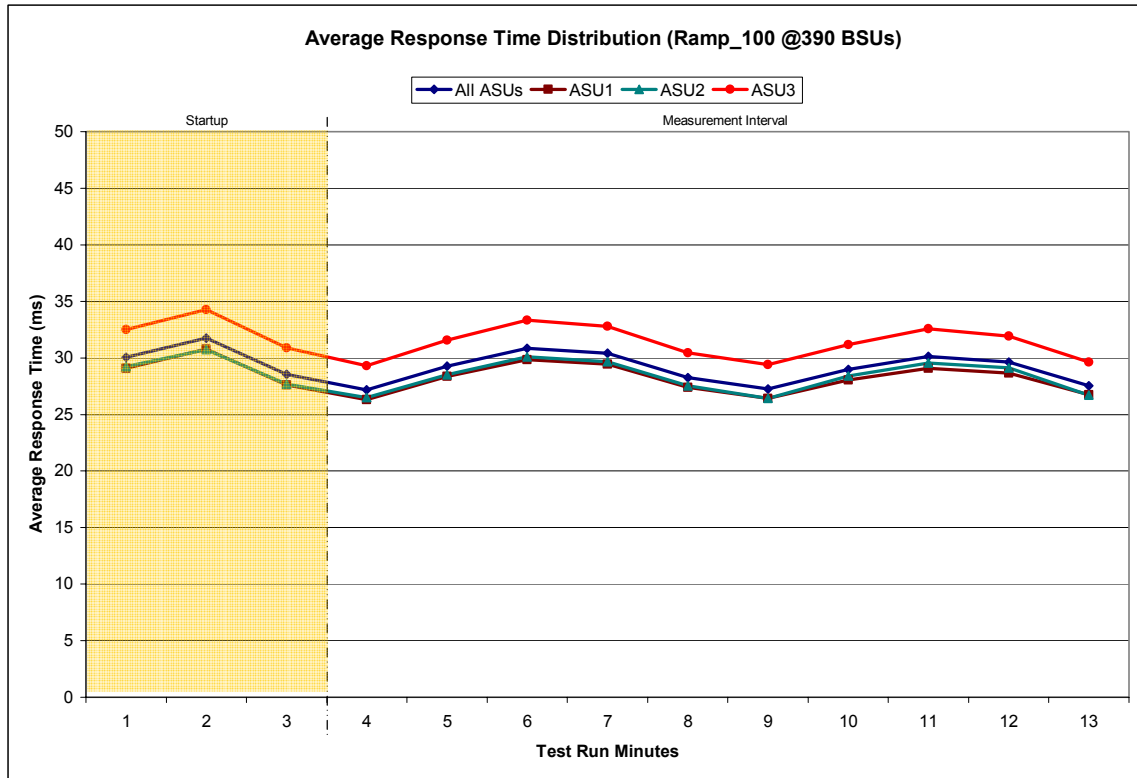

IOPS Test Run – I/O Request Information

I/O Requests Completed in the Measurement Interval	I/O Requests Completed with Response Time = or < 30 ms	I/O Requests Completed with Response Time > 30 ms
11,697,042	7,156,630	4,540,412

IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0351	0.2809	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.006	0.001	0.003	0.002	0.006	0.003	0.004	0.001

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Primary Metrics Test – Response Time Ramp Test Phase

Clause 5.4.2.3

The Response Time Ramp Test Phase consists of five Test Runs, one each at 95%, 90%, 80%, 50%, and 10% of the load point (100%) used to generate the SPC-1 IOPS™ primary metric. Each of the five Test Runs has a Measurement Interval of ten (10) minutes. The Response Time Ramp Test Phase immediately follows the IOPS Test Phase without any interruption or manual intervention.

The five Response Time Ramp Test Runs, in conjunction with the IOPS Test Run (100%), demonstrate the relationship between Average Response Time and I/O Request Throughput for the Tested Storage Configuration (TSC) as illustrated in the response time/throughput curve on page 11.

In addition, the Average Response Time measured during the 10% Test Run is the value for the SPC-1 LRT™ primary metric. That value represents the Average Response Time of a lightly loaded TSC.

Clause 9.2.4.7.3

The following content shall appear in the FDR for the Response Time Ramp Phase:

- 1. A Response Time Ramp Distribution.*
- 2. The human readable Test Run Results File produced by the Workload Generator for each Test Run within the Response Time Ramp Test Phase.*
- 3. For the 10% Load Level Test Run (SPC-1 LRT™ metric) an Average Response Time Distribution.*
- 4. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are documented in “Appendix D: SPC-1 Workload Generator Input Parameters” on Page 62.

Response Time Ramp Test Results File

A link to each test result file generated from each Response Time Ramp Test Run list listed below.

[95% Load Level](#)

[90% Load Level](#)

[80% Load Level](#)

[50% Load Level](#)


[10% Load Level](#)

Response Time Ramp Distribution (IOPS) Data

The five Test Runs that comprise the Response Time Ramp Phase are executed at 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit (BSU) load level used to produce the SPC-1 IOPS™ primary metric. The 100% BSU load level is included in the following Response Time Ramp data tables and graphs for completeness.

100% Load Level - 390 BSUs					95% Load Level - 370 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:03:12	22:06:13	0-2	0:03:01	Start-Up/Ramp-Up	22:16:22	22:19:23	0-2	0:03:01
Measurement Interval	22:06:13	22:16:13	3-12	0:10:00	Measurement Interval	22:19:23	22:29:23	3-12	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	19,531.37	11,654.82	2,394.30	5,482.25	0	18,506.52	11,038.75	2,269.55	5,198.22
1	19,512.10	11,643.32	2,397.27	5,471.52	1	18,475.10	11,013.17	2,275.57	5,186.37
2	19,513.73	11,624.97	2,396.80	5,491.97	2	18,484.27	11,034.77	2,267.37	5,182.13
3	19,469.93	11,609.95	2,389.93	5,470.05	3	18,223.52	10,848.02	2,245.18	5,130.32
4	19,512.25	11,633.62	2,395.50	5,483.13	4	18,823.17	11,217.00	2,322.52	5,283.65
5	19,515.17	11,630.60	2,411.08	5,473.48	5	18,504.27	11,027.62	2,278.37	5,198.28
6	19,500.27	11,621.85	2,398.80	5,479.62	6	18,492.45	11,025.87	2,278.97	5,187.62
7	19,481.05	11,601.63	2,398.02	5,481.40	7	18,481.07	11,003.57	2,272.78	5,204.72
8	19,465.03	11,599.40	2,394.93	5,470.70	8	18,518.15	11,025.38	2,278.97	5,213.80
9	19,524.45	11,642.58	2,401.00	5,480.87	9	18,507.13	11,038.28	2,274.28	5,194.57
10	19,521.43	11,636.70	2,395.72	5,489.02	10	18,533.52	11,035.27	2,283.77	5,214.48
11	19,473.40	11,601.60	2,391.42	5,480.38	11	18,490.22	11,025.57	2,266.57	5,198.08
12	19,496.97	11,622.57	2,395.65	5,478.75	12	18,486.50	11,010.75	2,276.83	5,198.92
Average	19,496.00	11,620.05	2,397.21	5,478.74	Average	18,506.00	11,025.73	2,277.82	5,202.44
90% Load Level - 351 BSUs					80% Load Level - 312 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:29:30	22:32:31	0-2	0:03:01	Start-Up/Ramp-Up	22:42:38	22:45:39	0-2	0:03:01
Measurement Interval	22:32:31	22:42:31	3-12	0:10:00	Measurement Interval	22:45:39	22:55:39	3-12	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	17,574.67	10,469.15	2,174.82	4,930.70	0	15,573.37	9,285.88	1,909.63	4,377.85
1	17,543.55	10,468.77	2,154.82	4,919.97	1	15,581.78	9,270.45	1,916.30	4,395.03
2	17,536.40	10,447.63	2,160.32	4,928.45	2	15,605.83	9,298.87	1,921.97	4,385.00
3	17,530.37	10,444.07	2,156.82	4,929.48	3	15,606.08	9,304.35	1,922.12	4,379.62
4	17,556.60	10,472.50	2,156.42	4,927.68	4	15,578.27	9,269.58	1,925.55	4,383.13
5	17,541.02	10,453.10	2,162.32	4,925.60	5	15,619.50	9,326.45	1,913.92	4,379.13
6	17,554.15	10,444.70	2,160.48	4,948.97	6	15,579.92	9,281.97	1,923.57	4,374.38
7	17,560.27	10,456.17	2,163.62	4,940.48	7	15,593.03	9,296.92	1,922.28	4,373.83
8	17,556.42	10,465.50	2,156.37	4,934.55	8	15,610.07	9,313.78	1,912.85	4,383.43
9	17,547.23	10,466.35	2,157.22	4,923.67	9	15,602.12	9,296.00	1,920.90	4,385.22
10	17,565.63	10,470.23	2,156.23	4,939.17	10	15,601.40	9,302.83	1,927.95	4,370.62
11	17,532.75	10,441.65	2,159.32	4,931.78	11	15,638.07	9,321.07	1,930.72	4,386.28
12	17,520.93	10,449.47	2,160.70	4,910.77	12	15,566.60	9,276.63	1,911.95	4,378.02
Average	17,546.54	10,456.37	2,158.95	4,931.22	Average	15,599.51	9,298.96	1,921.18	4,379.37
50% Load Level - 195 BSUs					10% Load Level - 39 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:55:45	22:58:46	0-2	0:03:01	Start-Up/Ramp-Up	23:08:52	23:11:53	0-2	0:03:01
Measurement Interval	22:58:46	23:08:46	3-12	0:10:00	Measurement Interval	23:11:53	23:21:53	3-12	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	9,751.05	5,818.28	1,198.58	2,734.18	0	1,938.75	1,154.38	240.65	543.72
1	9,760.68	5,812.37	1,199.12	2,749.20	1	1,942.68	1,158.42	240.72	543.55
2	9,742.83	5,809.32	1,194.35	2,739.17	2	1,964.15	1,171.72	242.48	549.95
3	9,758.28	5,818.93	1,202.22	2,737.13	3	1,941.85	1,159.12	238.60	544.13
4	9,749.57	5,805.02	1,202.47	2,742.08	4	1,942.92	1,158.85	238.00	546.07
5	9,770.42	5,824.30	1,196.85	2,749.27	5	1,947.97	1,161.30	239.50	547.17
6	9,729.20	5,798.68	1,196.43	2,734.08	6	1,944.92	1,156.58	238.70	549.63
7	9,759.00	5,817.73	1,197.18	2,744.08	7	1,952.65	1,165.12	240.37	547.17
8	9,736.03	5,794.48	1,198.70	2,742.85	8	1,957.15	1,170.15	237.70	549.30
9	9,761.85	5,812.25	1,204.40	2,745.20	9	1,950.55	1,160.68	238.73	551.13
10	9,740.98	5,806.35	1,198.45	2,736.18	10	1,950.12	1,160.37	242.07	547.68
11	9,753.50	5,824.80	1,195.22	2,733.48	11	1,953.78	1,164.43	239.90	549.45
12	9,759.05	5,819.50	1,199.45	2,740.10	12	1,943.05	1,162.28	236.95	543.82
Average	9,751.79	5,812.21	1,199.14	2,740.45	Average	1,948.50	1,161.89	239.05	547.56


Response Time Ramp Distribution (IOPS) Graph

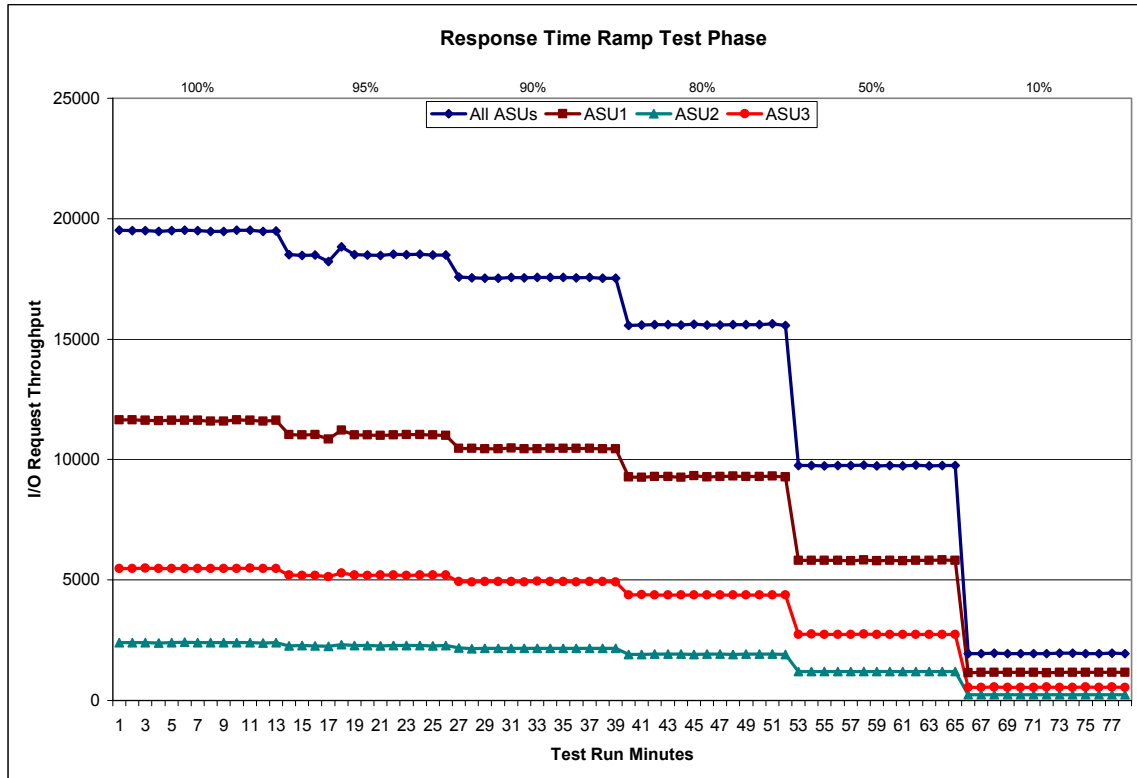

SPC-1 LRT™ Average Response Time (ms) Distribution Data

39 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:08:52	23:11:53	0-2	0:03:01
<i>Measurement Interval</i>	23:11:53	23:21:53	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	3.42	3.96	3.41	2.28
1	3.24	3.72	3.22	2.22
2	3.20	3.66	3.21	2.22
3	3.24	3.71	3.20	2.25
4	3.29	3.76	3.33	2.29
5	3.29	3.75	3.31	2.31
6	3.17	3.64	3.14	2.19
7	3.20	3.66	3.21	2.22
8	3.18	3.64	3.15	2.22
9	3.34	3.81	3.35	2.34
10	3.26	3.74	3.26	2.24
11	3.22	3.69	3.22	2.24
12	3.14	3.60	3.15	2.14
Average	3.23	3.70	3.23	2.24

SPC-1 LRT™ Average Response Time (ms) Distribution Graph

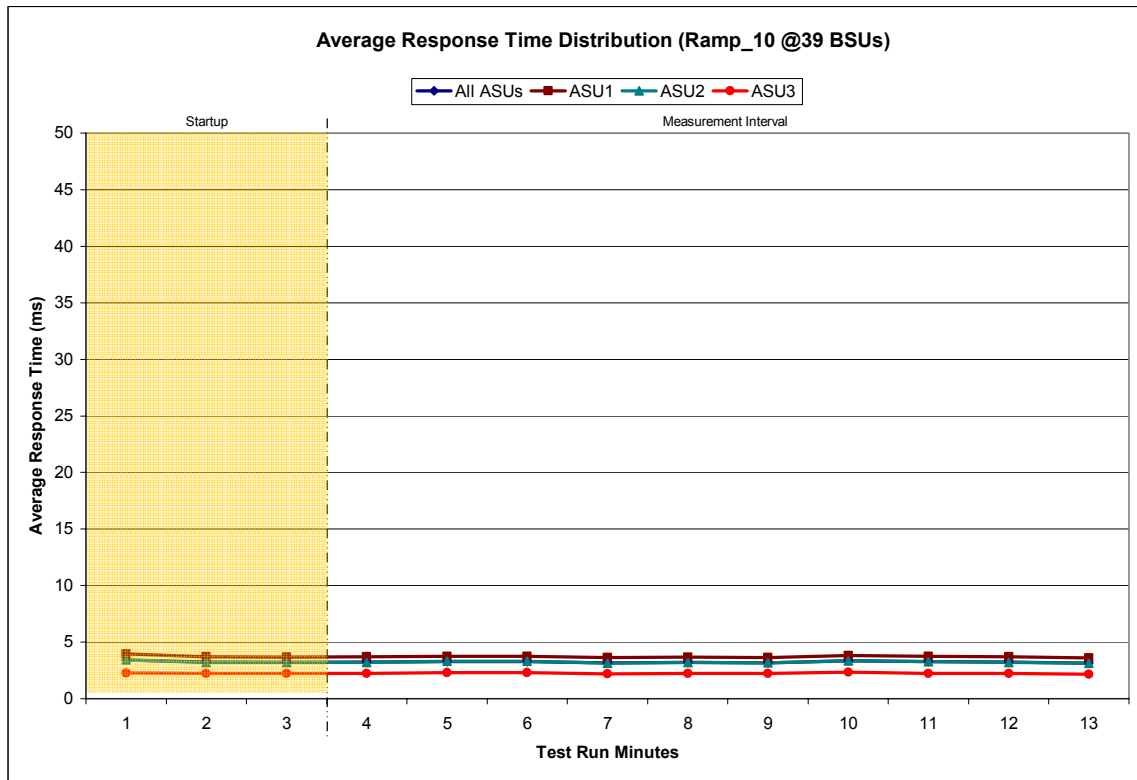

SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<i>IM</i>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<i>MIM</i>	0.0350	0.2810	0.0700	0.2103	0.0179	0.0698	0.0349	0.2810
<i>COV</i>	0.011	0.005	0.012	0.008	0.028	0.007	0.014	0.003

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Repeatability Test

Clause 5.4.3

The Repeatability Test demonstrates the repeatability and reproducibility of the SPC-1 IOPS™ and SPC-1 LRT™ primary metrics generated in earlier Test Runs.

There are two identical Repeatability Test Phases. Each Test Phase contains two Test Runs. Each of the Test Runs will have a Measurement Interval of no less than ten (10) minutes. The two Test Runs in each Test Phase will be executed without interruption or any type of manual intervention.

The first Test Run in each Test Phase is executed at the 10% load point. The Average Response Time from each of the Test Runs is compared to the SPC-1 LRT™ primary metric. Each Average Response Time value must be less than the SPC-1 LRT™ primary metric plus 5%.

The second Test Run in each Test Phase is executed at the 100% load point. The I/O Request Throughput from the Test Runs is compared to the SPC-1 IOPS™ primary metric. Each I/O Request Throughput value must be greater than the SPC-1 IOPS™ primary metric minus 5%. In addition, the Average Response Time for each Test Run cannot exceed 30 milliseconds.

If any of the above constraints are not met, the benchmark measurement is invalid.

Clause 9.2.4.7.3

The following content shall appear in the FDR for each Test Run in the two Repeatability Test Phases:

- 1. A table containing the results of the two Repeatability Test Phases. The content, appearance, and format of the table are specified in Table 9-11.*
- 2. An I/O Request Throughput Distribution (data and graph).*
- 3. An Average Response Time Distribution (data and graph).*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Repeatability Test Runs are documented in “Appendix D: SPC-1 Workload Generator Input Parameters” on Page 62.

Repeatability Test Results File

The values for the SPC-1 IOPS™, SPC-1 LRT™, and the Repeatability Test measurements are listed below.

	SPC-1 IOPS™	SPC-1 LRT™
Primary Metrics	19,496.00	3.23
Repeatability Test Phase 1	19,493.80	3.28
Repeatability Test Phase 2	19,502.23	3.27

A link to the test result file generated from each Repeatability Test Run list is listed below.

[Repeatability Test Phase 1, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 1, Test Run 2 \(IOPS\)](#)


[Repeatability Test Phase 2, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 2, Test Run 2 \(IOPS\)](#)

Repeatability 1 LRT – I/O Request Throughput Distribution Data

39 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:22:06	23:25:06	0-2	0:03:00
<i>Measurement Interval</i>	23:25:06	23:35:06	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	1,948.07	1,159.08	240.20	548.78
1	1,954.52	1,163.62	238.48	552.42
2	1,951.97	1,163.48	236.70	551.78
3	1,948.13	1,159.68	240.52	547.93
4	1,946.83	1,160.45	238.32	548.07
5	1,952.90	1,162.30	237.85	552.75
6	1,955.02	1,162.13	241.57	551.32
7	1,945.12	1,158.20	239.70	547.22
8	1,945.63	1,158.02	238.78	548.83
9	1,944.47	1,157.43	239.78	547.25
10	1,957.93	1,168.00	237.72	552.22
11	1,947.50	1,163.15	240.40	543.95
12	1,940.92	1,156.23	239.43	545.25
Average	1,948.45	1,160.56	239.41	548.48

Repeatability 1 LRT – I/O Request Throughput Distribution Graph

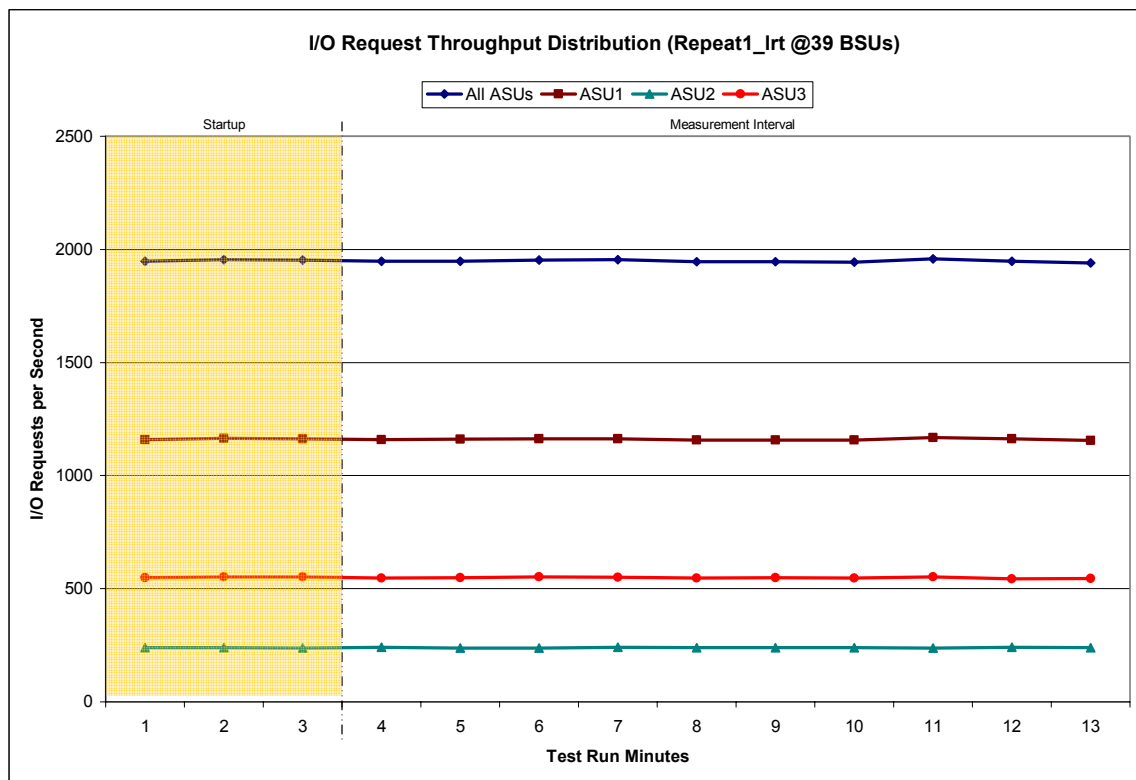


Repeatability 1 LRT –Average Response Time (ms) Distribution Data

39 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:22:06	23:25:06	0-2	0:03:00
<i>Measurement Interval</i>	23:25:06	23:35:06	3-12	0:10:00

60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	3.33	3.81	3.35	2.32
1	3.30	3.77	3.29	2.34
2	3.24	3.68	3.26	2.29
3	3.17	3.61	3.19	2.21
4	3.47	3.93	3.50	2.46
5	3.35	3.80	3.35	2.41
6	3.31	3.78	3.32	2.31
7	3.30	3.78	3.28	2.31
8	3.17	3.64	3.22	2.17
9	3.19	3.65	3.20	2.21
10	3.26	3.73	3.27	2.27
11	3.32	3.78	3.33	2.32
12	3.23	3.69	3.27	2.25
Average	3.28	3.74	3.29	2.29


Repeatability 1 LRT –Average Response Time (ms) Distribution Graph

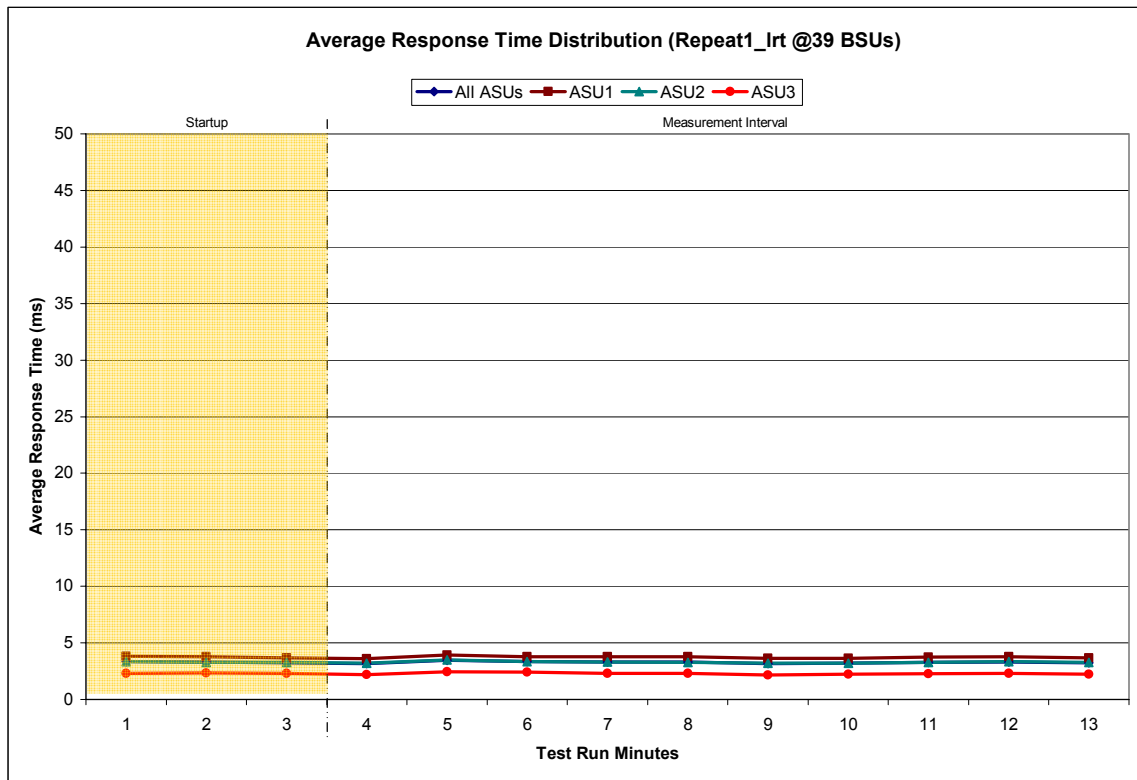

Repeatability 1 IOPS – I/O Request Throughput Distribution Data

390 BSUs				
	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:35:16	23:38:17	0-2	0:03:01
<i>Measurement Interval</i>	23:38:17	23:48:17	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	19,501.82	11,618.55	2,398.05	5,485.22
1	19,502.02	11,636.25	2,395.32	5,470.45
2	19,496.00	11,626.67	2,391.32	5,478.02
3	19,530.42	11,631.42	2,399.32	5,499.68
4	19,496.83	11,613.67	2,394.97	5,488.20
5	19,487.52	11,605.88	2,404.37	5,477.27
6	19,485.92	11,615.52	2,397.92	5,472.48
7	19,497.17	11,605.10	2,400.95	5,491.12
8	19,493.92	11,617.55	2,394.52	5,481.85
9	19,509.78	11,608.88	2,400.80	5,500.10
10	19,488.68	11,606.38	2,406.02	5,476.28
11	19,487.68	11,625.60	2,392.93	5,469.15
12	19,460.07	11,606.28	2,393.53	5,460.25
Average	19,493.80	11,613.63	2,398.53	5,481.64


Repeatability 1 IOPS – I/O Request Throughput Distribution Graph

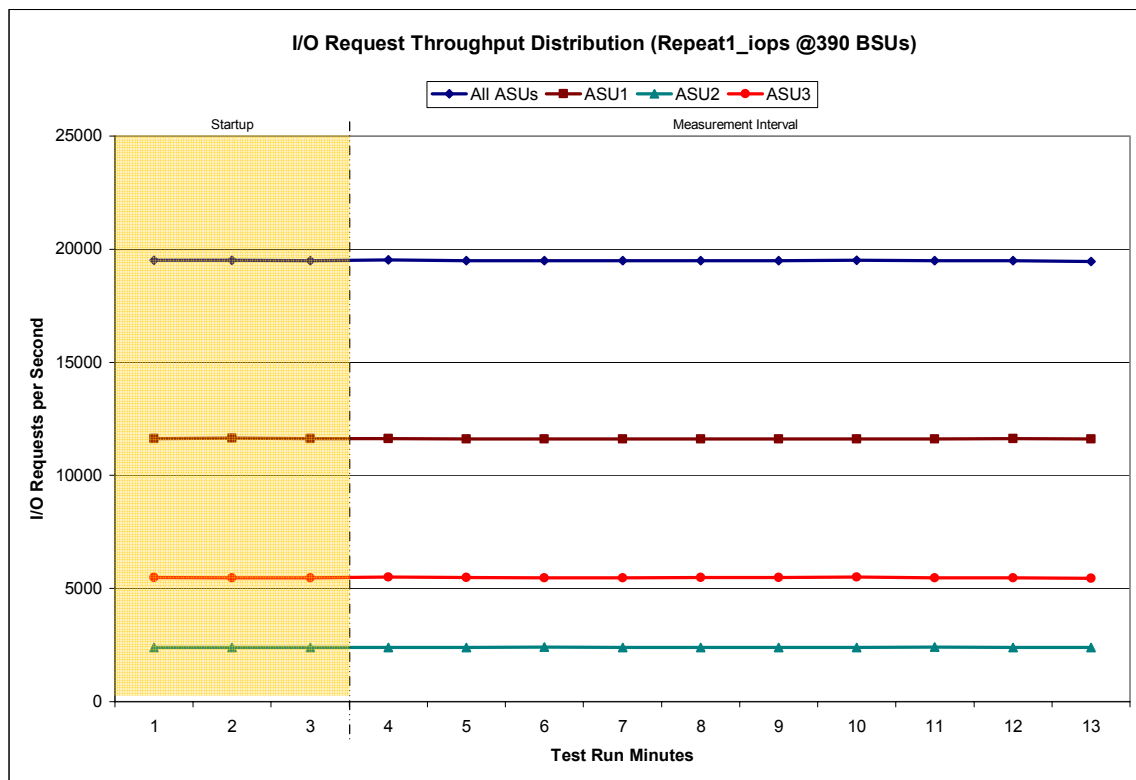

Repeatability 1 IOPS –Average Response Time (ms) Distribution Data

390 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:35:16	23:38:17	0-2	0:03:01
<i>Measurement Interval</i>	23:38:17	23:48:17	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	27.00	26.24	26.18	28.96
1	28.59	27.69	27.75	30.86
2	30.21	29.30	29.26	32.55
3	30.96	30.05	30.12	33.26
4	30.09	29.18	29.33	32.35
5	28.37	27.56	27.60	30.43
6	27.28	26.41	26.58	29.43
7	29.33	28.42	28.54	31.59
8	30.34	29.38	29.69	32.67
9	30.68	29.83	30.10	32.74
10	29.30	28.48	28.48	31.37
11	27.02	26.30	26.35	28.85
12	29.54	28.68	28.90	31.65
Average	29.29	28.43	28.57	31.43


Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph

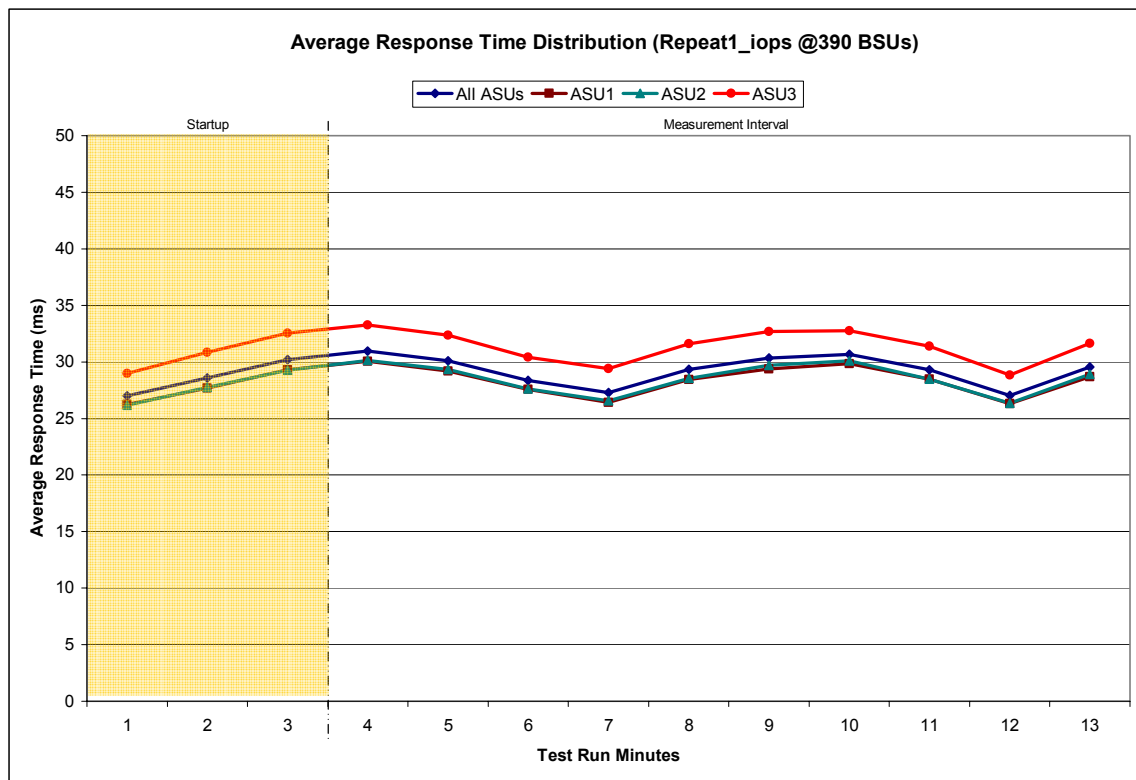

Repeatability 2 LRT – I/O Request Throughput Distribution Data

39 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:48:30	23:51:30	0-2	0:03:00
<i>Measurement Interval</i>	23:51:30	0:01:30	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	1,945.63	1,166.12	237.52	542.00
1	1,954.60	1,166.57	240.30	547.73
2	1,957.50	1,171.28	238.67	547.55
3	1,950.25	1,160.30	239.60	550.35
4	1,949.92	1,162.73	239.10	548.08
5	1,950.68	1,159.50	242.28	548.90
6	1,952.48	1,161.60	241.58	549.30
7	1,955.42	1,163.88	239.33	552.20
8	1,949.45	1,161.45	237.43	550.57
9	1,945.07	1,156.80	240.42	547.85
10	1,950.83	1,159.45	237.17	554.22
11	1,947.37	1,164.73	238.48	544.15
12	1,949.30	1,161.78	239.58	547.93
Average	1,950.08	1,161.22	239.50	549.36


Repeatability 2 LRT – I/O Request Throughput Distribution Graph

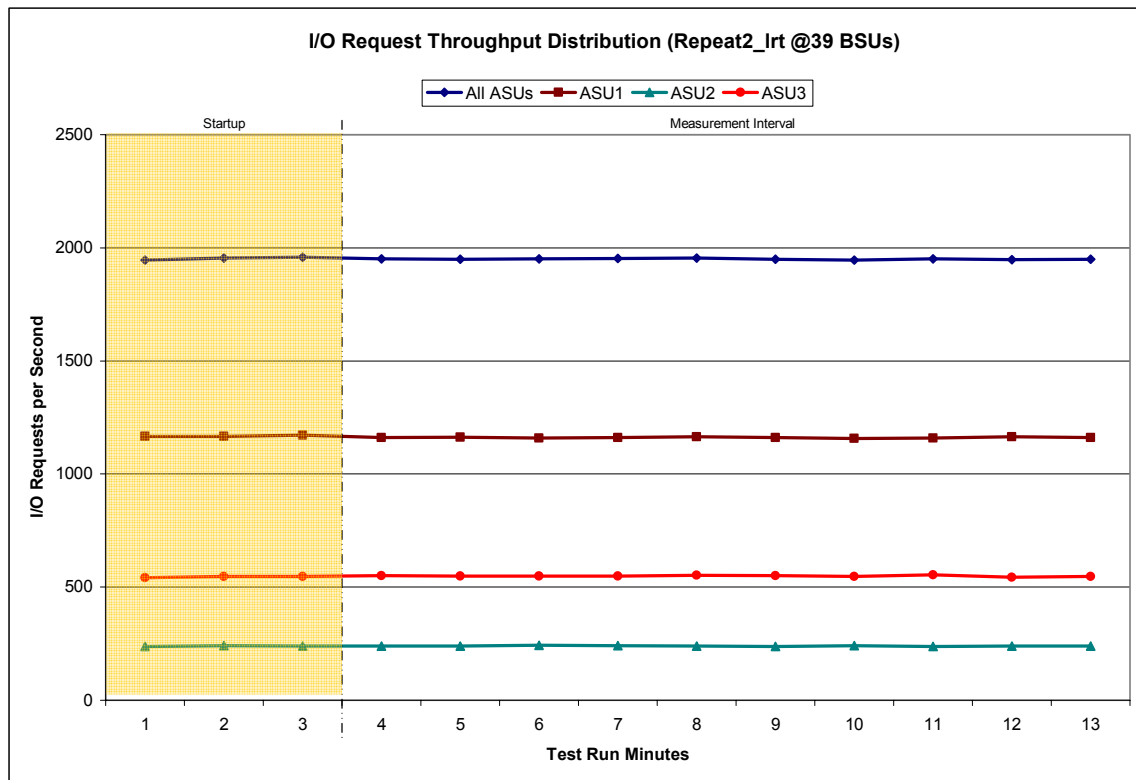

Repeatability 2 LRT –Average Response Time (ms) Distribution Data

39 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:48:30	23:51:30	0-2	0:03:00
<i>Measurement Interval</i>	23:51:30	0:01:30	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	3.39	3.90	3.32	2.33
1	3.29	3.76	3.29	2.28
2	3.21	3.67	3.19	2.22
3	3.23	3.71	3.23	2.23
4	3.36	3.83	3.30	2.40
5	3.32	3.79	3.32	2.34
6	3.26	3.73	3.23	2.29
7	3.19	3.67	3.18	2.20
8	3.24	3.72	3.23	2.24
9	3.30	3.75	3.32	2.35
10	3.35	3.82	3.38	2.33
11	3.24	3.70	3.24	2.24
12	3.25	3.72	3.26	2.25
Average	3.27	3.74	3.27	2.29


Repeatability 2 LRT –Average Response Time (ms) Distribution Graph

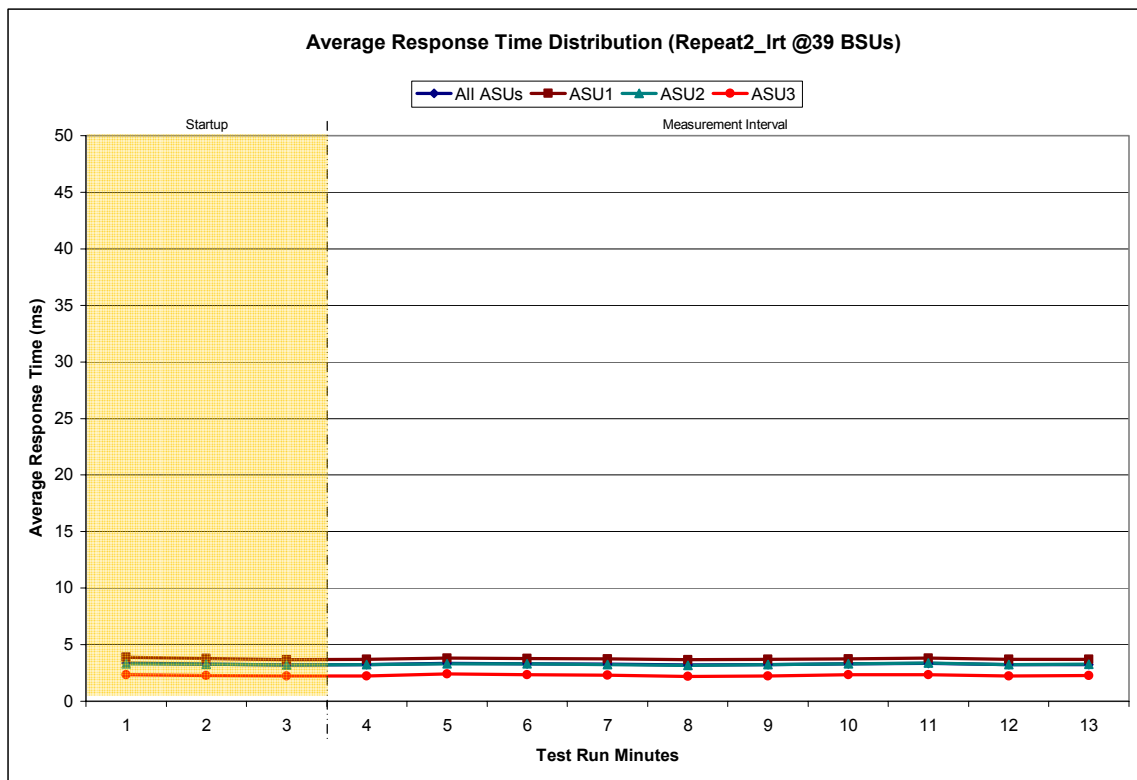

Repeatability 2 IOPS – I/O Request Throughput Distribution Data

390 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	0:01:40	0:04:41	0-2	0:03:01
<i>Measurement Interval</i>	0:04:41	0:14:41	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	19,520.73	11,627.67	2,402.02	5,491.05
1	19,507.87	11,612.53	2,397.23	5,498.10
2	19,488.65	11,623.67	2,394.33	5,470.65
3	19,495.32	11,611.90	2,396.37	5,487.05
4	19,494.13	11,609.78	2,407.00	5,477.35
5	19,507.30	11,629.00	2,391.37	5,486.93
6	19,530.52	11,648.43	2,397.83	5,484.25
7	19,513.68	11,629.03	2,395.65	5,489.00
8	19,505.12	11,641.60	2,392.13	5,471.38
9	19,513.65	11,627.57	2,399.58	5,486.50
10	19,498.80	11,620.07	2,405.05	5,473.68
11	19,493.95	11,617.62	2,400.82	5,475.52
12	19,469.87	11,614.08	2,386.42	5,469.37
Average	19,502.23	11,624.91	2,397.22	5,480.10


Repeatability 2 IOPS – I/O Request Throughput Distribution Graph

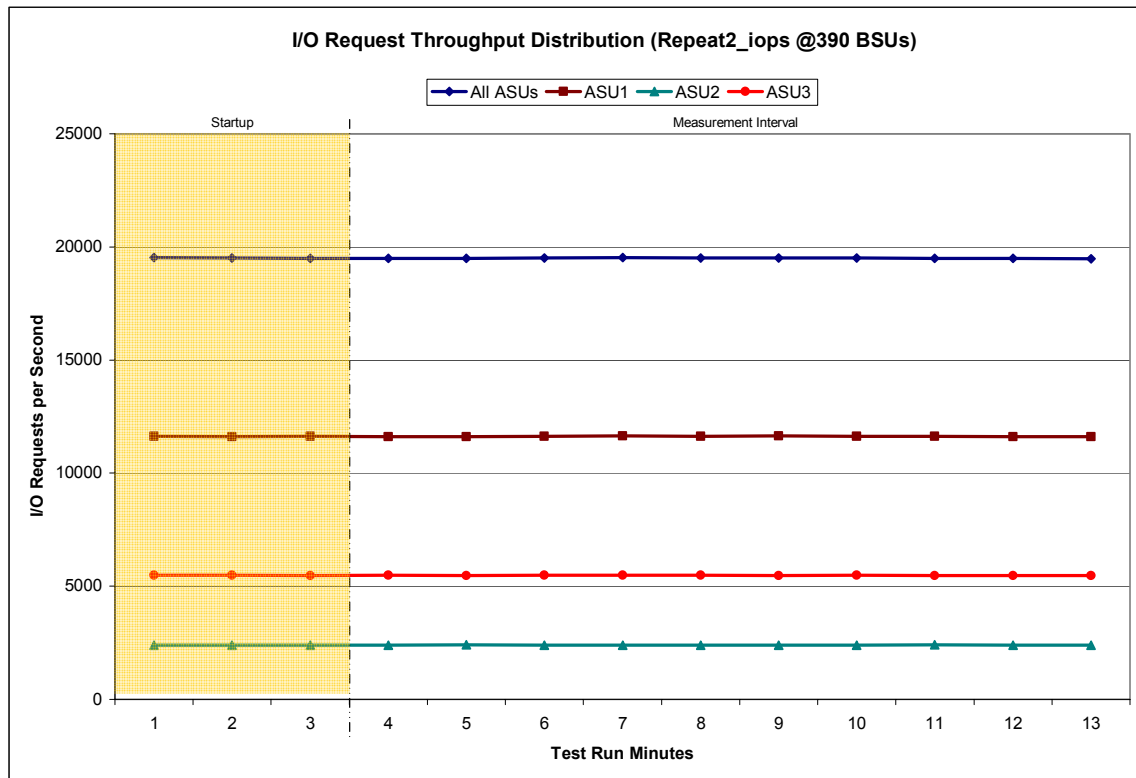

Repeatability 2 IOPS –Average Response Time (ms) Distribution Data

390 BSUs		Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>		0:01:40	0:04:41	0-2	0:03:01
<i>Measurement Interval</i>		0:04:41	0:14:41	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3	
0	27.03	26.27	26.36	28.92	
1	30.93	30.03	30.13	33.17	
2	30.12	29.21	29.40	32.34	
3	29.41	28.52	28.63	31.62	
4	27.25	26.44	26.58	29.27	
5	27.05	26.23	26.36	29.09	
6	30.24	29.27	29.29	32.70	
7	30.40	29.52	29.63	32.60	
8	30.38	29.55	29.85	32.36	
9	26.99	26.25	26.32	28.83	
10	27.66	27.00	26.87	29.40	
11	29.61	28.85	28.95	31.49	
12	29.24	28.47	28.44	31.23	
Average	28.82	28.01	28.09	30.86	

Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph

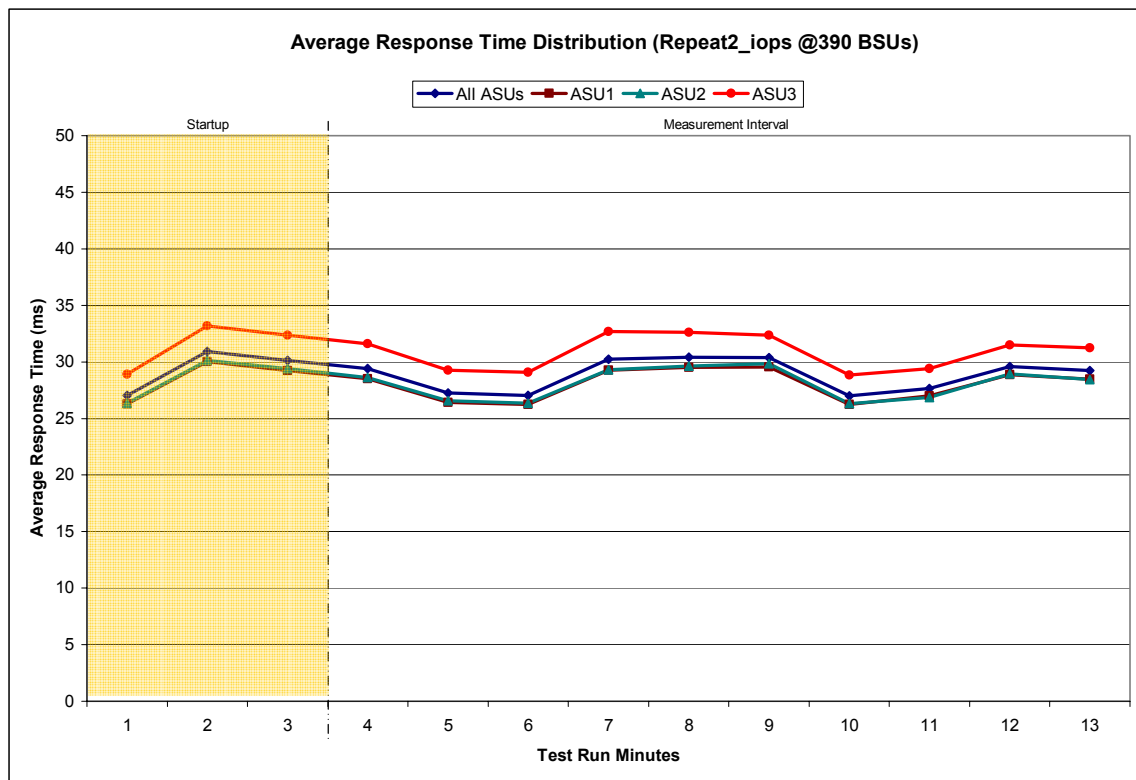

Repeatability 1 (LRT)

Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0351	0.2812	0.0697	0.2096	0.0180	0.0699	0.0351	0.2815
COV	0.014	0.004	0.008	0.004	0.022	0.011	0.019	0.003

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Repeatability 1 (IOPS)

Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0351	0.2808	0.0701	0.2098	0.0180	0.0700	0.0351	0.2812
COV	0.003	0.001	0.003	0.002	0.006	0.003	0.003	0.002

Repeatability 2 (LRT)

Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0348	0.2809	0.0697	0.2101	0.0180	0.0698	0.0350	0.2817
COV	0.017	0.003	0.014	0.007	0.018	0.009	0.012	0.004

Repeatability 2 (IOPS)

Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0351	0.2810	0.0699	0.2100	0.0180	0.0698	0.0351	0.2810
COV	0.003	0.001	0.003	0.002	0.005	0.004	0.007	0.001

Data Persistence Test

Clause 6

The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

The SPC-1 Workload Generator will write 16 block I/O requests at random over the total Addressable Storage Capacity of the TSC for ten (10) minutes at a minimum of 25% of the load used to generate the SPC-1 IOP™ primary metric. The bit pattern selected to be written to each block as well as the address of the block will be retained in a log file.

The Benchmark Configuration will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.

The SPC-1 Workload Generator will then use the above log file to verify each block written contains the correct bit pattern.

Clause 9.2.4.8

The following content shall appear in this section of the FDR:

1. *A listing or screen image of all input parameters supplied to the Workload Generator.*
2. *For the successful Data Persistence Test Run, a table illustrating key results. The content, appearance, and format of this table are specified in Table 9-12. Information displayed in this table shall be obtained from the Test Run Results File referenced below in #3.*
3. *For the successful Data Persistence Test Run, the human readable Test Run Results File produced by the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Persistence Test Run 1 is listed below and the input parameters for Persistence Test Run 2 is documented in “Appendix D: SPC-1 Workload Generator Input Parameters” on Page 62.

java -Xmx512m persist1 -b 390

Data Persistence Test Results File

A link to each test result file generated from each Data Persistence Test is listed below.

[Persistence 1 Test Results File](#)

[Persistence 2 Test Results File](#)

Data Persistence Test Results

Data Persistence Test Results	
Data Persistence Test Run Number: 1	
Total Number of Logical Blocks Written	46,537,456
Total Number of Logical Blocks Verified	39,719,440
Total Number of Logical Blocks that Failed Verification	0
Time Duration for Writing Test Logical Blocks	10 minutes
Size in Bytes of each Logical Block	512
Number of Failed I/O Requests in the process of the Test	0

In some cases the same address was the target of multiple writes, which resulted in more Logical Blocks Written than Logical Blocks Verified. In the case of multiple writes to the same address, the pattern written and verified must be associated with the last write to that address.

PRICED STORAGE CONFIGURATION AVAILABILITY DATE

Clause 9.2.4.9

The committed delivery data for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date must be the date at which all components are committed to be available.

The FDR shall state: "The Priced Storage Configuration, as documented in this Full Disclosure Report will be available for shipment to customers on MMMM DD, YYYY." Where Priced Storage Configuration is the TSC Configuration Name as described in Clause 9.2.4.3.3 and MMMM is the alphanumeric month, DD is the numeric day, and YYYY is the numeric year of the date that the Priced Storage Configuration, as documented, is available for shipment to customers as described above.

The Sun StorEdge™ 6920 (8 tray), as documented in this Full Disclosure Report became available for customer purchase and shipment on July 23, 2004.

PRICING INFORMATION

Clause 9.2.4.11

A statement of the respective calculations for pricing must be included.

Pricing information may found in the Tested Storage Configuration Pricing section on page 12.

ANOMALIES OR IRREGULARITIES

Clause 9.2.4.10

The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-1 benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in this FDR.

There were no anomalies or irregularities encountered during the SPC-1 Onsite Audit of the Sun StorEdge™ 6920 (8 tray).

APPENDIX A: CUSTOMER TUNABLE PARAMETERS AND OPTIONS

The following settings were made in the Solaris “/etc/system” control file information for execution of the SPC-1 Workload Generator on the SunFire 6800:

```
spc@bigdog:/spc/spc1 $ cat /etc/system
*ident "@(#)system 1.18 97/06/27 SMI" /* SVR4 1.5 */
*
* SYSTEM SPECIFICATION FILE
*
* moddir:
*
* Set the search path for modules. This has a format similar to the
* csh path variable. If the module isn't found in the first directory
* it tries the second and so on. The default is /kernel /usr/kernel
*
* Example:
*     moddir: /kernel /usr/kernel /other/modules
*
* root device and root filesystem configuration:
*
* The following may be used to override the defaults provided by
* the boot program:
*
* rootfs:      Set the filesystem type of the root.
*
* rootdev:     Set the root device. This should be a fully
*              expanded physical pathname. The default is the
*              physical pathname of the device where the boot
*              program resides. The physical pathname is
*              highly platform and configuration dependent.
*
* Example:
*     rootfs:ufs
*     rootdev:/sbus@1,f8000000/esp@0,800000/sd@3,0:a
*
* (Swap device configuration should be specified in /etc/vfstab.)
*
* exclude:
*
* Modules appearing in the moddir path which are NOT to be loaded,
* even if referenced. Note that `exclude' accepts either a module
* name,
* or a filename which includes the directory.
*
* Examples:
*     exclude: win
*     exclude: sys/shmsys
*
* forceload:
*
* Cause these modules to be loaded at boot time, (just before mounting
* the root filesystem) rather than at first reference. Note that
* forceload expects a filename which includes the directory. Also
```

```
* note that loading a module does not necessarily imply that it will
* be installed.
*
* Example:
*     forcload: drv/foo

* set:
*
* Set an integer variable in the kernel or a module to a new value.
* This facility should be used with caution. See system(4).
*
* Examples:
*
* To set variables in 'unix':
*
*     set nautopush=32
*     set maxusers=40
*
* To set a variable named 'debug' in the module named 'test_module'
*
*     set test_module:debug = 0x13

* ITOps add
set noexec_user_stack = 1
set noexec_user_stack_log = 1
* end ITOps add
*** IPC semaphores
set semsys:seminfo_semmmap=4096
set semsys:seminfo_semmni=4096
set semsys:seminfo_semmns=4096
set semsys:seminfo_semmnu=4096
set semsys:seminfo_semume=64
set semsys:seminfo_semmsl=256

* IPC messages
set msgsys:msginfo_msgmap=4096
set msgsys:msginfo_msgmni=4096
set msgsys:msginfo_msgssz=64
set msgsys:msginfo_msgtql=40000

* pt_cnt : pseudo terminals are allocated dynamically
* set hard limit on file descriptors
* set rlim_fd_max = 8192
* set soft limit on file descriptors
set rlim_fd_cur = 1024

* buffer high water mark: limits the amount of RAM devoted to headers cache.
set bufhwm = 8000

* increase capability to do 1Mb IOs to *raw* devices, 32MB max.
*set maxphys = 1048576
set maxphys = 4194304

* Memory allocation parameters
set vxio:voliomem_chunk_size = 1048576
set vxio:voliomem_maxpool_sz = 134217728
* I/O related parameters
set vxio:vol_default_iodelay = 10
set vxio:vol_maxkiocount = 32768
set vxio:vol_maxioctl = 131072
```

```
set vxio:vol_maxio = 8192
set vxio:vol_maxspecialio = 10240
* VM related
* scanner I/Os per second page-outs.(default 65536 for E10000)
* set maxpgio = 16384
* # of pages the scanned when freelist falls below lotsfree.
* set to 1/16 to 1/4 RAM up to 1Gb/sec (131072) *set fastscan = 65536 **Fri Mar 31 16:07:32 PST 2000
* R. McDougall: increase maxpgio to prevent the scanner from limiting writes set maxpgio = 65536
* R. McDougall: increase fastscan to limit the effect the page scanner
* has on file system throughput
set fastscan = 65536
```

```
* UFS related
* filesystem write throttling high/low watermark
* R. McDougall: set the write throttle higher for large systems > 1GB of RAM
*
```

```
set ufs:ufs_HW = 20971520
set ufs:ufs_LW = 15728640
```

```
* cool fsflushr on big memory machines set autoup = 1024 set tune_t_fsflushr = 1
```

```
* TCP related
* decrease potential connection backlog by:
* 1. increase connection hash table size, increase if connections are high.
set tcp:tcp_conn_hash_size = 32768
* 2. depth of destination queue (# of messages outbound streams can hold)
* NOTE: sq_max_size = 0 is unlimited, but uses more kernel memory.
set sq_max_size = 100
```

APPENDIX B: TESTED STORAGE CONFIGURATION (TSC) CREATION

The following steps document the operations necessary to configure and access the SPC-1 Tested Storage Configuration (TSC) for the Sun StorEdge 9620 system.

- Access the storage interface
- Create a Secure Virtual Storage Domain (SVSD)
- Create virtual pools and Vdisks using the MailSpooling profile
- Create virtual volumes from the pools
- Map the volumes to the initiators (Host System HBAs)

Each of the above steps is described in further detail below.

Access the storage interface

The Web-UI is a browser based interface that manages the Storage Service Processor. To start the Web-UI, open a browser and enter the following URL: https://SP_WAN_IPADDRESS:6789. A username and password will be required to access the Web-UI.

Create a Secure Virtual Storage Domain (SVSD)

From the Web-UI Console Window select the *SE6920 Configuration Service* link. Use the Storage Domains link to display the Storage Domain Summary window. To begin creating a new SVSD click on the “New” link. In the New Storage Domain window enter **spc** as the name (*description is always optional*) Select all the initiators displayed, which will finish creating the SVSD.

Create virtual pools and Vdisks using the MailSpooling profile

Create virtual volumes from the pools

Map the volumes to the initiators (Host System HBAs)

The last three steps are completed using the script listed below. The script must be created on the service processor at `/opt/se6x20/cli/bin`. The command `/opt/se6x20/cli/bin/ssce login -u storage -f -h localhost` is used to login to the CLI interface of the StorEdge 6920. A password will be required for the login. The script can then be executed from the CLI interface, which will create the virtual volumes and map them to the HBAs. That process will be approximately ten hours in duration.

```
#!/sbin/sh
#
# Copyright (c) 2001 by Sun Microsystems, Inc.
# All rights reserved.
#
##
PATH=/opt/se6x20/cli/bin:$PATH
set -x
#
```

```
# UnMap volumes
#
#STARTTIME=`date`
#for init in `sscs list initiator | awk '{print $2}'| sort`
#do
#   for vol in `sscs list volume | awk '{print $2}'`
#   do
#   echo "UnMapping Volume $vol from $init..."
#   sscs unmap -S spc -i $init volume $vol
#   done
##
##
## Delete volumes
##
##
##for vol in `sscs list volume | awk '{print $2}'`
##do
##   echo "Deleteing Volume $vol ..."
##   sscs delete -S spc volume $vol
##
##done
##echo "Start time = $STARTTIME"
##date
#####
## Remove Vdisk
##
##sscs delete -S spc -p pool-1 vdisk disk/3/2/1/0/0
##sscs delete -S spc -p pool-1 vdisk disk/3/8/1/0/0
##sscs delete -S spc -p pool-1 vdisk disk/3/4/1/0/0
##sscs delete -S spc -p pool-1 vdisk disk/3/5/1/0/0
##
##sscs delete -S spc -p pool-2 vdisk disk/4/2/2/1/0
##sscs delete -S spc -p pool-2 vdisk disk/4/8/2/1/0
##sscs delete -S spc -p pool-2 vdisk disk/4/4/2/1/0
##sscs delete -S spc -p pool-2 vdisk disk/4/5/2/1/0
####
##sscs delete -S spc -p pool-3 vdisk disk/3/2/1/2/0
##sscs delete -S spc -p pool-3 vdisk disk/3/8/1/2/0
##sscs delete -S spc -p pool-3 vdisk disk/3/4/1/2/0
##sscs delete -S spc -p pool-3 vdisk disk/3/5/1/2/0
####
##sscs delete -S spc -p pool-4 vdisk disk/4/2/2/3/0
##sscs delete -S spc -p pool-4 vdisk disk/4/8/2/3/0
##sscs delete -S spc -p pool-4 vdisk disk/4/4/2/3/0
##sscs delete -S spc -p pool-4 vdisk disk/4/5/2/3/0
#####
# Remove Storage pools
#
#sscs delete -S spc pool pool-1
#sscs delete -S spc pool pool-2
#sscs delete -S spc pool pool-3
#sscs delete -S spc pool pool-4
#
#####
#####
```

```
# Create Storage pools
#
sscs create -p MailSpooling -S spc -d pool-1 pool pool-1
sscs create -p MailSpooling -S spc -d pool-2 pool pool-2
sscs create -p MailSpooling -S spc -d pool-3 pool pool-3
sscs create -p MailSpooling -S spc -d pool-4 pool pool-4
#
#
#
#
#
#
#
#
#####
# Create Vdisks in all pools
#
sscs create -p pool-1 -t 0 -a array00 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-1 -t 0 -a array01 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-1 -t 0 -a array02 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-1 -t 0 -a array03 -S spc -d 7 vdisk
sleep 120
#
sscs create -p pool-2 -t 1 -a array00 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-2 -t 1 -a array01 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-2 -t 1 -a array02 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-2 -t 1 -a array03 -S spc -d 7 vdisk
sleep 120

sscs create -p pool-3 -t 0 -a array00 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-3 -t 0 -a array01 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-3 -t 0 -a array02 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-3 -t 0 -a array03 -S spc -d 7 vdisk
sleep 120
###
sscs create -p pool-4 -t 1 -a array00 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-4 -t 1 -a array01 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-4 -t 1 -a array02 -S spc -d 7 vdisk
sleep 120
sscs create -p pool-4 -t 1 -a array03 -S spc -d 7 vdisk
sleep 120
##
##
```

```
echo Verifying all vdisks are created
Vdisk=`sscs list -S spc vdisk | wc -l`
while (test "$Vdisk" -lt "16")
do
    sscs list -S spc vdisk
    sleep 180
Vdisk=`sscs list -S spc vdisk | wc -l`
done
echo Lets move on
#
#
#
#
#
#
#
#####
# Create ASU3 volumes on all pools
echo Creating asu3 volumes on pool-1
pool=1
while (test "$pool" -lt "5")
do
    counter=1
    while (test "$counter" -lt "5")
    do
        echo Creating asu3 volumes on pool-$pool
        sscs create -p pool-$pool -s 8g -S spc -t volume p$pool-asu3-s$counter
        sleep 10
        counter=`expr $counter + 1`
    done
    pool=`expr $pool + 1`
done
#####

#
# Create ASU1 volumes on all pools
date
pool=1
while (test "$pool" -lt "5")
do
    echo Creating asu1 volumes on pool-$pool
    counter=1
    while (test "$counter" -lt "6")
    do
        echo Creating asu1 volumes on pool-$pool
        sscs create -p pool-$pool -s 28g -S spc -t volume p$pool-asu1-s$counter
        counter=`expr $counter + 1`
    done
    pool=`expr $pool + 1`
done

#####

# Create ASU2 volumes
```

```
date
pool=1
while (test "$pool" -lt "5")
do
echo Creating asu2 volumes on pool-$pool
counter=1
while (test "$counter" -lt "4")
do
    echo Creating asu2 volumes on pool-$pool
    sscs create -p pool-$pool -s 46g -S spc -t volume p$pool-asu2-s$counter
    counter=`expr $counter + 1`
done
pool=`expr $pool + 1`
done
#####
# Map volumes ASU3
#####
# POOL-1
counter=1
while (test "$counter" -lt "5")
do
target=`expr $counter + 0`
    echo Mapping p1-asu3-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p1-asu3-s$counter -P readwrite -l $target initiator $init
        echo Mapping $init
    done
    counter=`expr $counter + 1`
done
#####
#Pool-2
counter=1
while (test "$counter" -lt "5")
do
target=`expr $counter + 4`
    echo Mapping p2-asu3-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p2-asu3-s$counter -P readwrite -l $target initiator $init
        echo Mapping $init
    done
    counter=`expr $counter + 1`
done
#####
#Pool-3
date
counter=1
while (test "$counter" -lt "5")
do
target=`expr $counter + 8`
    echo Mapping p3-asu3-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p3-asu3-s$counter -P readwrite -l $target initiator $init
```



```
        echo Mapping $init
        done
    counter=`expr $counter + 1`
done
#####
#
#
#
#
#
#
#Pool-4
#
counter=1
while (test "$counter" -lt "5")
do
target=`expr $counter + 12`
    echo Mapping p4-asu3-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p4-asu3-s$counter -P readwrite -l $target initiator $init
        echo Mapping $init
    done
    counter=`expr $counter + 1`
done
#####
# Map asu1
#####
#Pool-1
counter=1
while (test "$counter" -lt "6")
do
target=`expr $counter + 16`
    echo Mapping p1-asu1-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p1-asu1-s$counter -P readwrite -l $target initiator $init
        echo Mapping $init
    done

    counter=`expr $counter + 1`
done
#####
#Pool-2
counter=1
while (test "$counter" -lt "6")
do
target=`expr $counter + 21`
    echo Mapping p2-asu1-s$counter to all Initiators
    for init in `sscs list initiator | awk '{print $2}'| sort`
    do
        sscs map -S spc -v p2-asu1-s$counter -P readwrite -l $target initiator $init
        echo Mapping $init
    done
```

```
    counter=`expr $counter + 1`  
done  
#####  
#####  
#  
#  
#  
#  
#  
#  
#Pool-3  
#  
date  
counter=1  
while (test "$counter" -lt "6")  
do  
target=`expr $counter + 26`  
    echo Mapping p3-asu1-s$counter to all Initiators  
for init in `sscs list initiator | awk '{print $2}' | sort`  
do  
    sscs map -S spc -v p3-asu1-s$counter -P readwrite -l $target initiator $init  
    echo Mapping $init  
done  
  
    counter=`expr $counter + 1`  
done  
#####  
#Pool-4  
#  
counter=1  
while (test "$counter" -lt "6")  
do  
target=`expr $counter + 31`  
    echo Mapping p4-asu1-s$counter to all Initiators  
for init in `sscs list initiator | awk '{print $2}' | sort`  
do  
    sscs map -S spc -v p4-asu1-s$counter -P readwrite -l $target initiator $init  
    echo Mapping $init  
done  
  
    counter=`expr $counter + 1`  
done  
#####  
# Map asu2  
#####  
#Pool-1  
#  
#  
counter=1  
while (test "$counter" -lt "4")  
do  
target=`expr $counter + 36`  
    echo Mapping p1-asu2-s$counter to all Initiators  
for init in `sscs list initiator | awk '{print $2}' | sort`  
do  
    sscs map -S spc -v p1-asu2-s$counter -P readwrite -l $target initiator $init
```

```
        echo Mapping $init
        done
    counter=`expr $counter + 1`
done
#####
#
#
#
#Pool-2
#
counter=1
while (test "$counter" -lt "4")
do
target=`expr $counter + 39`
    echo Mapping p2-asu2-s$counter to all Initiators
for init in `sscs list initiator | awk '{print $2}' | sort`
do
    sscs map -S spc -v p2-asu2-s$counter -P readwrite -l $target initiator $init
    echo Mapping $init
done
    counter=`expr $counter + 1`
done
#####
#Pool-3
#
#
counter=1
while (test "$counter" -lt "4")
do
target=`expr $counter + 42`
    echo Mapping p3-asu2-s$counter to all Initiators
for init in `sscs list initiator | awk '{print $2}' | sort`
do
    sscs map -S spc -v p3-asu2-s$counter -P readwrite -l $target initiator $init
    echo Mapping $init
done
    counter=`expr $counter + 1`
done
#####
#Pool-4
#
counter=1
while (test "$counter" -lt "4")
do
target=`expr $counter + 45`
    echo Mapping p4-asu2-s$counter to all Initiators
for init in `sscs list initiator | awk '{print $2}' | sort`
do
    sscs map -S spc -v p4-asu2-s$counter -P readwrite -l $target initiator $init
    echo Mapping $init
done
    counter=`expr $counter + 1`
done
#####
```

```
echo $StartTime  
date
```

APPENDIX C: SPC-1 WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETERS

The contents of the SPC-1 Workload Generator command and parameter file is listed below.

```
sd=default  
sd=asu1_1,lun=/dev/md/rdisk/d1,size=550g  
sd=asu2_1,lun=/dev/md/rdisk/d2,size=550g  
sd=asu3_1,lun=/dev/md/rdisk/d3,size=122g
```

APPENDIX D: SPC-1 WORKLOAD GENERATOR INPUT PARAMETERS

The script used to execute Persistence Test Run 2, the Metrics Test (Sustainability, IOPS, and Response Time Ramp), and the Repeatability Test is listed below.

```
#!/usr/bin/ksh
bsu=390
STEP=1
startup=180
while [[ $bsu -le 390 ]]
do
outdir=/spc/nfs-spc/base-6920/domainA/${bsu}
mkdir -p $outdir
#iostat -xnzT d 60 60 > /tmp/6920-iostat.out &
java -Xmx512m persist2
mv persistence1 $outdir
mv persistence2 $outdir
metastat > $outdir/metastat
java -Xmx2048m -Xss1024k metrics -b $bsu -s $startup
mv metrics $outdir
java -Xmx2048m -Xss1024k repeat1 -b $bsu -s $startup
mv repeatability1 $outdir
java -Xmx2048m -Xss1024k repeat2 -b $bsu -s $startup
mv repeatability2 $outdir
mv SPCOut $outdir
#cp /tmp/6920-iostat.out $outdir
#zip -r money/${bsu}_vx_9980_dir_archive $outdir
bsu=`expr $bsu + $STEP`
echo "All done .... sleeping for 5 minutes"
sleep 300
done
```