



**SPC BENCHMARK 1™
FULL DISCLOSURE REPORT**

**IBM CORPORATION
IBM TOTALSTORAGE® DS4800**

SPC-1 V1.9

Submitted for Review: May 9, 2005

Submission Identifier: A00042

Accepted: July 8, 2006



First Edition – May 2005

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by IBM Corporation for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. IBM Corporation may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local IBM Corporation representative for information on products and services available in your area.

© Copyright IBM Corporation 2005. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

SPC Benchmark 1, SPC-1 IOPS, and SPC-1 LRT are trademarks of the Storage Performance Council. IBM and TotalStorage are registered trademarks of IBM Corporation in the United States and other countries. UNIX is a registered trademark of The Open Group in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

Notes

The following terms, used in this document, are defined as:

- Kilobyte (KB) is equal to 1,000 (10^3) bytes.
- Megabyte (MB) is equal to 1,000,000 (10^6) bytes.
- Gigabyte (GB) is equal to 1,000,000,000 (10^9) bytes.
- Terabyte (TB) is equal to 1,000,000,000,000 (10^{12}) bytes.
- A petabyte (PB) is equal to 1,000,000,000,000,000 (10^{15}) bytes.
- An exabyte (EB) is equal to 1,000,000,000,000,000,000 (10^{18}) bytes.

Table of Contents

Audit Certification.....	vi
Letter of Good Faith	ix
Executive Summary.....	10
Test Sponsor and Contact Information.....	10
Revision Information and Key Dates	10
Summary of Results	11
Storage Capacities and Relationships	11
Response Time - Throughput Curve	12
Response Time - Throughput Data.....	12
Tested Storage Configuration Pricing (<i>Priced Storage Configuration</i>)	13
Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration.....	13
Benchmark Configuration/Tested Storage Configuration Diagram.....	15
Configuration Information	16
Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram.	16
Storage Network Configuration	16
Host System Configuration.....	17
Customer Tunable Parameters and Options	17
Tested Storage Configuration (TSC) Description	17
SPC-1 Workload Generator Storage Configuration	18
Data Repository.....	19
Definitions.....	19
Storage Capacities and Relationships	20
SPC-1 Storage Capacities	20
SPC-1 Storage Hierarchy Ratios	20
SPC-1 Storage Capacities and Relationships Illustration.....	21
Logical Volume Capacity and ASU Mapping	21
SPC-1 Benchmark Execution Results.....	22
Definitions.....	22
Primary Metrics Test - Sustainability Test Phase	23
SPC-1 Workload Generator Input Parameters	23
Sustainability Test Results File	23
Sustainability - Data Rate Distribution Data (<i>MB/second</i>).....	24
Sustainability - Data Rate Distribution Graph	25
Sustainability - I/O Request Throughput Distribution Data.....	26
Sustainability - I/O Request Throughput Distribution Graph	27

Sustainability – Average Response Time (ms) Distribution Data	28
Sustainability – Average Response Time (ms) Distribution Graph	29
Sustainability – Response Time Frequency Distribution Data	30
Sustainability – Response Time Frequency Distribution Graph	30
Sustainability – Measured Intensity Multiplier and Coefficient of Variation.....	31
Primary Metrics Test – IOPS Test Phase	32
SPC-1 Workload Generator Input Parameters	32
IOPS Test Results File.....	32
IOPS Test Run – I/O Request Throughput Distribution Data	33
IOPS Test Run – I/O Request Throughput Distribution Graph.....	33
IOPS Test Run – Response Time Frequency Distribution Data	34
IOPS Test Run –Response Time Frequency Distribution Graph.....	34
IOPS Test Run – Average Response Time (ms) Distribution Data	35
IOPS Test Run – Average Response Time (ms) Distribution Graph	35
IOPS Test Run – I/O Request Information.....	36
IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation.....	36
Primary Metrics Test – Response Time Ramp Test Phase	37
SPC-1 Workload Generator Input Parameters	37
Response Time Ramp Test Results File.....	37
Response Time Ramp Distribution (IOPS) Data.....	38
Response Time Ramp Distribution (IOPS) Graph	39
SPC-1 LRT™ Average Response Time (ms) Distribution Data.....	40
SPC-1 LRT™ Average Response Time (ms) Distribution Graph	40
SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation	41
Repeatability Test.....	42
SPC-1 Workload Generator Input Parameters	42
Repeatability Test Results File	43
Repeatability 1 LRT – I/O Request Throughput Distribution Data.....	44
Repeatability 1 LRT – I/O Request Throughput Distribution Graph	44
Repeatability 1 LRT –Average Response Time (ms) Distribution Data	45
Repeatability 1 LRT –Average Response Time (ms) Distribution Graph.....	45
Repeatability 1 IOPS – I/O Request Throughput Distribution Data	46
Repeatability 1 IOPS – I/O Request Throughput Distribution Graph.....	46
Repeatability 1 IOPS –Average Response Time (ms) Distribution Data.....	47
Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph	47
Repeatability 2 LRT – I/O Request Throughput Distribution Data.....	48
Repeatability 2 LRT – I/O Request Throughput Distribution Graph	48
Repeatability 2 LRT –Average Response Time (ms) Distribution Data	49
Repeatability 2 LRT –Average Response Time (ms) Distribution Graph.....	49

Repeatability 2 IOPS – I/O Request Throughput Distribution Data	50
Repeatability 2 IOPS – I/O Request Throughput Distribution Graph.....	50
Repeatability 2 IOPS –Average Response Time (ms) Distribution Data.....	51
Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph	51
Repeatability 1 (LRT) Measured Intensity Multiplier and Coefficient of Variation.....	52
Repeatability 1 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	52
Repeatability 2 (LRT) Measured Intensity Multiplier and Coefficient of Variation	52
Repeatability 2 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	53
Data Persistence Test.....	54
SPC-1 Workload Generator Input Parameters	54
Data Persistence Test Results File	54
Data Persistence Test Results.....	55
Priced Storage Configuration Availability Date.....	56
Pricing Information.....	56
Anomalies or Irregularities	56
Appendix A: Customer Tunable Parameters and Options.....	57
Windows 2000 Registry Changes	57
Storage Array Cache Flush Settings.....	57
RDAC Failover Options.....	57
Host Bus Adapter Options.....	58
Appendix B: Tested Storage Configuration (TSC) Creation	59
SANtricity Volume Creation Script	60
Appendix C: SPC-1 Workload Generator Storage Commands and Parameters	63
Master Host System	63
Slave Host Systems	63

AUDIT CERTIFICATION



Bruce McNutt
 IBM Corporation
 KBV/9062-2
 9000 South Rita Road
 Tucson, AZ 85744

May 5, 2005

The SPC Benchmark 1™ results listed below for the IBM TotalStorage® DS4800 were produced in compliance with the SPC Benchmark 1™ V1.9 Remote Audit requirements.

SPC Benchmark 1™ V1.9 Results	
Tested Storage Configuration (TSC) Name: IBM TotalStorage® DS4800	
Metric	Reported Result
SPC-1 IOPS™	42,254.07
SPC-1 Price-Performance	\$17.55/SPC-1 IOPS™
Total ASU Capacity	6,871,109 GB
Data Protection Level	Mirroring
Total TSC Price (including three-year maintenance)	\$741,670

The following SPC Benchmark 1™ Remote Audit requirements were reviewed and found compliant with V1.9 of the SPC Benchmark 1™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified using information supplied by IBM Corporation:
 - ✓ Physical Storage Capacity and requirements.
 - ✓ Configured Storage Capacity and requirements.
 - ✓ Addressable Storage Capacity and requirements.
 - ✓ Capacity of each Logical Volume and requirements.
 - ✓ Capacity of each Application Storage Unit (ASU) and requirements.
- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).

Storage Performance Council
 643 Bair Island Road, Suite 103
 Redwood City, CA 94062
AuditService@storageperformance.org
 650.556.9384

- Listings and commands to configure the Benchmark Configuration/Tested Storage Configuration, including customer tunable parameters.
- Commands and parameters used to configure the SPC-1 Workload Generator.
- The following Host System requirements were reviewed using documentation supplied by IBM Corporation:
 - ✓ The type of Host System including the number of processors and main memory.
 - ✓ The presence and version number of the Workload Generator on the Host System.
 - ✓ The TSC boundary within the Host System.
- The Test Results Files and resultant Summary Results Files received from IBM Corporation for each of following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1 Benchmark Specification:
 - ✓ Data Persistence Test
 - ✓ Sustainability Test Phase
 - ✓ IOPS Test Phase
 - ✓ Response Time Ramp Test Phase
 - ✓ Repeatability Test
- The differences between the Tested Storage Configuration (TSC) used for the benchmark and Priced Storage Configuration are noted below.
- The final version of the pricing spreadsheet met all of the requirements and constraints of Clause 8 of the SPC-1 Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 9 of the SPC-1 Benchmark Specification.

Audit Notes:

- The Priced Storage Configuration included sixteen (16) IBM DS4000 Single Port HBAs rather than the eight (8) QLogic 2342 Dual Port HBAs used in the TSC.
- The IBM TotalStorage® SAN Switch 2005-B32 is an IBM relabeled version of the Brocade SilkWorm 4100 Switch, identical to the component used in the TSC.
- Five meter fibre optic cables were priced rather than the thirty meter cables used in the TSC.
- Each disk drive in the Priced Storage Configuration is mounted in an IBM drive carrier and configured to self-identify as a FASTT brand.
- The “data scrubbing” option has a default setting of ‘off’ in the TSC, but would need to be explicitly set to ‘off’ in the Priced Storage Configuration.


Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

IBM TotalStorage® DS4800
SPC-1 Audit Certification

Page 3

If the TSC had been configured and measured with any combination of the above substituted components, there would not have been any negative impact on the reported performance.

Respectfully,



Walter E. Baker
SPC Auditor

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

LETTER OF GOOD FAITH

Date: May 2, 2005

To: Mr. Walter E. Baker, SPC Auditor
Gradient Systems, Inc.
643 Bair Island Road, Suite 103
Redwood City, CA 94063

Subject: SPC-1 Letter of Good Faith for the IBM® TotalStorage® DS4800

IBM Corporation is the SPC-1 Test Sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1 benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with Version 1.9 of the SPC-1 benchmark specification.

Our disclosure of the Benchmark Configuration and execution of the benchmark includes all items that, to the best of our knowledge and belief, materially affect the reported results, regardless of whether such items are explicitly required to be disclosed by the SPC-1 benchmark specification.

A handwritten signature in black ink, appearing to read 'Barry Rudolph'.

Barry Rudolph
Vice President and Business Line Executive, Storage Systems

EXECUTIVE SUMMARY**Test Sponsor and Contact Information**

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	IBM Corporation – http://www.ibm.com Peter Leung – leungp@us.ibm.com 65S/9062-2 9000 South Rita Road Tucson, AZ 85744 Phone: (520) 799-2853 FAX: (520) 799-5530
Test Sponsor Alternate Contact	IBM Corporation – http://www.ibm.com Bruce McNutt – bmcnutt@us.ibm.com KBV/9062-2 9000 South Rita Road Tucson, AZ 85744 Phone: (520) 799-2460 FAX: (520) 799-5530
Auditor	Storage Performance Council – http://www.StoragePerformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.9
SPC-1 Workload Generator revision number	V2.00.04a
Date Results were first used publicly	May 9, 2005
Date FDR was submitted to the SPC	May 9, 2005
Date the TSC is/was available for shipment to customers	June 17, 2005
Date the TSC completed audit certification	May 5, 2005

Summary of Results

SPC-1 Results	
Tested Storage Configuration (TSC) Name: IBM TotalStorage® DS4800	
Metric	Reported Result
SPC-1 IOPS™	42,254.07
SPC-1 Price-Performance	\$17.55/SPC-1 IOPS™
Total ASU Capacity	6,871.109GB
Data Protection Level	Mirroring
Total TSC Price (including three-year maintenance)	\$741,670


SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity read and written in the course of executing the SPC-1 benchmark.

A **Data Protection Level** of Mirroring configures two or more identical copies of user data.

Storage Capacities and Relationships


The following diagram documents the various storage capacities, used in this benchmark, and their relationships.

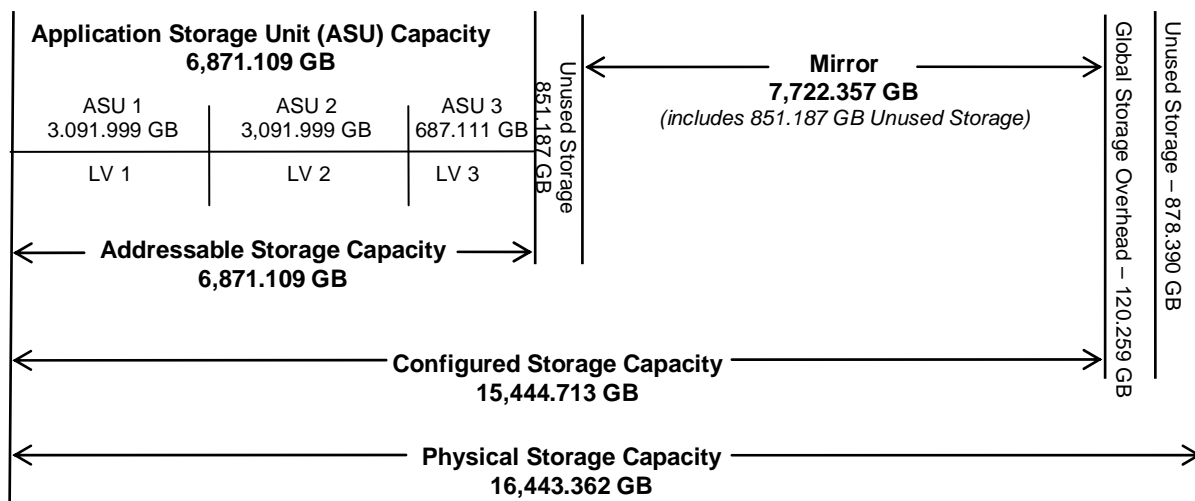

Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

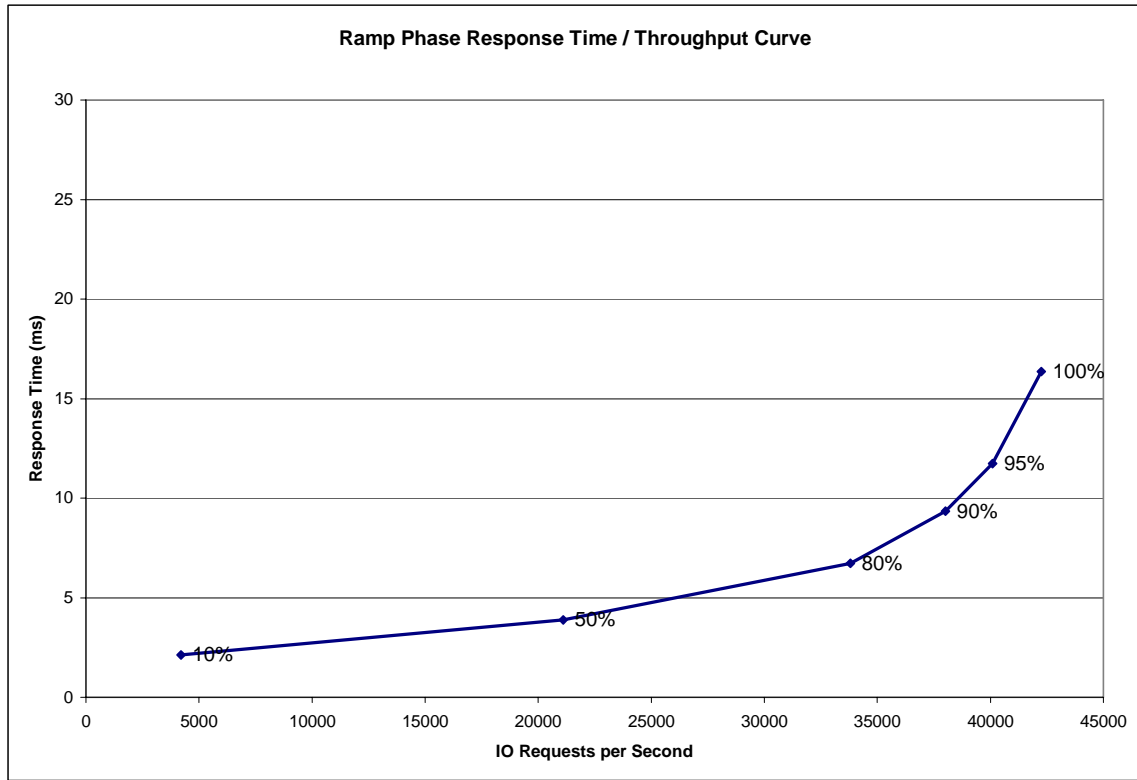

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	4,199.77	21,102.43	33,802.92	38,003.23	40,091.69	42,254.07
Average Response Time (ms):						
All ASUs	2.12	3.88	6.74	9.34	11.75	16.36
ASU-1	2.76	4.89	7.86	10.31	12.50	16.69
ASU-2	2.75	5.45	9.83	13.34	16.29	21.94
ASU-3	0.50	1.05	2.99	5.53	8.16	13.23
Reads	4.70	8.34	12.63	15.36	17.47	21.46
Writes	0.45	0.97	2.90	5.42	8.02	13.05

Tested Storage Configuration Pricing (*Priced Storage Configuration*)

	<u>QTY</u>	<u>list price</u>	<u>extended</u>	<u>total</u>
1815-82A DS4800 Model 82	1	\$53,995	\$53,995	
2104 DS4000 Host Bus Adapter	16	\$1,485	\$23,760	
2410 SW 4Gbps SFP pairs	4	\$998	\$3,992	
5605 5m Fiber Optic cable	8	\$129	\$1,032	
7700 Windows Host Kit	1	\$1,250	\$1,250	
8870 Eight Storage Partitions	1	\$10,000	\$10,000	
9202 Field Integrate	1	n/c	n/c	
9800 Group 1 Power Cords	1	n/c	n/c	
warranty upgrade to 24x7x4	1	\$3,200	\$3,200	
1740-710 DS4000 EXP710 Expansion Unit	16	\$6,000	\$96,000	
2210 SW 2Gbps SFP	72	\$499	\$35,928	
5601 1m Fiber Optic cable	28	\$79	\$2,212	
5605 5m Fiber Optic cable	4	\$129	\$516	
5213 73GB/15K FC Disk Module	224	\$2,099	\$470,176	
9018 Attach to DS4800	16	n/c	n/c	
9800 Group 1 Power Cords	16	n/c	n/c	
warranty upgrade to 24x7x4	1	\$760	\$760	
IBM TotalStorage SAN32B-2 4Gbps fabric				
2005-B32 switch with 16 ports and dual power supply	1	\$17,750	\$17,750	
2410 4 Gbps SW SFP Transceiver	32	\$150	\$4,800	
5605 Fibre Cabe LC/LC 5M Multi	16	\$105	\$1,680	
7510 B32 Ports 16-23 Activation	1	\$9,000	\$9,000	
Warranty upgrade for 3 years	1	\$5,619	\$5,619	

\$741,670

Maintenance/support is provided 24 hours per day, 7 days per week for three years with four hour acknowledgement and four hour subsequent response (support engineer onsite or customer replaceable part available).

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration


The differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration are listed below:

- The Priced Storage Configuration included sixteen (16) IBM DS4000 Single Port HBAs rather than the eight (8) QLogic 2342 Dual Port HBAs used in the TSC.
- The IBM TotalStorage® SAN Switch 2005-B32 is an IBM relabeled version of the Brocade SilkWorm 4100 Switch, identical to the component used in the TSC.
- Five meter fibre optic cables were priced rather than the thirty meter cables used in the TSC.
- Each disk drive in the Priced Storage Configuration is mounted in an IBM drive carrier and configured to self-identify as a FAStT brand.

- The “data scrubbing” option has a default setting of ‘off’ in the TSC, but would need to be explicitly set to ‘off’ in the Priced Storage Configuration.

If the TSC had been configured and measured with any combination of the above, there would not have been any negative impact on the reported performance.

Benchmark Configuration/Tested Storage Configuration Diagram

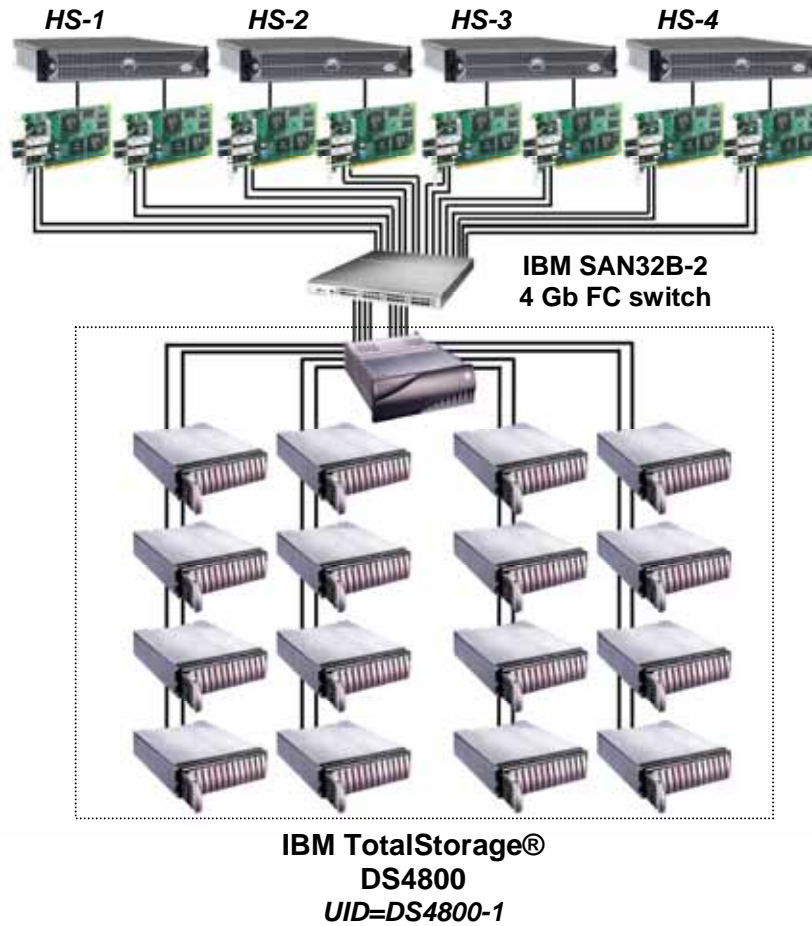

Host Systems:	Tested Storage Configuration (TSC)
UID=HS-1, HS-2, HS-3, HS-4:	SANtricity Storage Manager v9.
4 – Dell 2650 Servers, each configured with: 2 – 3.2 GHz Pentium 4 Xeon CPUs 512 KB L2 and 2 MB L3 caches/CPU 3 GB main memory Windows 2003 Enterprise Edition	8 – Qlogic 2342 HBAs (2 per Host System)
WG	1 – IBM TotalStorage SAN32B-2 switch
	UID=DS4800-1:
	IBM TotalStorage® DS4800 which includes: 2 – disk array controllers with 2 GB RAM per controller
	8 – 4 Gb Fibre Channel host connections 8 – 2 Gb Fibre Channel host connections
	16 – DS4000 EXP710 Expansion Units
	224 – 73 GB 15K RPM Disk Drives

CONFIGURATION INFORMATION

Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram

Clause 9.2.4.4.1

A one page Benchmark Configuration (BC)/Tested Storage Configuration (TSC) diagram shall be included in the Executive Summary...

A diagram of the benchmark configuration and tested storage configuration is included on the preceding page. The configuration consists of four Host Systems, with two Qlogic 2342 PCI to dual-channel 2 Gb fibre channel host adapters each. The sixteen Host System, fibre channel connections, are connected to a IBM TotalStorage® SAN32B-2 4Gb switch. The eight fibre channel host connections on the IBM TotalStorage® DS4800 are also connected to the IBM switch, and are running at 4 Gb. The Host Systems are running Windows 2003 Enterprise Edition. The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page 15 (*Benchmark Configuration/Tested Storage Configuration Diagram*).

Storage Network Configuration

Clause 9.2.4.4.1

...

- 5. If the TSC contains network storage, the diagram will include the network configuration. If a single diagram is not sufficient to illustrate both the Benchmark Configuration and network configuration in sufficient detail, the Benchmark Configuration diagram will include a high-level network illustration as shown in Figure 9-8. In that case, a separate, detailed network configuration diagram will also be included as described in Clause 9.2.4.4.2.*

Clause 9.2.4.4.2

If a storage network was configured as a part of the Tested Storage Configuration and the Benchmark Configuration diagram described in Clause 9.2.4.4.1 contains a high-level illustration of the network configuration, the Executive Summary will contain a one page topology diagram of the storage network as illustrated in Figure 9-9.

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) was configured with local storage and, as such, did not employ a storage network.

Host System Configuration

Clause 9.2.4.4.3

The FDR shall minimally contain, for each Host System running the Workload Generator, a listing of the following:

1. Number and type of CPUs.
2. Main memory capacity.
3. Cache memory capacity.
4. Number and type of disk controllers or Host Bus Adapters.

SANtricity 9.14, Redundant Disk Array Controller (RDAC) package, was installed to support controller failover in the event of a host to disk array IO path failure. Other than installation, no additional configuration of this software was required.

The details of the Host System configuration may be found on page 15 (*Benchmark Configuration/Tested Storage Configuration Diagram*).

Customer Tunable Parameters and Options

Clause 9.2.4.5.1

All Benchmark Configuration (BC) components with customer tunable parameter and options that have been altered from their default values must be listed in the FDR. The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option. If the parameter name is not self-explanatory to a knowledgeable practitioner, a brief description of the parameter's use must also be included in the FDR entry.

“Appendix A: Customer Tunable Parameters and Options” on page 57 contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

Tested Storage Configuration (TSC) Description

Clause 9.2.4.5.2

The FDR must include sufficient information to recreate the logical representation of the TSC. In addition to customer tunable parameters and options (Clause 4.2.4.5.3), that information must include, at a minimum:

- A diagram and/or description of the following:
 - All physical components that comprise the TSC. Those components are also illustrated in the BC Configuration Diagram in Clause 9.2.4.4.1 and/or the Storage Network Configuration Diagram in Clause 9.2.4.4.2.
 - The logical representation of the TSC, configured from the above components that will be presented to the Workload Generator.
- Listings of scripts used to create the logical representation of the TSC.
- If scripts were not used, a description of the process used with sufficient detail to recreate the logical representation of the TSC.

“Appendix B: Tested Storage Configuration (TSC) Creation” on page 59 contains the detailed information that describes how to create and configure the logical TSC.

SPC-1 Workload Generator Storage Configuration

Clause 9.2.4.5.3

The FDR must include all SPC-1 Workload Generator storage configuration commands and parameters.

The SPC-1 Workload Generator storage configuration commands and parameters for this measurement appear in “Appendix C: SPC-1 Workload Generator Storage Commands and Parameters” on page 63.

DATA REPOSITORY

Definitions

Total ASU Capacity: The total storage capacity read and written in the course of executing the SPC-1 benchmark.

Application Storage Unit (ASU): The logical interface between the storage and SPC-1 Workload Generator. The three ASUs (Data, User, and Log) are typically implemented on one or more Logical Volume.

Logical Volume: The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-1 benchmark. Each Logical Volume is implemented as a single, contiguous address space.

Addressable Storage Capacity: The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-1 Workload Generator.

Configured Storage Capacity: This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

Physical Storage Capacity: The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

Data Protection Overhead: The storage capacity required to implement the ECC data protection.

Required Storage: The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the three ASUs.

Global Storage Overhead: The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

Total Unused Storage: The amount of storage capacity available for use by application programs but not included in the Total ASU Capacity.

Storage Capacities and Relationships

Two tables and an illustration documenting the storage capacities and relationships of the SPC-1 Storage Hierarchy (Clause 2.1) shall be included in the FDR.

SPC-1 Storage Capacities

SPC-1 Storage Capacities		
Storage Hierarchy Component	Units	Capacity
Total ASU Capacity	Gigabytes (GB)	6,871.109
Addressable Storage Capacity	Gigabytes (GB)	6,871.109
Configured Storage Capacity	Gigabytes (GB)	15,444.713
Physical Storage Capacity	Gigabytes (GB)	16,443.362
Data Protection Overhead (mirror)	Gigabytes (GB)	7,722.357
Required Storage	Gigabytes (GB)	0.000
Global Storage Overhead	Gigabytes (GB)	120.259
Total Unused Storage	Gigabytes (GB)	2,580.764


SPC-1 Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	100.00%	44.49%	41.79%
Required for Data Protection (Mirroring)		50.00%	46.96%
Addressable Storage Capacity		44.49%	41.79%
Required Storage		0.00%	0.00%
Configured Storage Capacity			93.93%
Global Storage Overhead			0.73%
Unused Storage:			
Addressable	0.00%		
Configured		11.02%	
Physical			5.34%

The Physical Storage Capacity consisted of 16,443.262 GB distributed over 224 disk drives each with a formatted capacity of 73.408 GB. There was 878.39 GB (5.34%) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 120.259 GB (0.73%) of Physical Storage Capacity. There was 1,702.375 GB (11.02%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 100% of the Addressable Storage Capacity resulting in 0.000 GB (0.00%) of Unused Storage within the Addressable Storage Capacity.

SPC-1 Storage Capacities and Relationships Illustration

The various storage capacities configured in the benchmark result are illustrated below (not to scale).

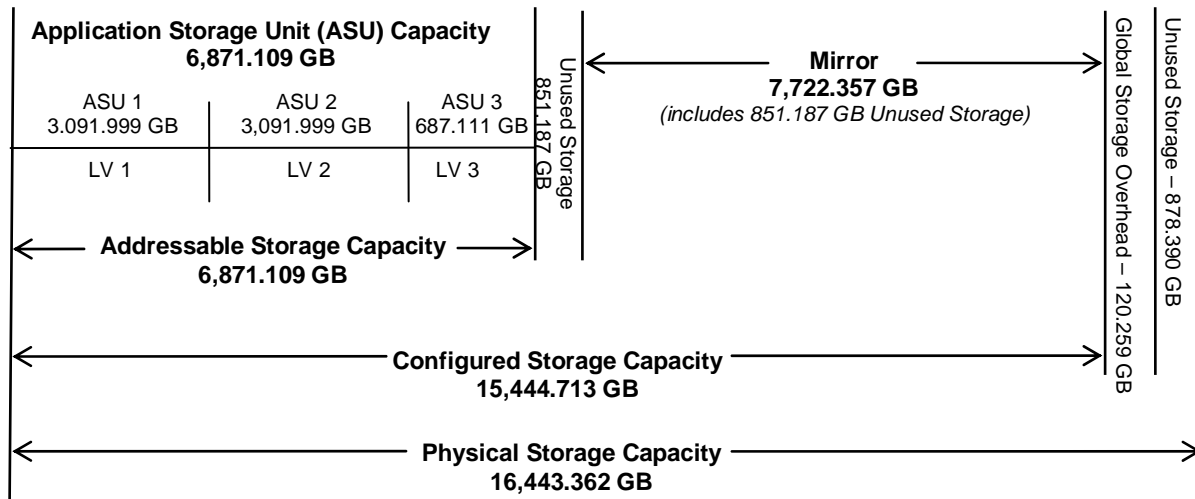

Logical Volume Capacity and ASU Mapping

Clause 9.2.4.6.2

A table illustrating the capacity of each ASU and the mapping of Logical Volumes to ASUs shall be provided in the FDR. ... Logical Volumes shall be sequenced in the table from top to bottom per its position in the contiguous address space of each ASU. The capacity of each Logical Volume shall be stated. ... In conjunction with this table, the Test Sponsor shall provide a complete description of the type of data protection (see Clause 2.4.5) used on each Logical Volume.

Logical Volume Capacity and Mapping		
ASU-1 (3,091.999 GB)	ASU-2 (3,091.999 GB)	ASU-3 (687.111 GB)
1 Logical Volume 3,091.999GB per Logical Volume (3,091.999 GB used per Logical Volume)	1 Logical Volume 3,091.999 GB per Logical Volume (3,091.999 GB used per Logical Volume)	1 Logical Volume 687.111 GB per Logical Volume (687.111 GB used per Logical Volume)

The Data Protection Level used for all Logical Volumes was Mirroring as described on page 11. See “ASU Configuration” in the [IOPS Test Results File](#) for more detailed configuration information.

SPC-1 BENCHMARK EXECUTION RESULTS

Definitions

Average Response Time: *The sum of the Response Times for all Measured I/O Requests divided by the total number of Measured I/O Requests.*

I/O Request Throughput: *The total number of Measured I/O requests in an SPC-1 Test Run divided by the duration of the Measurement Interval in seconds.*

Measurement Interval: *The finite and contiguous time period, after the Tested Storage Configuration (TSC) has reached Steady State, when data is collected by a Test Sponsor to generate an SPC-1 test result or support an SPC-1 test result.*

Steady State: *The consistent and sustainable throughput of the TSC. During this period the load presented to the TSC by the Workload Generator is constant. Comment: Steady Stated is achieved only after caches in the TSC have filled and as a result the I/O Request throughput of the TSC has stabilized.*

Test: *A collection of Test Phases or Test Runs sharing a common objective.*

Test Phase: *A collection of one or more SPC-1 Test Runs sharing a common objective and intended to be run in a specific sequence.*

Test Run: *The execution of SPC-1 for the purpose of producing or supporting an SPC-1 test result. SPC-1 Test Runs may have a finite and measured Ramp-Up period, Start-Up period, Shut-Down period, and Ramp-Down period as illustrated in the Figure 5-1 below. All SPC-1 Test Runs shall have a Steady State period and a Measurement Interval.*

The SPC-1 benchmark consists of the following Tests, Test Phases, and Test Runs:

- **Data Persistence Test**
 - Data Persistence Test Run 1
 - Data Persistence Test Run 2
- **Primary Metrics Test**
 - Sustainability Test Phase and Test Run
 - IOPS Test Phase and Test Run
 - Response Time Ramp Test Phase
 - 95% of IOPS Test Run
 - 90% of IOPS Test Run
 - 80% of IOPS Test Run
 - 50% of IOPS Test Run
 - 10% of IOPS Test Run (LRT)
- **Repeatability Test**
 - Repeatability Test Phase 1
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
 - Repeatability Test Phase 2
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

Primary Metrics Test – Sustainability Test Phase

Clause 5.4.2.1

The Sustainability Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of three (3) hours. The intent is to demonstrate a sustained maximum I/O Request Throughput as well as insuring the Tested Storage Configuration (TSC) has reached steady state prior to measuring the maximum I/O Request Throughput (SPC-1™ IOPS).

The reported I/O Request Throughput of the Sustainability Test Run must be within 5% of the reported SPC-1™ IOPS primary metric. The Average Response Time measured in Sustainability Test Run cannot exceed thirty (30) milliseconds.

Clause 9.2.4.7.1

For the Sustainability Test Phase the FDR shall contain:

- 1. A Data Rate Distribution graph and data table.*
- 2. I/O Request Throughput Distribution graph and data table.*
- 3. A Response Time Frequency Distribution graph and table.*
- 4. An Average Response Time Distribution graph and table.*
- 5. The human readable Test Run Results File produced by the Workload Generator (may be included in an appendix).*
- 6. A listing or screen image of all input parameters supplied to the Workload Generator (may be included in an appendix).*
- 7. The Measured Intensity Multiplier for each I/O stream.*
- 8. The variability of the Measured Intensity Multiplier, as defined in Clause 5.3.13.3.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are listed below.


`java -Xmx256m -Xms256m metrics -b 845 -s 300`

Sustainability Test Results File


A link to the test results file generated from the Sustainability Test Run is listed below.

[Sustainability Test Results File](#)


Sustainability – Data Rate Distribution Graph

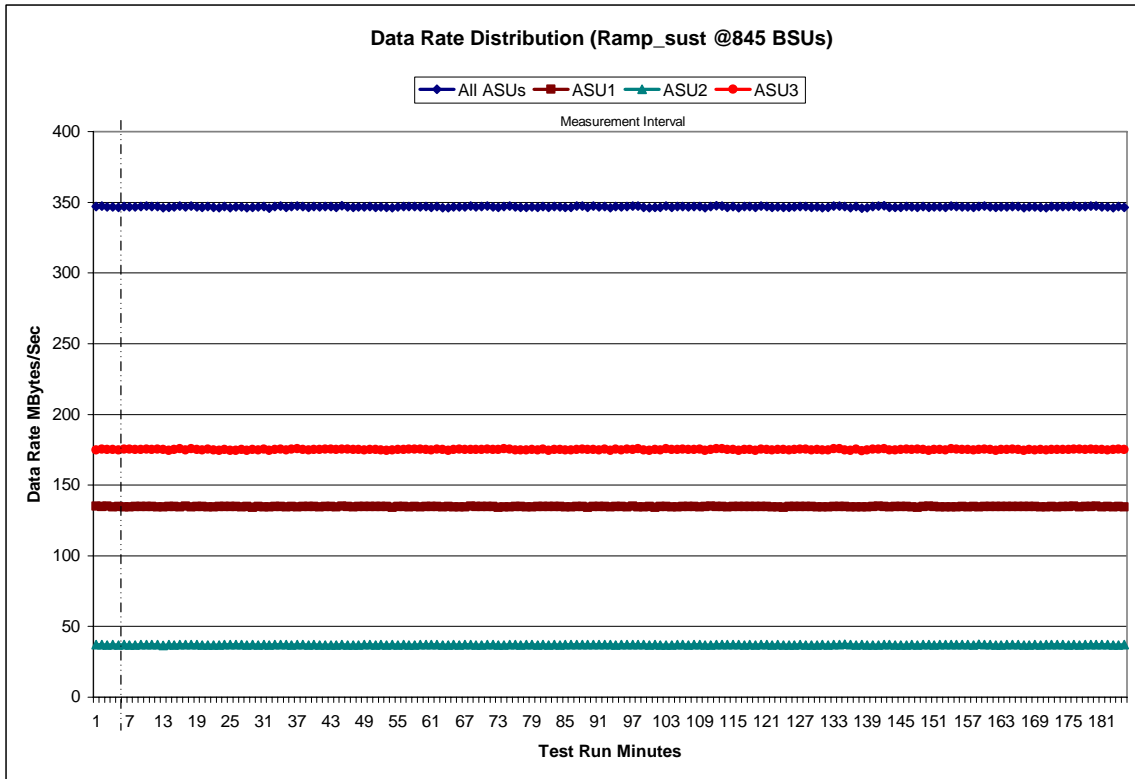

Sustainability – I/O Request Throughput Distribution Graph

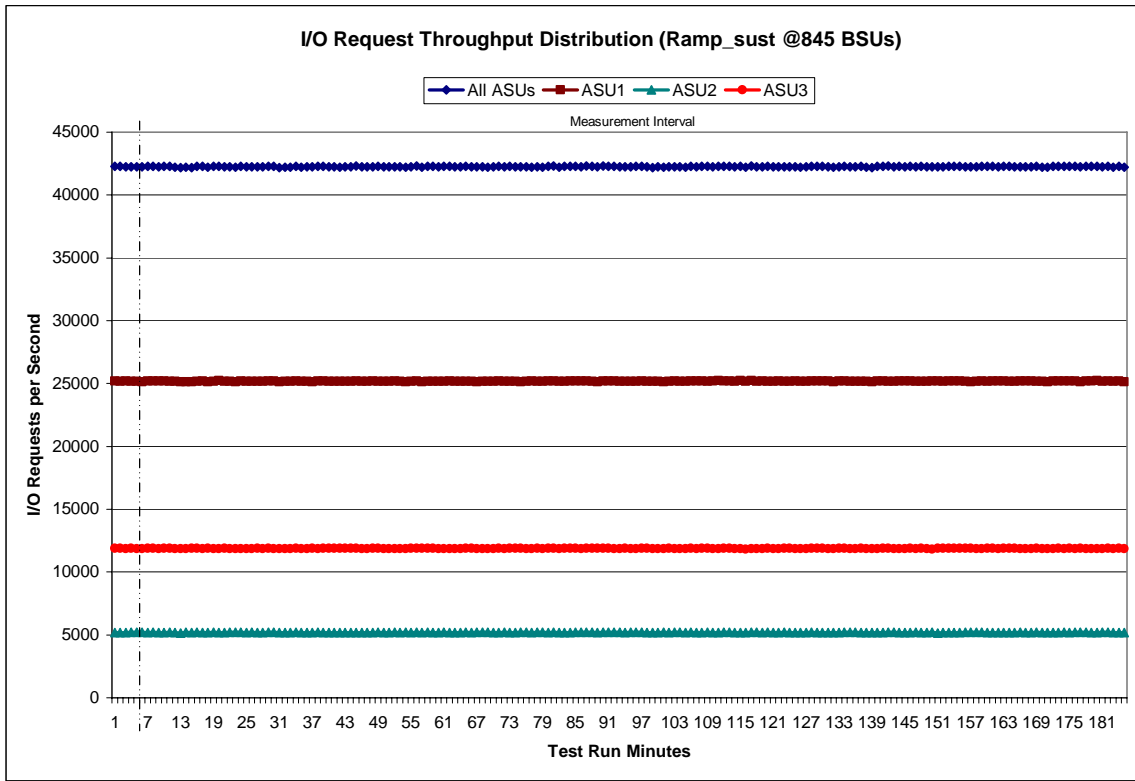


Sustainability – Average Response Time (ms) Distribution Graph

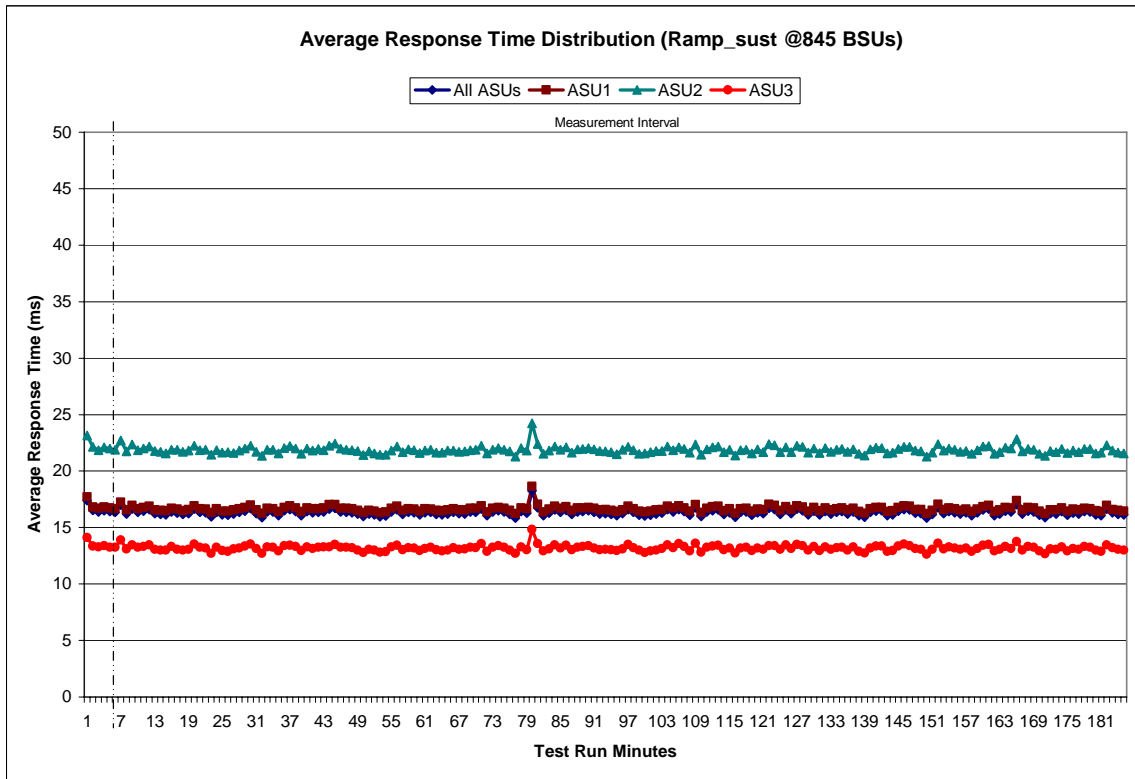

Sustainability – Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	13388	246,919	272,203	200,985	188,090	157,716	119,378	85,536
Write	0	115	1,159	4,103	12,779	29,851	55,495	73,384
All ASUs	13388	247,034	273,362	205,088	200,869	187,567	174,873	158,920
ASU1	12564	231,105	254,999	189,453	180,888	160,583	136,582	113,724
ASU2	824	15,895	17,986	14,200	15,052	15,125	15,892	15,145
ASU3	0	34	377	1,435	4,929	11,859	22,399	30,051
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	222,052	192,576	280,276	328,228	640,729	792,401	2,643,831	4,583,899
Write	434,332	715,664	1,396,579	1,750,023	3,387,070	3,721,839	10,451,219	15,408,238
All ASUs	656,384	908,240	1,676,855	2,078,251	4,027,799	4,514,240	13,095,050	19,992,137
ASU1	409,634	513,781	912,879	1,115,919	2,161,136	2,443,367	7,191,080	11,135,038
ASU2	65,838	92,628	170,656	208,305	401,162	443,733	1,286,148	1,988,151
ASU3	180,912	301,831	593,320	754,027	1,465,501	1,627,140	4,617,822	6,868,948
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	5,914,692	7,704,126	8,161,200	44,784,619	33,797,652	21,357,968	13,666,520	33,629,412
Write	17,432,593	21,178,375	21,023,818	97,794,179	52,260,174	19,706,534	6,019,684	3,496,321
All ASUs	23,347,285	28,882,501	29,185,018	142,578,798	86,057,826	41,064,502	19,686,204	37,125,733
ASU1	13,134,822	16,328,344	16,555,619	82,121,927	51,514,254	26,388,173	13,787,453	24,990,836
ASU2	2,360,157	2,963,319	3,027,042	14,986,609	9,540,894	5,097,285	2,962,719	10,422,090
ASU3	7,852,306	9,590,838	9,602,357	45,470,262	25,002,678	9,579,044	2,936,032	1,712,807

Sustainability – Response Time Frequency Distribution Graph

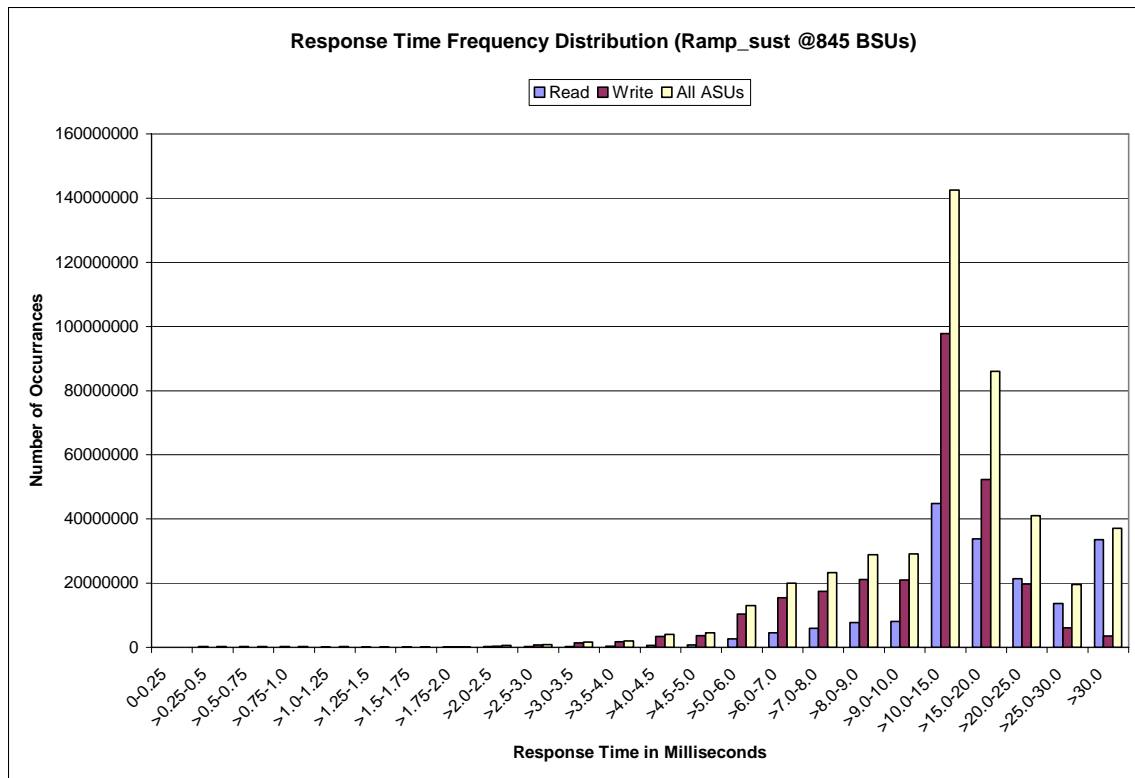

Sustainability – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.004	0.001	0.002	0.001	0.004	0.003	0.003	0.001

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.0 and 5.3.13.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.13.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Primary Metrics Test – IOPS Test Phase

Clause 5.4.2.2

The IOPS Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of ten (10) minutes. The IOPS Test Phase immediately follows the Sustainability Test Phase without any interruption or manual intervention.

The IOPS Test Run generates the SPC-1 IOPS™ primary metric, which is computed as the I/O Request Throughput for the Measurement Interval of the IOPS Test Run.

The Average Response Time is computed for the IOPS Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds the 30 millisecond constraint, the measurement is invalid.

Clause 9.2.4.7.2

For the IOPS Test Phase the FDR shall contain:

- 1. I/O Request Throughput Distribution (data and graph).*
- 2. A Response Time Frequency Distribution.*
- 3. An Average Response Time Distribution.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*
- 6. The total number of I/O Requests completed in the Measurement Interval as well as the number of I/O Requests with a Response Time less than or equal to 30 milliseconds and the number of I/O Requests with a Response Time greater than 30 milliseconds.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are listed below.

```
java -Xmx256m -Xms256m metrics -b 845 -s 300
```

IOPS Test Results File


A link to the test results file generated from the IOPS Test Run is listed below.

[IOPS Test Results File](#)

IOPS Test Run – I/O Request Throughput Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	17:28:10	17:33:11	0-4	0:05:01
<i>Measurement Interval</i>	17:33:11	17:43:11	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	42,236.43	25,200.50	5,189.47	11,846.47
1	42,258.13	25,177.70	5,201.17	11,879.27
2	42,198.58	25,171.52	5,193.45	11,833.62
3	42,215.47	25,174.78	5,188.65	11,852.03
4	42,278.58	25,182.28	5,208.03	11,888.27
5	42,241.83	25,190.90	5,198.25	11,852.68
6	42,237.38	25,169.63	5,188.07	11,879.68
7	42,282.78	25,214.03	5,208.52	11,860.23
8	42,278.03	25,200.03	5,201.02	11,876.98
9	42,223.32	25,148.77	5,209.00	11,865.55
10	42,219.23	25,173.02	5,189.30	11,856.92
11	42,260.78	25,159.70	5,191.35	11,909.73
12	42,285.35	25,212.53	5,188.78	11,884.03
13	42,242.62	25,175.75	5,186.07	11,880.80
14	42,269.33	25,171.48	5,205.75	11,892.10
Average	42,254.07	25,181.59	5,196.61	11,875.87

IOPS Test Run – I/O Request Throughput Distribution Graph

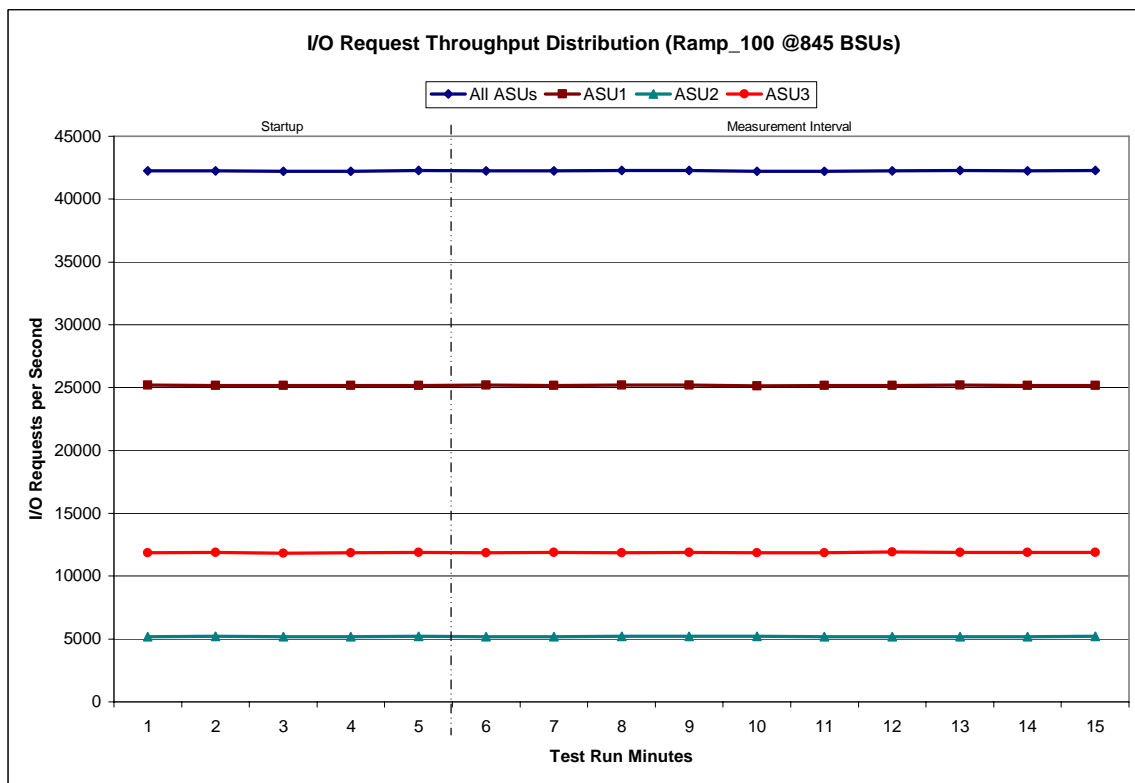


IOPS Test Run – Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	839	14,768	16,537	12,176	11,208	9,365	7,190	5,182
Write	0	4	39	146	570	1,378	2,699	3,752
All ASUs	839	14,772	16,576	12,322	11,778	10,743	9,889	8,934
ASU1	798	13,943	15,532	11,485	10,693	9,369	7,979	6,607
ASU2	41	829	1,035	787	863	815	814	791
ASU3	0	-	9	50	222	559	1,096	1,536

Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	13,237	11,033	15,889	18,277	35,696	43,455	146,443	252,210
Write	22,960	39,107	77,969	98,577	191,650	207,993	576,160	850,067
All ASUs	36,197	50,140	93,858	116,854	227,346	251,448	722,603	1,102,277
ASU1	23,157	28,783	51,507	62,628	121,750	135,893	397,328	613,805
ASU2	3,508	5,006	9,481	11,781	22,583	24,472	70,942	109,282
ASU3	9,532	16,351	32,870	42,445	83,013	91,083	254,333	379,190

Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	325,108	424,973	450,325	2,475,281	1,876,168	1,189,523	762,571	1,878,981
Write	966,513	1,172,977	1,165,841	5,399,038	2,909,541	1,111,807	350,182	206,320
All ASUs	1,291,621	1,597,950	1,616,166	7,874,319	4,785,709	2,301,330	1,112,753	2,085,301
ASU1	725,857	902,418	915,986	4,536,888	2,863,673	1,476,186	775,244	1,400,999
ASU2	130,400	163,994	167,712	826,748	530,873	285,484	166,350	583,263
ASU3	435,364	531,538	532,468	2,510,683	1,391,163	539,660	171,159	101,039


IOPS Test Run –Response Time Frequency Distribution Graph

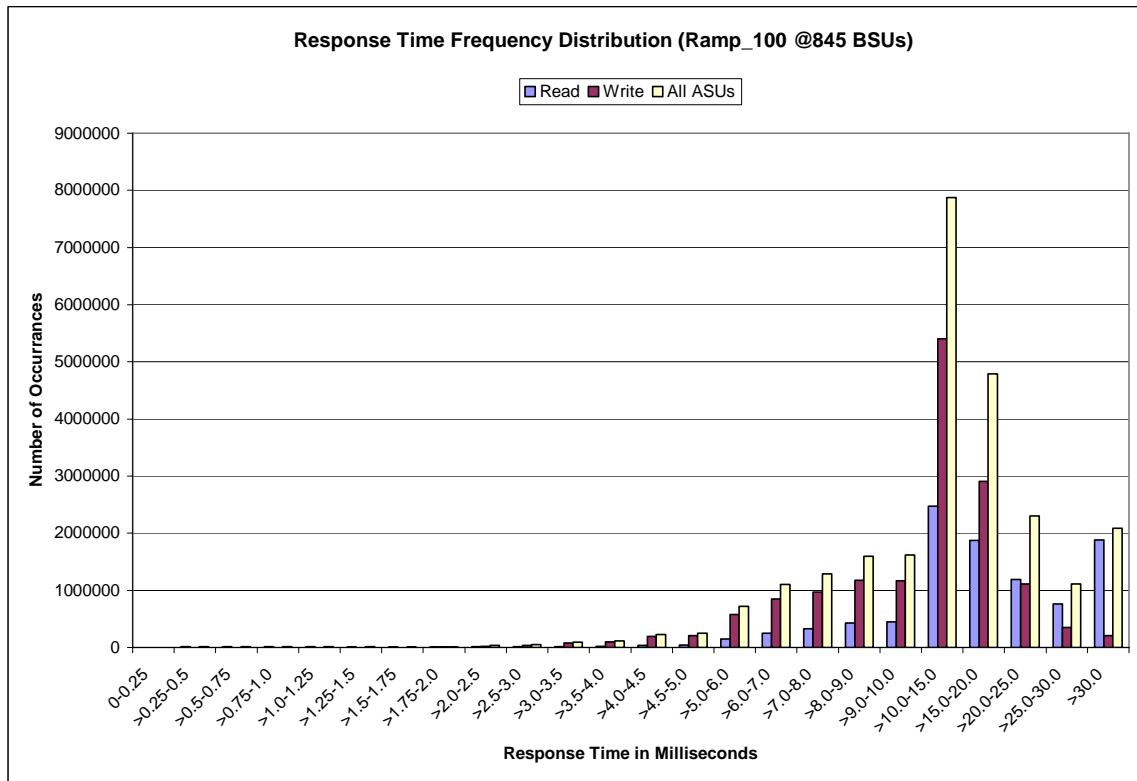

IOPS Test Run – Average Response Time (ms) Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	17:28:10	17:33:11	0-4	0:05:01
<i>Measurement Interval</i>	17:33:11	17:43:11	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	16.65	16.95	21.99	13.66
1	16.23	16.56	21.75	13.12
2	16.14	16.48	21.72	12.96
3	16.08	16.43	21.62	12.91
4	16.38	16.71	21.92	13.25
5	16.23	16.57	21.76	13.07
6	16.22	16.57	21.73	13.07
7	16.54	16.85	22.19	13.42
8	16.61	16.90	22.24	13.51
9	16.19	16.53	21.72	13.05
10	16.03	16.38	21.58	12.84
11	16.41	16.72	21.99	13.31
12	16.57	16.89	22.17	13.44
13	16.59	16.88	22.20	13.51
14	16.26	16.62	21.83	13.07
Average	16.36	16.69	21.94	13.23

IOPS Test Run – Average Response Time (ms) Distribution Graph

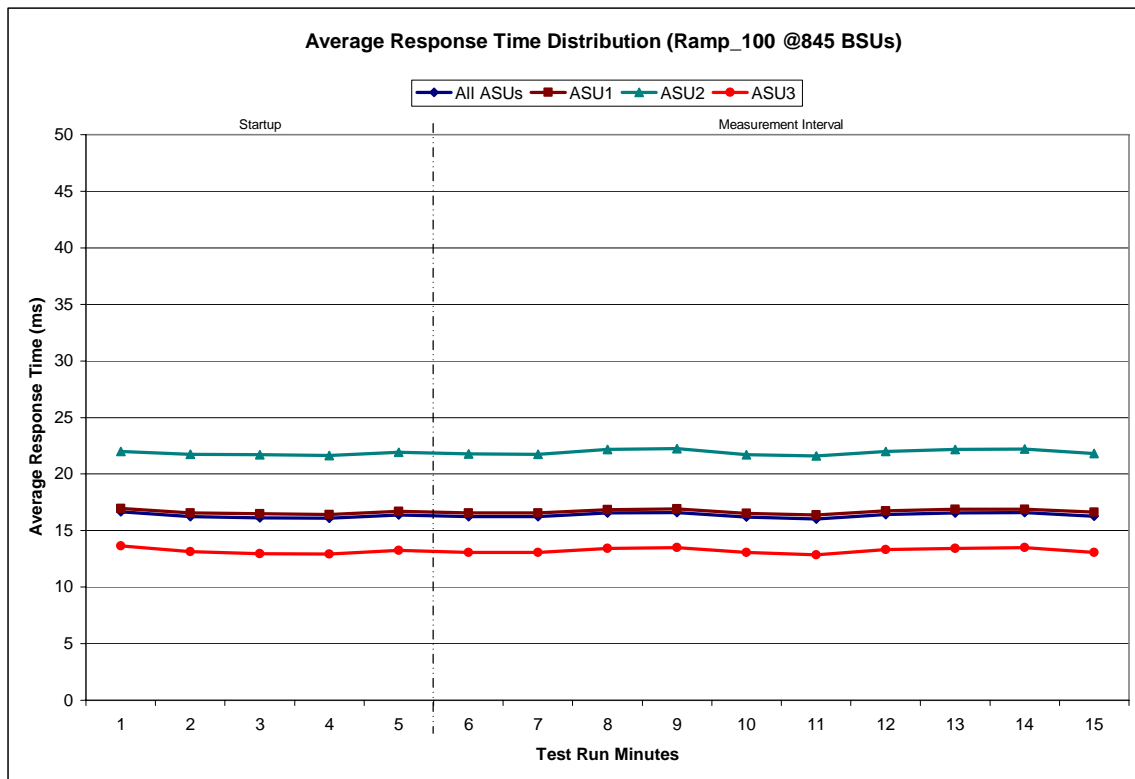

IOPS Test Run – I/O Request Information

I/O Requests Completed in the Measurement Interval	I/O Requests Completed with Response Time = or < 30 ms	I/O Requests Completed with Response Time > 30 ms
25,351,725	23,266,424	2,085,301

IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2809	0.0701	0.2100	0.0180	0.0700	0.0350	0.2811
COV	0.003	0.001	0.001	0.001	0.005	0.003	0.002	0.001

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.0 and 5.3.13.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.13.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Primary Metrics Test – Response Time Ramp Test Phase

Clause 5.4.2.3

The Response Time Ramp Test Phase consists of five Test Runs, one each at 95%, 90%, 80%, 50%, and 10% of the load point (100%) used to generate the SPC-1 IOPS™ primary metric. Each of the five Test Runs has a Measurement Interval of ten (10) minutes. The Response Time Ramp Test Phase immediately follows the IOPS Test Phase without any interruption or manual intervention.

The five Response Time Ramp Test Runs, in conjunction with the IOPS Test Run (100%), demonstrate the relationship between Average Response Time and I/O Request Throughput for the Tested Storage Configuration (TSC) as illustrated in the response time/throughput curve on page 12.

In addition, the Average Response Time measured during the 10% Test Run is the value for the SPC-1 LRT™ metric. That value represents the Average Response Time of a lightly loaded TSC.

Clause 9.2.4.7.3

The following content shall appear in the FDR for the Response Time Ramp Phase:

1. A Response Time Ramp Distribution.
2. The human readable Test Run Results File produced by the Workload Generator for each Test Run within the Response Time Ramp Test Phase.
3. For the 10% Load Level Test Run (SPC-1 LRT™ metric) an Average Response Time Distribution.
4. A listing or screen image of all input parameters supplied to the Workload Generator.

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, and Response Time Ramp Test Runs are listed below.

```
java -Xmx256m -Xms256m metrics -b 845 -s 300
```

Response Time Ramp Test Results File

A link to each test result file generated from each Response Time Ramp Test Run list listed below.

[95% Load Level](#)

[90% Load Level](#)

[80% Load Level](#)

[50% Load Level](#)


[10% Load Level](#)

Response Time Ramp Distribution (IOPS) Data

The five Test Runs that comprise the Response Time Ramp Phase are executed at 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit (BSU) load level used to produce the SPC-1 IOPS™ primary metric. The 100% BSU load level is included in the following Response Time Ramp data tables and graphs for completeness.

100% Load Level - 845 BSUs					95% Load Level - 802 BSUs				
Start	Stop	Interval	Duration		Start	Stop	Interval	Duration	
Start-Up/Ramp-Up	17:28:10	17:33:11	0-4	0:05:01	Start-Up/Ramp-Up	17:43:30	17:48:31	0-4	0:05:01
Measurement Interval	17:33:11	17:43:11	5-14	0:10:00	Measurement Interval	17:48:31	17:58:31	5-14	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	42,236.43	25,200.50	5,189.47	11,846.47	0	40,111.92	23,874.58	4,943.18	11,294.15
1	42,258.13	25,177.70	5,201.17	11,879.27	1	40,097.77	23,913.58	4,910.28	11,273.90
2	42,198.58	25,171.52	5,193.45	11,833.62	2	40,111.52	23,897.45	4,930.15	11,283.92
3	42,215.47	25,174.78	5,188.65	11,852.03	3	40,045.75	23,864.63	4,931.67	11,249.45
4	42,278.58	25,182.28	5,208.03	11,888.27	4	40,100.77	23,908.70	4,928.60	11,263.47
5	42,241.83	25,190.90	5,198.25	11,852.68	5	40,085.65	23,899.43	4,936.57	11,249.65
6	42,237.38	25,169.63	5,188.07	11,879.68	6	40,102.83	23,882.38	4,946.42	11,274.03
7	42,282.78	25,214.03	5,208.52	11,860.23	7	40,155.90	23,939.17	4,944.82	11,271.92
8	42,278.03	25,200.03	5,201.02	11,876.98	8	40,048.32	23,865.18	4,922.97	11,260.17
9	42,223.32	25,148.77	5,209.00	11,865.55	9	40,067.95	23,880.60	4,927.25	11,260.10
10	42,219.23	25,173.02	5,189.30	11,856.92	10	40,099.37	23,897.15	4,928.07	11,274.15
11	42,260.78	25,159.70	5,191.35	11,909.73	11	40,073.67	23,883.92	4,927.77	11,261.98
12	42,285.35	25,212.53	5,188.78	11,884.03	12	40,093.98	23,875.93	4,942.08	11,275.97
13	42,242.62	25,175.75	5,186.07	11,880.80	13	40,099.60	23,896.58	4,940.35	11,262.67
14	42,269.33	25,171.48	5,205.75	11,892.10	14	40,089.58	23,860.92	4,938.80	11,289.87
Average	42,254.07	25,181.59	5,196.61	11,875.87	Average	40,091.69	23,888.13	4,935.51	11,268.05
90% Load Level - 760 BSUs					80% Load Level - 676 BSUs				
Start	Stop	Interval	Duration		Start	Stop	Interval	Duration	
Start-Up/Ramp-Up	17:58:49	18:03:50	0-4	0:05:01	Start-Up/Ramp-Up	18:14:08	18:19:09	0-4	0:05:01
Measurement Interval	18:03:50	18:13:50	5-14	0:10:00	Measurement Interval	18:19:09	18:29:09	5-14	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	38,021.38	22,620.80	4,678.62	10,721.97	0	33,777.48	20,124.17	4,153.27	9,500.05
1	38,028.32	22,676.62	4,671.40	10,680.30	1	33,858.85	20,199.42	4,169.22	9,490.22
2	37,962.05	22,618.18	4,665.17	10,678.70	2	33,790.92	20,150.43	4,157.82	9,482.67
3	37,962.55	22,634.43	4,680.50	10,647.62	3	33,788.55	20,126.62	4,154.63	9,507.30
4	37,995.40	22,654.50	4,680.28	10,660.62	4	33,786.50	20,135.62	4,158.37	9,492.52
5	37,965.92	22,621.33	4,677.87	10,666.72	5	33,773.25	20,133.72	4,143.48	9,496.05
6	37,963.18	22,616.27	4,673.68	10,673.23	6	33,811.73	20,168.53	4,151.60	9,491.60
7	38,004.98	22,662.43	4,668.92	10,673.63	7	33,791.47	20,142.93	4,154.33	9,494.20
8	38,008.33	22,663.18	4,680.35	10,664.80	8	33,856.78	20,179.12	4,159.13	9,518.53
9	38,012.28	22,656.62	4,679.48	10,676.18	9	33,767.48	20,143.93	4,149.87	9,473.68
10	37,972.35	22,634.78	4,666.75	10,670.82	10	33,792.58	20,156.18	4,136.08	9,500.32
11	38,023.27	22,659.82	4,663.78	10,699.67	11	33,819.33	20,161.25	4,140.32	9,517.77
12	38,014.38	22,651.48	4,677.60	10,685.30	12	33,820.58	20,173.70	4,153.72	9,493.17
13	38,040.83	22,657.88	4,691.70	10,691.25	13	33,802.03	20,146.47	4,168.15	9,487.42
14	38,026.80	22,644.95	4,683.08	10,698.77	14	33,793.92	20,161.38	4,148.30	9,484.23
Average	38,003.23	22,646.88	4,676.32	10,680.04	Average	33,802.92	20,156.72	4,150.50	9,495.70
50% Load Level - 422 BSUs					10% Load Level - 84 BSUs				
Start	Stop	Interval	Duration		Start	Stop	Interval	Duration	
Start-Up/Ramp-Up	18:29:26	18:34:27	0-4	0:05:01	Start-Up/Ramp-Up	18:44:44	18:49:45	0-4	0:05:01
Measurement Interval	18:34:27	18:44:27	5-14	0:10:00	Measurement Interval	18:49:45	18:59:45	5-14	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	21,104.75	12,581.00	2,603.72	5,920.03	0	4,209.40	2,509.63	516.88	1,182.88
1	21,065.98	12,555.22	2,584.65	5,926.12	1	4,201.83	2,506.30	517.73	1,177.80
2	21,136.22	12,603.65	2,597.60	5,934.97	2	4,214.50	2,517.85	513.52	1,183.13
3	21,120.42	12,584.22	2,600.53	5,935.67	3	4,216.18	2,521.22	517.17	1,177.80
4	21,115.27	12,579.87	2,596.50	5,938.90	4	4,202.58	2,507.35	513.45	1,181.78
5	21,092.15	12,563.18	2,599.25	5,929.72	5	4,189.88	2,498.27	516.40	1,175.22
6	21,075.17	12,566.52	2,584.52	5,924.13	6	4,199.53	2,507.97	513.82	1,177.75
7	21,100.72	12,587.02	2,584.70	5,929.00	7	4,202.27	2,503.13	519.25	1,179.88
8	21,099.15	12,568.08	2,592.40	5,938.67	8	4,211.68	2,507.38	518.13	1,186.17
9	21,101.28	12,588.42	2,594.95	5,917.92	9	4,193.30	2,496.02	517.10	1,180.18
10	21,107.77	12,584.92	2,587.88	5,934.97	10	4,199.15	2,499.65	518.05	1,181.45
11	21,122.93	12,590.22	2,598.42	5,934.30	11	4,205.87	2,507.97	519.82	1,178.08
12	21,091.37	12,589.52	2,586.70	5,915.15	12	4,201.12	2,502.02	516.00	1,183.10
13	21,106.15	12,576.27	2,597.52	5,932.37	13	4,193.92	2,507.05	516.55	1,170.32
14	21,127.65	12,584.17	2,597.65	5,945.83	14	4,200.98	2,502.73	514.13	1,184.12
Average	21,102.43	12,579.83	2,592.40	5,930.21	Average	4,199.77	2,503.22	516.93	1,179.63


Response Time Ramp Distribution (IOPS) Graph

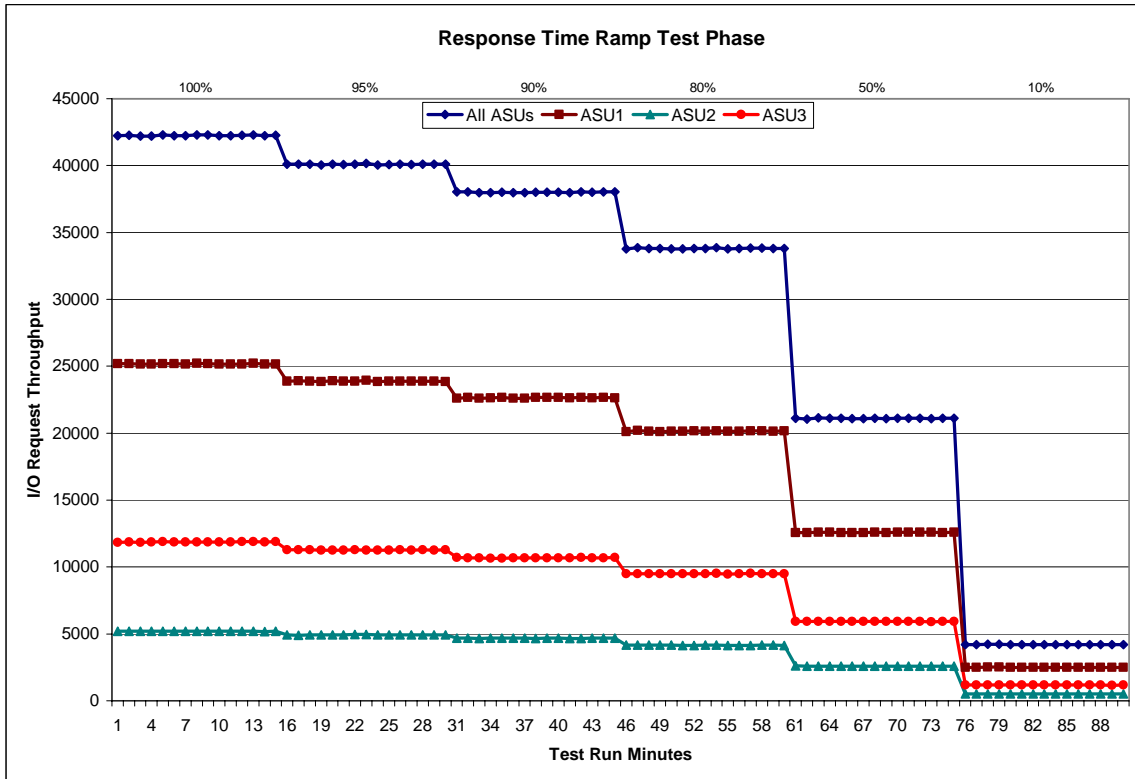

SPC-1 LRT™ Average Response Time (ms) Distribution Data

84 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	18:44:44	18:49:45	0-4	0:05:01
<i>Measurement Interval</i>	18:49:45	18:59:45	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.06	2.69	2.62	0.48
1	2.12	2.75	2.74	0.50
2	2.12	2.75	2.75	0.50
3	2.12	2.75	2.73	0.50
4	2.12	2.76	2.74	0.50
5	2.12	2.75	2.74	0.50
6	2.12	2.76	2.72	0.50
7	2.12	2.75	2.75	0.50
8	2.12	2.76	2.76	0.51
9	2.13	2.77	2.75	0.50
10	2.12	2.75	2.75	0.50
11	2.13	2.76	2.73	0.51
12	2.12	2.75	2.79	0.50
13	2.13	2.76	2.74	0.50
14	2.12	2.75	2.75	0.50
Average	2.12	2.76	2.75	0.50

SPC-1 LRT™ Average Response Time (ms) Distribution Graph

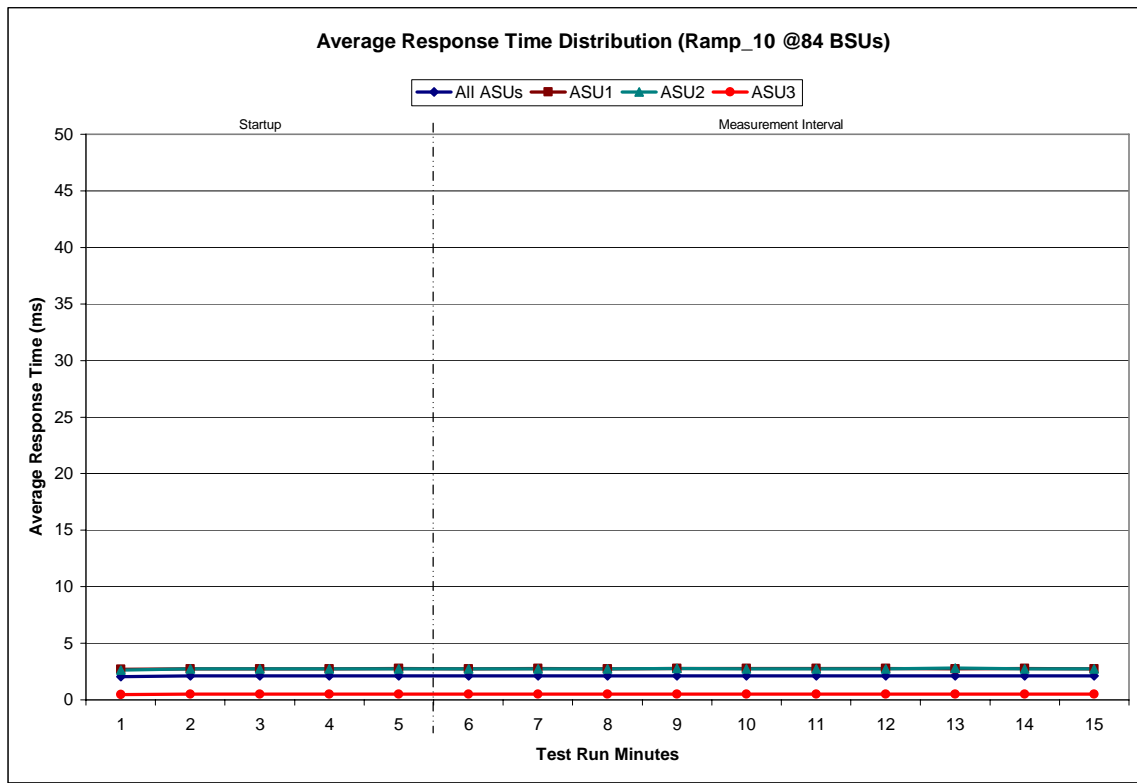

SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2813	0.0699	0.2099	0.0180	0.0701	0.0350	0.2809
COV	0.012	0.004	0.007	0.004	0.009	0.006	0.009	0.003

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.0 and 5.3.13.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.13.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Repeatability Test

Clause 5.4.5

The Repeatability Test demonstrates the repeatability and reproducibility of the SPC-1 IOPS™ primary metric and SPC-1 LRT™ metric generated in earlier Test Runs.

There are two identical Repeatability Test Phases. Each Test Phase contains two Test Runs. Each of the Test Runs will have a Measurement Interval of no less than ten (10) minutes. The two Test Runs in each Test Phase will be executed without interruption or any type of manual intervention.

The first Test Run in each Test Phase is executed at the 10% load point. The Average Response Time from each of the Test Runs is compared to the SPC-1 LRT™ metric. Each Average Response Time value must be less than the SPC-1 LRT™ metric plus 5%.

The second Test Run in each Test Phase is executed at the 100% load point. The I/O Request Throughput from the Test Runs is compared to the SPC-1 IOPS™ primary metric. Each I/O Request Throughput value must be greater than the SPC-1 IOPS™ primary metric minus 5%. In addition, the Average Response Time for each Test Run cannot exceed 30 milliseconds.

If any of the above constraints are not met, the benchmark measurement is invalid.

Clause 9.2.4.7.4

The following content shall appear in the FDR for each Test Run in the two Repeatability Test Phases:

- 1. A table containing the results of the Repeatability Test.*
- 2. An I/O Request Throughput Distribution graph and table.*
- 3. An Average Response Time Distribution graph and table.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Repeatability Test Runs are listed below.

java -Xmx256m -Xms256m repeat1 -b 845 -s 300

java -Xmx256m -Xms256m repeat2 -b 845 -s 300

Repeatability Test Results File

The values for the SPC-1 IOPS™, SPC-1 LRT™, and the Repeatability Test measurements are listed below.

	SPC-1 IOPS™	SPC-1 LRT™
<i>Primary Metrics</i>	42,254.07	2.12
Repeatability Test Phase 1	42,249.90	2.14
Repeatability Test Phase 2	42,247.81	2.15

A link to the test result file generated from each Repeatability Test Run list is listed below.

[Repeatability Test Phase 1, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 1, Test Run 2 \(IOPS\)](#)


[Repeatability Test Phase 2, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 2, Test Run 2 \(IOPS\)](#)

Repeatability 1 LRT - I/O Request Throughput Distribution Data

84 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:00:07	19:05:07	0-4	0:05:00
<i>Measurement Interval</i>	19:05:07	19:15:07	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	4,187.38	2,490.92	520.53	1,175.93
1	4,209.83	2,505.28	519.25	1,185.30
2	4,215.43	2,517.28	522.40	1,175.75
3	4,212.68	2,508.73	519.30	1,184.65
4	4,213.15	2,510.20	518.37	1,184.58
5	4,212.40	2,508.07	516.63	1,187.70
6	4,210.82	2,507.77	520.45	1,182.60
7	4,209.75	2,506.40	516.22	1,187.13
8	4,202.78	2,497.87	514.55	1,190.37
9	4,198.33	2,500.30	515.48	1,182.55
10	4,197.00	2,505.97	515.38	1,175.65
11	4,204.27	2,507.78	518.43	1,178.05
12	4,209.85	2,514.48	519.65	1,175.72
13	4,200.00	2,503.45	516.25	1,180.30
14	4,207.47	2,507.23	517.75	1,182.48
Average	4,205.27	2,505.93	517.08	1,182.26


Repeatability 1 LRT - I/O Request Throughput Distribution Graph

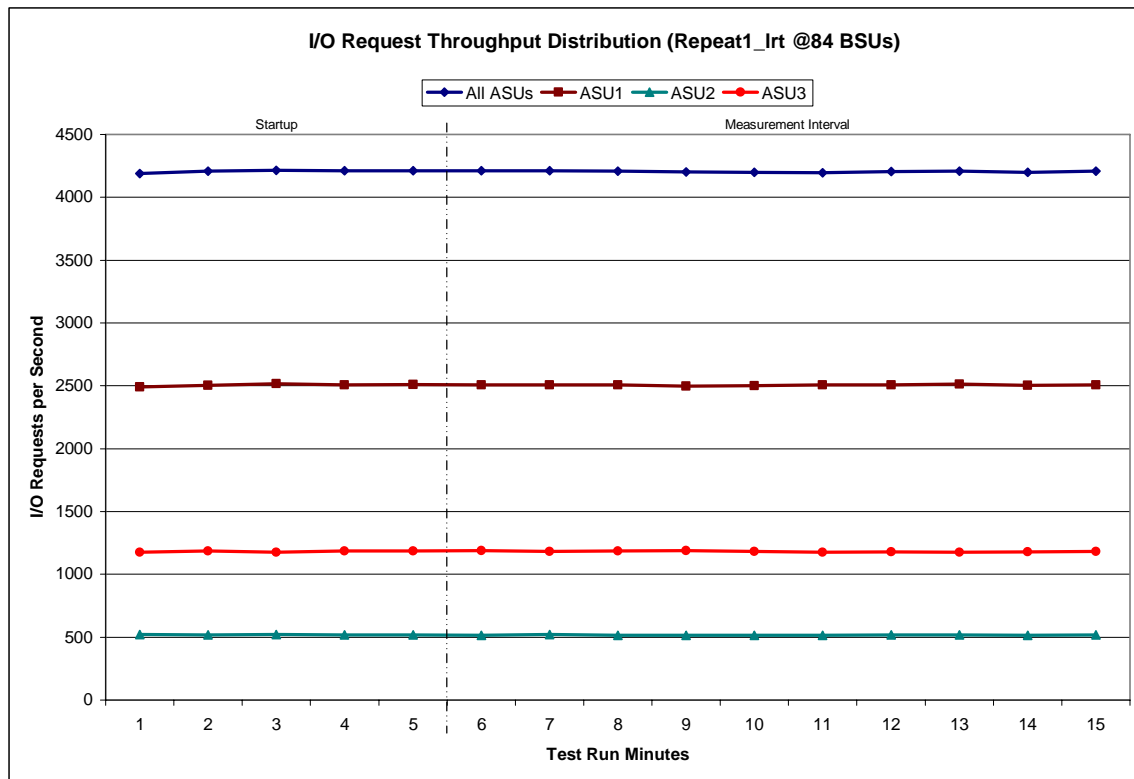

Repeatability 1 LRT –Average Response Time (ms) Distribution Data

84 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:00:07	19:05:07	0-4	0:05:00
<i>Measurement Interval</i>	19:05:07	19:15:07	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.06	2.69	2.60	0.46
1	2.11	2.75	2.75	0.50
2	2.13	2.76	2.73	0.50
3	2.13	2.77	2.75	0.51
4	2.13	2.76	2.76	0.50
5	2.13	2.77	2.74	0.50
6	2.13	2.77	2.76	0.51
7	2.15	2.81	2.78	0.50
8	2.16	2.81	2.78	0.51
9	2.22	2.90	2.90	0.50
10	2.13	2.77	2.77	0.50
11	2.13	2.76	2.74	0.51
12	2.14	2.77	2.80	0.50
13	2.13	2.77	2.75	0.50
14	2.12	2.75	2.70	0.51
Average	2.14	2.79	2.77	0.50


Repeatability 1 LRT –Average Response Time (ms) Distribution Graph

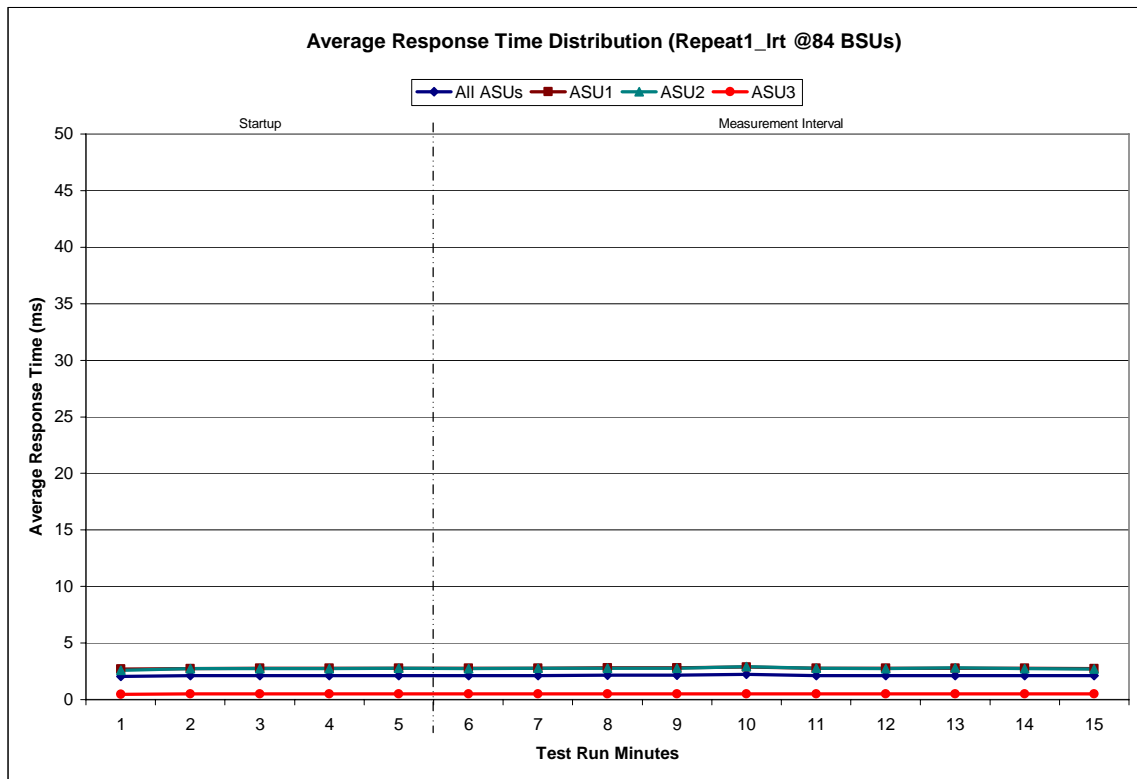

Repeatability 1 IOPS - I/O Request Throughput Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:15:25	19:20:26	0-4	0:05:01
<i>Measurement Interval</i>	19:20:26	19:30:26	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	42,273.45	25,203.12	5,185.72	11,884.62
1	42,279.35	25,208.03	5,193.35	11,877.97
2	42,230.23	25,154.92	5,192.82	11,882.50
3	42,275.05	25,199.95	5,206.88	11,868.22
4	42,220.05	25,159.62	5,192.80	11,867.63
5	42,290.98	25,206.83	5,205.37	11,878.78
6	42,202.93	25,142.13	5,178.55	11,882.25
7	42,203.67	25,150.45	5,198.65	11,854.57
8	42,234.23	25,173.27	5,183.42	11,877.55
9	42,262.18	25,190.25	5,193.80	11,878.13
10	42,251.93	25,189.08	5,199.08	11,863.77
11	42,266.62	25,195.67	5,200.65	11,870.30
12	42,248.37	25,220.80	5,183.73	11,843.83
13	42,280.80	25,220.43	5,195.97	11,864.40
14	42,257.30	25,172.52	5,199.08	11,885.70
Average	42,249.90	25,186.14	5,193.83	11,869.93


Repeatability 1 IOPS - I/O Request Throughput Distribution Graph

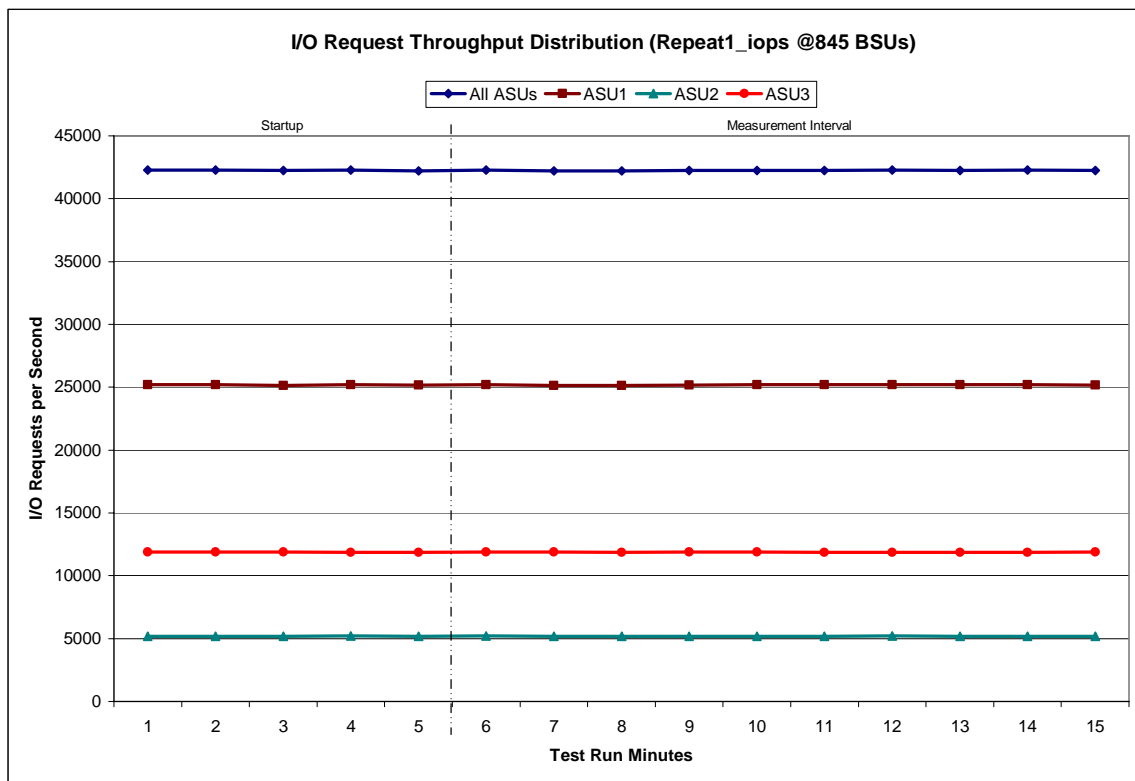

Repeatability 1 IOPS –Average Response Time (ms) Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:15:25	19:20:26	0-4	0:05:01
<i>Measurement Interval</i>	19:20:26	19:30:26	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	20.66	20.90	26.11	17.78
1	16.14	16.46	21.67	13.07
2	16.45	16.76	22.00	13.36
3	16.46	16.77	22.01	13.35
4	16.12	16.46	21.64	12.98
5	16.30	16.63	21.84	13.16
6	16.13	16.47	21.66	12.98
7	16.17	16.50	21.70	13.05
8	16.23	16.56	21.75	13.11
9	16.04	16.38	21.64	12.87
10	16.20	16.54	21.69	13.07
11	16.41	16.72	22.02	13.27
12	16.19	16.52	21.65	13.07
13	16.36	16.68	21.95	13.21
14	16.32	16.65	21.82	13.22
Average	16.23	16.57	21.78	13.10


Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph

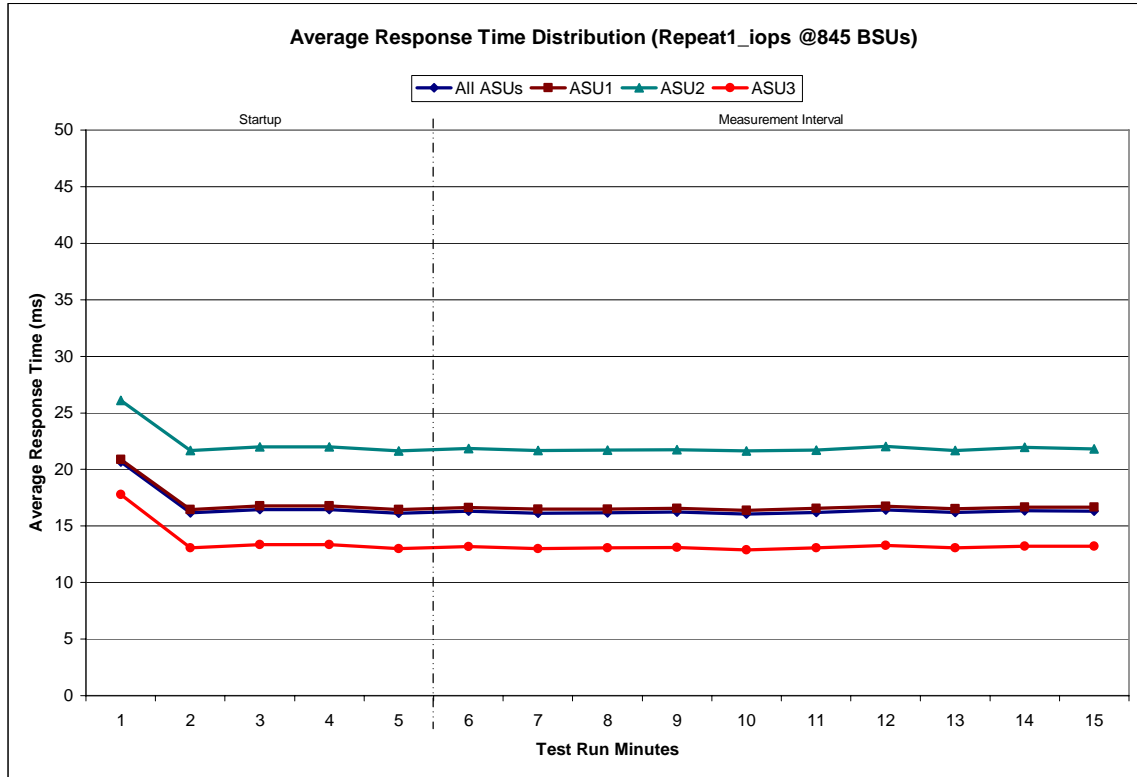

Repeatability 2 LRT - I/O Request Throughput Distribution Data

84 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:30:49	19:35:49	0-4	0:05:00
<i>Measurement Interval</i>	19:35:49	19:45:49	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	4,196.40	2,493.87	513.45	1,189.08
1	4,212.82	2,514.67	517.97	1,180.18
2	4,214.77	2,508.67	517.65	1,188.45
3	4,206.68	2,508.83	515.72	1,182.13
4	4,203.22	2,508.20	517.90	1,177.12
5	4,210.15	2,513.88	518.33	1,177.93
6	4,203.53	2,506.12	511.97	1,185.45
7	4,205.05	2,508.58	518.98	1,177.48
8	4,195.25	2,504.52	509.18	1,181.55
9	4,202.35	2,498.93	517.28	1,186.13
10	4,207.83	2,506.77	518.32	1,182.75
11	4,203.38	2,498.12	525.02	1,180.25
12	4,206.52	2,509.00	519.07	1,178.45
13	4,208.77	2,511.70	516.28	1,180.78
14	4,201.80	2,511.77	515.00	1,175.03
Average	4,204.46	2,506.94	516.94	1,180.58


Repeatability 2 LRT - I/O Request Throughput Distribution Graph

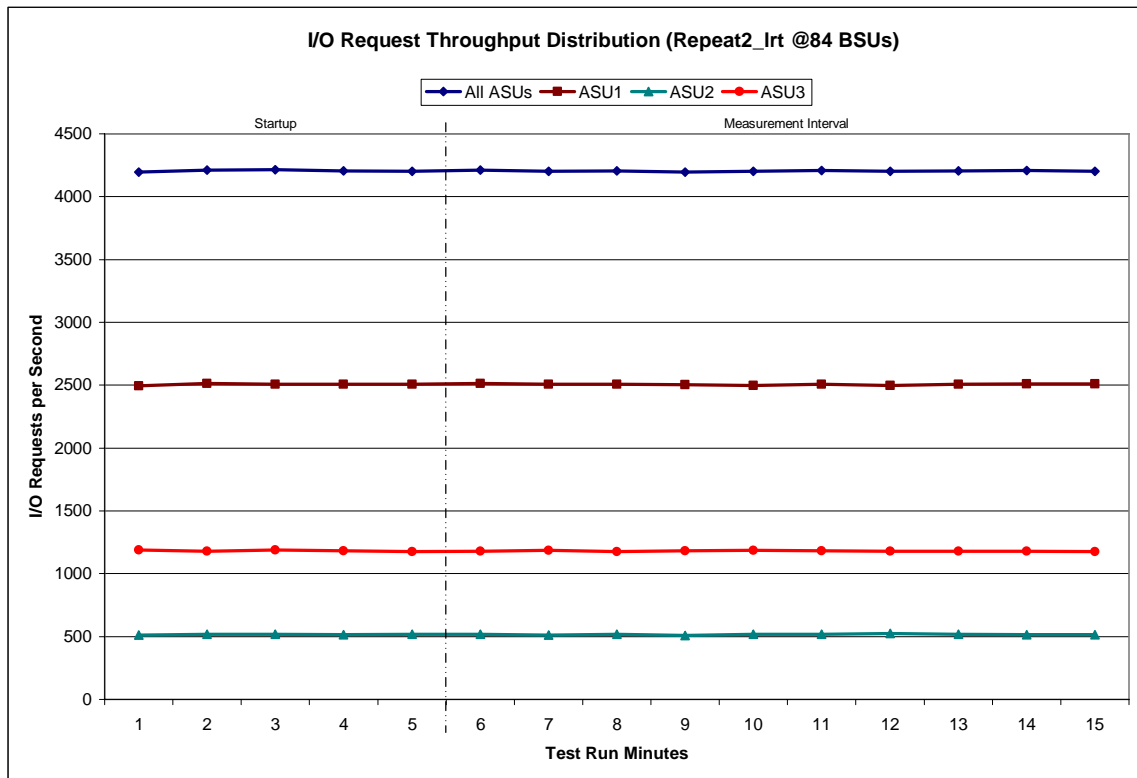

Repeatability 2 LRT –Average Response Time (ms) Distribution Data

84 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:30:49	19:35:49	0-4	0:05:00
<i>Measurement Interval</i>	19:35:49	19:45:49	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.05	2.69	2.65	0.46
1	2.13	2.76	2.73	0.50
2	2.13	2.77	2.74	0.50
3	2.13	2.76	2.76	0.51
4	2.12	2.75	2.74	0.50
5	2.13	2.76	2.80	0.50
6	2.11	2.75	2.73	0.50
7	2.13	2.77	2.74	0.51
8	2.13	2.77	2.73	0.50
9	2.11	2.76	2.70	0.50
10	2.12	2.75	2.76	0.50
11	2.13	2.77	2.74	0.50
12	2.13	2.77	2.73	0.50
13	2.17	2.83	2.75	0.52
14	2.34	3.05	3.09	0.50
Average	2.15	2.80	2.78	0.50


Repeatability 2 LRT –Average Response Time (ms) Distribution Graph

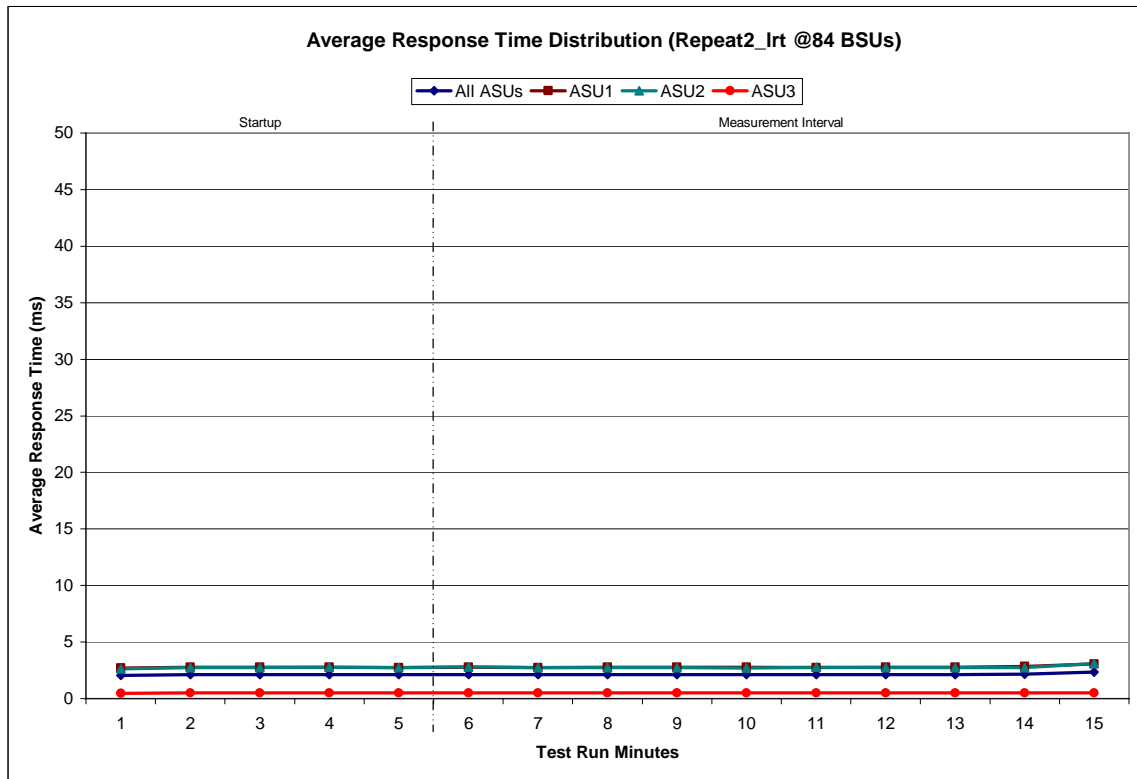

Repeatability 2 IOPS - I/O Request Throughput Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:46:08	19:51:09	0-4	0:05:01
<i>Measurement Interval</i>	19:51:09	20:01:09	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	42,273.32	25,193.63	5,210.87	11,868.82
1	42,226.05	25,184.88	5,177.68	11,863.48
2	42,237.38	25,176.25	5,190.30	11,870.83
3	42,242.60	25,164.63	5,189.72	11,888.25
4	42,290.40	25,235.90	5,185.95	11,868.55
5	42,222.03	25,189.35	5,186.40	11,846.28
6	42,296.47	25,192.57	5,213.32	11,890.58
7	42,231.95	25,164.62	5,186.10	11,881.23
8	42,244.70	25,180.63	5,193.02	11,871.05
9	42,258.02	25,192.27	5,195.72	11,870.03
10	42,252.68	25,180.87	5,206.53	11,865.28
11	42,258.47	25,199.53	5,190.13	11,868.80
12	42,222.68	25,146.60	5,201.48	11,874.60
13	42,270.03	25,205.55	5,199.45	11,865.03
14	42,221.07	25,154.77	5,197.28	11,869.02
Average	42,247.81	25,180.68	5,196.94	11,870.19


Repeatability 2 IOPS - I/O Request Throughput Distribution Graph

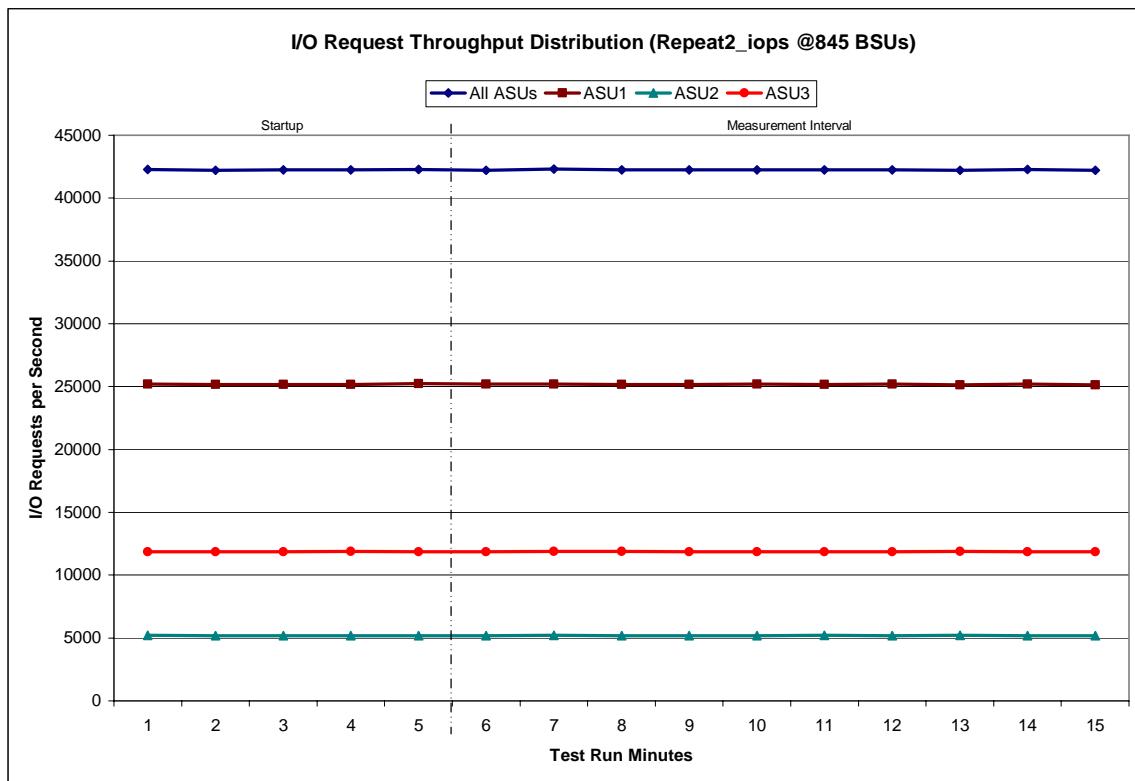

Repeatability 2 IOPS –Average Response Time (ms) Distribution Data

845 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:46:08	19:51:09	0-4	0:05:01
<i>Measurement Interval</i>	19:51:09	20:01:09	5-14	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	19.34	19.54	24.82	16.50
1	16.37	16.68	21.98	13.26
2	15.99	16.34	21.41	12.85
3	17.09	17.38	22.83	13.98
4	16.38	16.72	22.05	13.19
5	16.00	16.37	21.40	12.85
6	16.59	16.88	22.14	13.54
7	16.36	16.70	21.93	13.21
8	16.25	16.58	21.79	13.13
9	16.73	17.02	22.32	13.65
10	16.37	16.73	21.91	13.18
11	16.28	16.64	21.95	13.06
12	16.43	16.77	22.01	13.26
13	16.17	16.54	21.76	12.95
14	16.43	16.75	21.95	13.35
Average	16.36	16.70	21.92	13.22

Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph

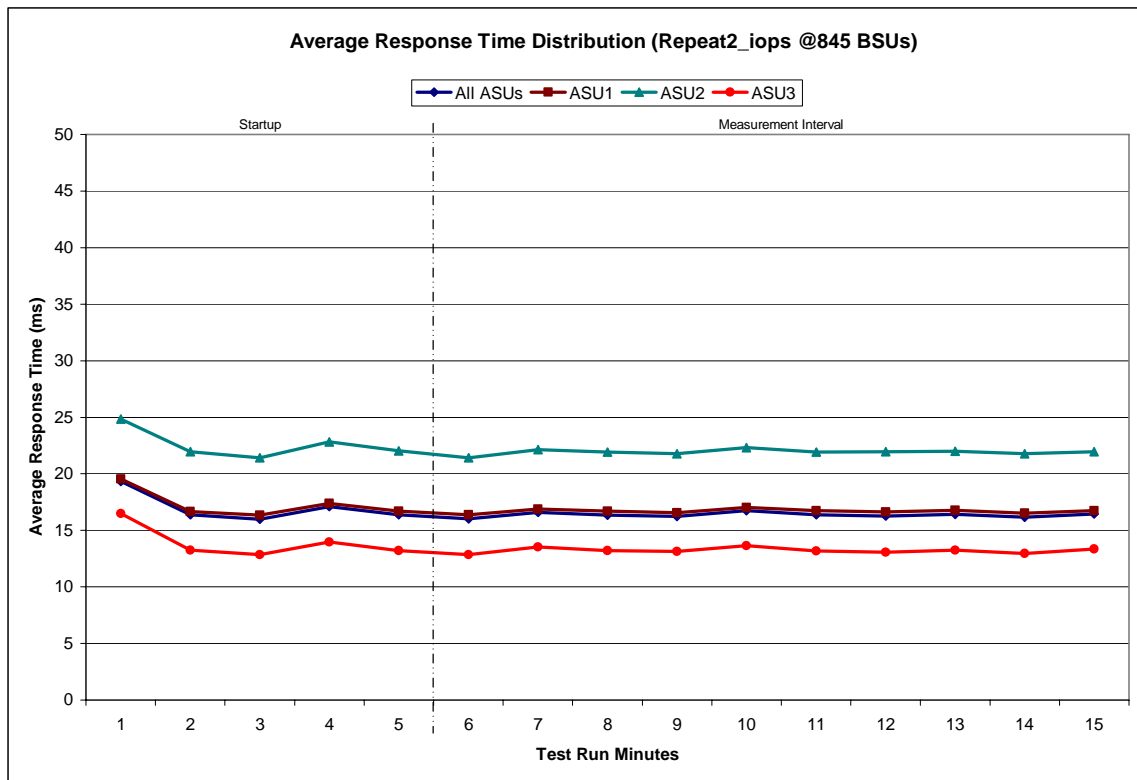

Repeatability 1 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2808	0.0701	0.2100	0.0179	0.0701	0.0350	0.2811
COV	0.006	0.002	0.006	0.003	0.013	0.006	0.009	0.004

Clause 3.4.3

IM - Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.0 and 5.3.13.2

MIM - Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.13.3

COV - Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

Repeatability 1 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2811	0.0700	0.2100	0.0180	0.0699	0.0350	0.2809
COV	0.003	0.001	0.002	0.002	0.005	0.003	0.004	0.001

Repeatability 2 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2811	0.0700	0.2102	0.0180	0.0703	0.0347	0.2808
COV	0.014	0.003	0.005	0.003	0.011	0.009	0.012	0.003

Repeatability 2 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<i>IM</i>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.005	0.001	0.002	0.001	0.004	0.002	0.004	0.001

Data Persistence Test

Clause 6

The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

The SPC-1 Workload Generator will write 16 block I/O requests at random over the total Addressable Storage Capacity of the TSC for ten (10) minutes at a minimum of 25% of the load used to generate the SPC-1 IOP™ primary metric. The bit pattern selected to be written to each block as well as the address of the block will be retained in a log file.

The Benchmark Configuration will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.

The SPC-1 Workload Generator will then use the above log file to verify each block written contains the correct bit pattern.

Clause 9.2.4.8

The following content shall appear in this section of the FDR:

1. *A listing or screen image of all input parameters supplied to the Workload Generator.*
2. *For the successful Data Persistence Test Run, a table illustrating key results. The content, appearance, and format of this table are specified in Table 9-12. Information displayed in this table shall be obtained from the Test Run Results File referenced below in #3.*
3. *For the successful Data Persistence Test Run, the human readable Test Run Results File produced by the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Persistence Test Run 1 and Persistence Test Run 2 are listed below.

```
java -Xms512m -Xmx512m persist1 -b 845
```

```
java -Xms512m -Xmx512m persist2
```

Data Persistence Test Results File

A link to each test result file generated from each Data Persistence Test is listed below.

[Persistence 1 Test Results File](#)

[Persistence 2 Test Results File](#)

Data Persistence Test Results

Data Persistence Test Results	
Data Persistence Test Run Number: 1	
Total Number of Logical Blocks Written	48,807,872
Total Number of Logical Blocks Verified	44,089,264
Total Number of Logical Blocks that Failed Verification	0
Time Duration for Writing Test Logical Blocks	10 minutes
Size in Bytes of each Logical Block	512
Number of Failed I/O Requests in the process of the Test	0

In some cases the same address was the target of multiple writes, which resulted in more Logical Blocks Written than Logical Blocks Verified. In the case of multiple writes to the same address, the pattern written and verified must be associated with the last write to that address.

PRICED STORAGE CONFIGURATION AVAILABILITY DATE

Clause 9.2.4.9

The committed delivery data for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date must be the date at which all components are committed to be available.

The FDR shall state: "The Priced Storage Configuration, as documented in this Full Disclosure Report will be available for shipment to customers on MMMM DD, YYYY." Where Priced Storage Configuration is the TSC Configuration Name as described in Clause 9.2.4.3.3 and MMMM is the alphanumeric month, DD is the numeric day, and YYYY is the numeric year of the date that the Priced Storage Configuration, as documented, is available for shipment to customers as described above.

The IBM TotalStorage® DS4800, as documented in this Full Disclosure Report will become available for customer purchase and shipment on June 17, 2005.

PRICING INFORMATION

Clause 9.2.4.11

A statement of the respective calculations for pricing must be included.

Clause 9.2.4.11.3

A list of all differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration must be included.

Pricing information may found in the Tested Storage Configuration Pricing section on page 13. A list of all differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration may be found in the Executive Summary portion of this document on page 13.

ANOMALIES OR IRREGULARITIES

Clause 9.2.4.10

The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-1 benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in this FDR.

There were no anomalies or irregularities encountered during the SPC-1 Remote Audit of the IBM TotalStorage® DS4800.

APPENDIX A: CUSTOMER TUNABLE PARAMETERS AND OPTIONS

Windows 2000 Registry Changes

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
ql2300\Device\MaximumSGList=0xff

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
ql2300\Device\NumberOfRequests=0xfe

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
Disk\TimeOutValue=0x78

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
ql2300\Device\DriverParameters=UseSameNN=1;BusChange=0;

Storage Array Cache Flush Settings

Start Flush: changed from default of 80 to new value of 50

Stop Flush: changed from default of 80 to new value of 50

RDAC Failover Options

Host Region	Offset	Default	New Value
3	0x24	1	0
9	0x24	1	0
10	0x24	1	0
11	0x24	1	0
12	0x24	1	0
13	0x24	1	0
14	0x24	1	0

Host Bus Adapter Options

The table below lists the Host Bus Adapter BIOS options that were changed from their default values.

Host Bus Adapter Settings		
Item	Default	New Value
Adapter Settings:		
Loop Reset Delay	5	8
Adapter Hard Loop ID	Disabled	Enabled
Hard Loop ID (unique for each)	0	Eg. 22
Fibre Channel Tape Support	Enabled	Disabled
Advanced Adapter Settings:		
Execution Throttle	16	255
LUNs per Target	8	0
Login Retry Count	8	30
Port Down Retry Count	8	70
Link Down Timeout	30	60

APPENDIX B: TESTED STORAGE CONFIGURATION (TSC) CREATION

The storage management utility, SANtricity, was used to create eight volume groups on the storage subsystem, each volume group contains a single volume. The SANtricity script is listed below. These eight volumes are visible by each of the attached hosts. There are four hosts used in this benchmark. One host is the “master”, and is not configured to issue IO to the storage subsystem. The other three “slave” hosts, configured with three JVM's each, perform the IO for the benchmark. The steps that follow are required to define the Windows partitions, volumes, and stripe sets that will be used by the SPC-1 benchmark. Steps 1-8 below are performed on only one of the hosts

- (1) Use diskpar.exe to set the starting offset for each of the storage system volumes. Starting offset is 65536. Use all of the remaining capacity in the partition.
- (2) Start Windows Disk Administrator.
- (3) Convert all of the storage system volumes to Dynamic Disks.
- (4) Create a Windows Striped (RAID 0) volume using all eight 32MB volumes.
- (5) Delete the large volume on each of the Dynamic Disks.
- (6) Create a Windows Striped (RAID 0) volume for ASU 3.
 - a. Select all eight volumes.
 - b. Set capacity to 81910MB.
 - c. Assign drive letter “N” to the volume. Do not format the volume.
- (7) Create the Windows Striped (RAID0) volume for ASU 1.
 - a. Select all eight volumes.
 - b. Set capacity to 368595MB.
 - c. Assign drive letter “L” to the volume. Do not format the volume.
- (8) Create the Windows Striped (RAID 0) volume for ASU 2.
 - a. Select all eight volumes.
 - b. Set capacity to 368595MB.
 - c. Assign drive letter “M” to the volume. Do not format the volume.
- (9) Reboot all four host systems.
- (10) After reboot completes, start Disk Administrator on each of the host systems.
- (11) Import foreign disks, or reactive the Windows stripe sets as necessary. On each host, assign drive letters to the stripe sets as they were assigned in steps 6, 7, and 8.

SANtricity Volume Creation Script

```
set controller[b] mode = Active;

create volume drives[ 10,1 10,2 30,1 30,2 10,3 10,4 30,3 30,4 10,5 30,5 10,6
30,6 10,7 10,8
30,7 30,8 10,9 10,10 30,9 30,10 10,11 10,12 30,11 30,12 10,13
10,14 30,13 30,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_0"
capacity=899gb
owner = A;
create volume drives[ 11,1 11,2 31,1 31,2 11,3 11,4 31,3 31,4 11,5 11,6 31,5
31,6 11,7 11,8
31,7 31,8 11,9 11,10 31,9 31,10 11,11 11,12 31,11 31,12 11,13
11,14 31,13 31,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_1"
capacity=899gb
owner = A;
create volume drives[ 12,1 12,2 32,1 32,2 12,3 12,4 32,3 32,4 12,5 12,6 32,5
32,6 12,7 12,8
32,7 32,8 12,9 12,10 32,9 32,10 12,11 12,12 32,11 32,12 12,13
12,14 32,13 32,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_2"
capacity=899gb
owner = A;
create volume drives[ 13,1 13,2 33,1 33,2 13,3 13,4 33,3 33,4 13,5 13,6 33,5
33,6 13,7 13,8
33,7 33,8 13,9 13,10 33,9 33,10 13,11 13,12 33,11 33,12 13,13
13,14 33,13 33,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_3"
capacity=899gb
owner = A;
create volume drives[ 20,1 20,2 40,1 40,2 20,3 20,4 40,3 40,4 20,5 20,6 40,5
40,6 20,7 20,8
40,7 40,8 20,9 20,10 40,9 40,10 20,11 20,12 40,11 40,12 20,13
20,14 40,13 40,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_4"
capacity=899gb
owner = b;
create volume drives[ 21,1 21,2 41,1 41,2 21,3 21,4 41,3 41,4 21,5 21,6 41,5
41,6 21,7 21,8
41,7 41,8 21,9 21,10 41,9 41,10 21,11 21,12 41,11 41,12 21,13
21,14 41,13 41,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_5"
capacity=899gb
owner = b;
create volume drives[ 22,1 22,2 42,1 42,2 22,3 22,4 42,3 42,4 22,5 22,6 42,5
42,6 22,7 22,8
```

```

                42,7 42,8 22,9 22,10 42,9 42,10 22,11 22,12 42,11 42,12 22,13
22,14 42,13 42,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_6"
capacity=899gb
owner = b;
create volume drives[ 23,1 23,2 43,1 43,2 23,3 23,4 43,3 43,4 23,5 23,6 43,5
43,6 23,7 23,8
                43,7 43,8 23,9 23,10 43,9 43,10 23,11 23,12 43,11 43,12 23,13
23,14 43,13 43,14 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_7"
capacity=899gb
owner = b;

set volume["LUN_0"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_1"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_2"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_3"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_4"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_5"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_6"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;
set volume["LUN_7"] mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = True readAheadMultiplier = 0;

set storageArray cacheBlockSize = 4;
set storageArray cacheFlushStart = 50 cacheFlushStop = 50;

set storageArray defaultHostType = "Windows 2000/Server 2003 Non-Clustered";

set controller[a] HostNVS RAMByte[0x01, 0x17]=0x01;
set controller[b] HostNVS RAMByte[0x01, 0x17]=0x01;

/* Setup for RDAC failover environment */

set controller[a] HostNVS RAMByte[0x00, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x01, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x02, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x03, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x04, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x05, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x06, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x07, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x08, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x09, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0a, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0b, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0c, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0d, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0e, 0x24]=0x00;
set controller[a] HostNVS RAMByte[0x0f, 0x24]=0x00;

set controller[b] HostNVS RAMByte[0x00, 0x24]=0x00;
set controller[b] HostNVS RAMByte[0x01, 0x24]=0x00;
```

**APPENDIX B:
TESTED STORAGE CONFIGURATION (TSC) CREATION**

```
set controller[b] HostNVS RAMByte[0x02, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x03, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x04, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x05, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x06, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x07, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x08, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x09, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0a, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0b, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0c, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0d, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0e, 0x24]=0x00;  
set controller[b] HostNVS RAMByte[0x0f, 0x24]=0x00;
```

APPENDIX C: SPC-1 WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETERS

The contents of the SPC-1 Workload Generator command and parameter file is listed below.

Master Host System

```
* spc1.cfg

host=master
slaves=(bm2650i_s1,bm2650i_s2,bm2650i_s3,bm2650n_s1,bm2650n_s2,bm2650n_s3,bm
2650o_s1,bm2650o_s2,bm2650o_s3)

javaparms="-Xmx256m -Xms256m"

sd=asu1_1,lun=\\.\\L:,size=3091998965760
sd=asu2_1,lun=\\.\\M:,size=3091998965760
sd=asu3_1,lun=\\.\\N:,size=687110881280

eof
```

Slave Host Systems

One of the SPC-1 Workload Generator command and parameter files is listed below. The files were identical for each slave system with the exception of the "host=" value, which varied dependent upon the system.

```
*slavel.parm

host=bm2650i_s1
master=bm2650j

sd=asu1_1,lun=\\.\\L:,size=3091998965760
sd=asu2_1,lun=\\.\\M:,size=3091998965760
sd=asu3_1,lun=\\.\\N:,size=687110881280

eof
```