



**SPC BENCHMARK 1™
FULL DISCLOSURE REPORT**

**NETAPP, INC.
NETAPP EF560 STORAGE SYSTEM**

SPC-1 V1.14

Submitted for Review: January 27, 2015

Submission Identifier: A00152

First Edition – January 2015

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by NetApp, Inc. for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. NetApp, Inc. may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local NetApp, Inc. representative for information on products and services available in your area.

© Copyright NetApp, Inc. 2015. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

SPC Benchmark-1, SPC-1, SPC-1 IOPS, SPC-1 LRT and SPC-1 Price-Performance are trademarks of the Storage Performance Council. NetApp, ONTAP and the NetApp logo are trademarks or registered trademarks of NetApp, Inc. in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

Table of Contents

Audit Certification	vii
Audit Certification (cont.)	viii
Letter of Good Faith	ix
Executive Summary	10
Test Sponsor and Contact Information	10
Revision Information and Key Dates	10
Tested Storage Product (TSP) Description	10
Summary of Results	11
Storage Capacities, Relationships, and Utilization	12
Response Time – Throughput Curve	15
Response Time – Throughput Data	15
Priced Storage Configuration Pricing	16
Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration	16
Priced Storage Configuration Diagram	17
Priced Storage Configuration Components	17
Configuration Information	18
Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram	18
Host System(s) and Tested Storage Configuration (TSC) Table of Components	18
Storage Network Configuration	18
Benchmark Configuration/Tested Storage Configuration Diagram	19
Host System and Tested Storage Configuration Components	20
Customer Tunable Parameters and Options	21
Tested Storage Configuration (TSC) Description	21
SPC-1 Workload Generator Storage Configuration	21
ASU Pre-Fill	22
SPC-1 Data Repository	23
Storage Capacities and Relationships	23
SPC-1 Storage Capacities	23
SPC-1 Storage Hierarchy Ratios	24
SPC-1 Storage Capacity Charts	24
Storage Capacity Utilization	26
Logical Volume Capacity and ASU Mapping	27
SPC-1 Benchmark Execution Results	28
SPC-1 Tests, Test Phases, and Test Runs	28

“Ramp-Up” Test Runs	29
Primary Metrics Test – Sustainability Test Phase	29
SPC-1 Workload Generator Input Parameters	30
Sustainability Test Results File	30
Sustainability – Data Rate Distribution Data (MB/second)	30
Sustainability – Data Rate Distribution Graph	30
Sustainability – I/O Request Throughput Distribution Data	31
Sustainability – I/O Request Throughput Distribution Graph	31
Sustainability – Average Response Time (ms) Distribution Data	32
Sustainability – Average Response Time (ms) Distribution Graph	32
Sustainability – Response Time Frequency Distribution Data	33
Sustainability – Response Time Frequency Distribution Graph	33
Sustainability – Measured Intensity Multiplier and Coefficient of Variation.....	34
Primary Metrics Test – IOPS Test Phase	35
SPC-1 Workload Generator Input Parameters	35
IOPS Test Results File.....	35
IOPS Test Run – I/O Request Throughput Distribution Data	36
IOPS Test Run – I/O Request Throughput Distribution Graph.....	37
IOPS Test Run – Average Response Time (ms) Distribution Data	38
IOPS Test Run – Average Response Time (ms) Distribution Graph	39
IOPS Test Run –Response Time Frequency Distribution Data	40
IOPS Test Run –Response Time Frequency Distribution Graph.....	40
IOPS Test Run – I/O Request Information.....	41
IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation	41
Primary Metrics Test – Response Time Ramp Test Phase	42
SPC-1 Workload Generator Input Parameters	42
Response Time Ramp Test Results File.....	42
Response Time Ramp Distribution (IOPS) Data.....	43
Response Time Ramp Distribution (IOPS) Data (<i>continued</i>)	44
Response Time Ramp Distribution (IOPS) Graph	44
SPC-1 LRT™ Average Response Time (ms) Distribution Data.....	45
SPC-1 LRT™ Average Response Time (ms) Distribution Graph	46
SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation	47
Repeatability Test	48
SPC-1 Workload Generator Input Parameters	48
Repeatability Test Results File	49
Repeatability 1 LRT – I/O Request Throughput Distribution Data.....	50
Repeatability 1 LRT – I/O Request Throughput Distribution Graph	51
Repeatability 1 LRT –Average Response Time (ms) Distribution Data	52

Repeatability 1 LRT –Average Response Time (ms) Distribution Graph.....	53
Repeatability 1 IOPS – I/O Request Throughput Distribution Data	54
Repeatability 1 IOPS – I/O Request Throughput Distribution Graph.....	55
Repeatability 1 IOPS –Average Response Time (ms) Distribution Data.....	56
Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph	57
Repeatability 2 LRT – I/O Request Throughput Distribution Data.....	58
Repeatability 2 LRT – I/O Request Throughput Distribution Graph	59
Repeatability 2 LRT –Average Response Time (ms) Distribution Data	60
Repeatability 2 LRT –Average Response Time (ms) Distribution Graph.....	61
Repeatability 2 IOPS – I/O Request Throughput Distribution Data	62
Repeatability 2 IOPS – I/O Request Throughput Distribution Graph.....	63
Repeatability 2 IOPS –Average Response Time (ms) Distribution Data.....	64
Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph	65
Repeatability 1 (LRT) Measured Intensity Multiplier and Coefficient of Variation	66
Repeatability 1 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	66
Repeatability 2 (LRT) Measured Intensity Multiplier and Coefficient of Variation	66
Repeatability 2 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	67
Data Persistence Test.....	68
SPC-1 Workload Generator Input Parameters	68
Data Persistence Test Results File	68
Data Persistence Test Results.....	69
Priced Storage Configuration Availability Date.....	70
Pricing Information.....	70
Tested Storage Configuration (TSC) and Priced Storage Configuration Differences.....	70
Anomalies or Irregularities	70
Appendix A: SPC-1 Glossary	71
“Decimal” (<i>powers of ten</i>) Measurement Units.....	71
“Binary” (<i>powers of two</i>) Measurement Units.....	71
SPC-1 Data Repository Definitions.....	71
SPC-1 Data Protection Levels	72
SPC-1 Test Execution Definitions	72
I/O Completion Types	74
SPC-1 Test Run Components.....	74
Appendix B: Customer Tunable Parameters and Options.....	75
HBA Parameters.....	75
Windows Registry Settings	75

Appendix C: Tested Storage Configuration (TSC) Creation	76
QLogic HBA Parameters.....	76
Windows Registry Settings	76
Storage Array Volume Creation	76
SPC-1 Logical Volume Creation.....	77
SPC1_RAID_Config.script	78
Appendix D: SPC-1 Workload Generator Storage Commands and Parameters	79
ASU Pre-Fill.....	79
Primary Metrics and Repeatability Tests	79
SPC-1 Persistence Test Run 1.....	80
Slave JVMs.....	80
SPC-2 Persistence Test.....	81
SPC-2 Persistence Test Run 1 (<i>write phase</i>).....	81
SPC-2 Persistence Test Run 2 (<i>read phase</i>).....	81
Appendix E: SPC-1 Workload Generator Input Parameters	82
phase1_cmd.....	82
startSlaves.cmd.....	83
slave1.cmd	83
phase2_cmd.....	83
Appendix F: Third-Party Quotation.....	84
QLogic QLE2672-CK HBA's	84
Fibre Channel Cables.....	85

AUDIT CERTIFICATION



Mark Register
 NetApp, Inc.
 3718 North Rock Road
 Wichita, KS 67226

January 25, 2015

The SPC Benchmark 1™ Reported Data listed below for the NetApp EF560 Storage System was produced in compliance with the SPC Benchmark 1™ v1.14 Remote Audit requirements.

SPC Benchmark 1™ v1.14 Reported Data	
Tested Storage Product (TSP) Name: NetApp EF560 Storage System	
Metric	Reported Result
SPC-1 IOPS™	245,011.76
SPC-1 Price-Performance	\$0.54/SPC-1 IOPS™
Total ASU Capacity	4,503.047 GB
Data Protection Level	Protected 2 (<i>Mirroring</i>)
Total Price (including three-year maintenance)	\$133,102.61
Currency Used	U.S. Dollars
Target Country for availability, sales and support	U.S.A.

The following SPC Benchmark 1™ Remote Audit requirements were reviewed and found compliant with 1.14 of the SPC Benchmark 1™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified by information supplied by NetApp, Inc.:
 - ✓ Physical Storage Capacity and requirements.
 - ✓ Configured Storage Capacity and requirements.
 - ✓ Addressable Storage Capacity and requirements.
 - ✓ Capacity of each Logical Volume and requirements.
 - ✓ Capacity of each Application Storage Unit (ASU) and requirements.
- The total Application Storage Unit (ASU) Capacity was filled with random data, using an auditor approved tool, prior to execution of the SPC-1 Tests.
- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).

Storage Performance Council
 643 Bair Island Road, Suite 103
 Redwood City, CA 94062
AuditService@storageperformance.org
 650.556.9384

AUDIT CERTIFICATION (CONT.)

NetApp EF560 Storage System
SPC-1 Audit Certification


Page 2

- Listings and commands to configure the Benchmark Configuration/Tested Storage Configuration, including customer tunable parameters that were changed from default values.
- SPC-1 Workload Generator commands and parameters used for the audited SPC Test Runs.
- The following Host System requirements were verified by information supplied by NetApp, Inc.:
 - ✓ The type of Host Systems including the number of processors and main memory.
 - ✓ The presence and version number of the SPC-1 Workload Generator on each Host System.
 - ✓ The TSC boundary within each Host System.
- The execution of each Test, Test Phase, and Test Run was found compliant with all of the requirements and constraints of Clauses 4, 5, and 11 of the SPC-1 Benchmark Specification.
- The Test Results Files and resultant Summary Results Files received from NetApp, Inc. for each of following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1 Benchmark Specification:
 - ✓ Data Persistence Test
 - ✓ Sustainability Test Phase
 - ✓ IOPS Test Phase
 - ✓ Response Time Ramp Test Phase
 - ✓ Repeatability Test
- There were no differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration.
- The submitted pricing information met all of the requirements and constraints of Clause 8 of the SPC-1 Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 9 of the SPC-1 Benchmark Specification.
- This successfully audited SPC measurement is not subject to an SPC Confidential Review.

Audit Notes:

There were no audit notes or exceptions.

Respectfully,



Walter E. Baker
SPC Auditor

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

LETTER OF GOOD FAITH



NetApp-

[www_netapp.com](http://www.netapp.com)

316 636 8000 Tel

3718 N Rock Road
Wichita, Kansas 67226

December 5, 2014

To: Mr. Walter E. Baker, SPC Auditor
Gradient Systems
643 Bair Island Road, Suite 103
Redwood City, CA 94063-2755

Subject: SPC-1 Letter of Good Faith for the NetApp EF560 Storage System

NetApp Inc. is the test sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1 results and materials we have submitted for that product are complete, accurate, and in full compliance with version 1.14 of the SPC-1 benchmark specification.

Our disclosure of the Benchmark Configuration and execution of the benchmark includes all items that, to the best of our knowledge and belief, materially affect the reported results, regardless of whether such items are explicitly required to be disclosed by the SPC-1 benchmark specification.

Sincerely,

Joel Reich
Senior Vice President, E-Series Product Group

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	NetApp, Inc. – http://www.netapp.com Mark Register – Mark.Register@netapp.com 3718 North Rock Road Wichita, KS 67226 Phone: (316) 636-8340
Test Sponsor Alternate Contact	NetApp, Inc. – http://www.netapp.com Susan Fountain – Susan.Fountain@netapp.com 7301 Kit Creek road, Building 1 Research Triangle Park, NC 27709 Phone: (919) 395-1446
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.14
SPC-1 Workload Generator revision number	V2.3.0
Date Results were first used publicly	January 27, 2015
Date the FDR was submitted to the SPC	January 27, 2015
Date the Priced Storage Configuration is available for shipment to customers	March 23, 2015
Date the TSC completed audit certification	January 25, 2015

Tested Storage Product (TSP) Description

The NetApp® EF560 flash array is an all-SSD storage system that brings together extreme performance and enterprise-grade reliability to create a system optimized for latency-sensitive workloads.

Designed for applications demanding the highest levels of performance, reliability, and availability and requiring just 2U of rack space, the EF560 flash array delivers extreme IOPS, sub millisecond response times, with industry leading bandwidth and enterprise-proven availability features. Additionally, the EF560 can be seamlessly expanded to 120 SSDs to a maximum raw capacity of 192TB.

The EF560's core architecture has been proven in the world's most demanding and complex computing environments. Its field-proven design is the culmination of 20 years of industry knowledge focused on designing enterprise-class storage. The fully redundant EF-Series all-flash array is architected to provide the highest levels of reliability, availability, and data protection.

Summary of Results

SPC-1 Reported Data	
Tested Storage Product (TSP) Name: NetApp EF560 Storage System	
Metric	Reported Result
SPC-1 IOPS™	245,011.76
SPC-1 Price-Performance™	\$0.54/SPC-1 IOPS™
Total ASU Capacity	4,503.047 GB
Data Protection Level	Protected 2 (<i>mirroring</i>)
Total Price	\$133,102.61
Currency Used	U.S. Dollars
Target Country for availability, sales and support	U.S.A.

SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

SPC-1 Price-Performance™ is the ratio of **Total Price** to SPC-1 IOPS™.

Total ASU (Application Storage Unit) **Capacity** represents the total storage capacity available to be read and written in the course of executing the SPC-1 benchmark.

A **Data Protection Level** of **Protected 2** using *Mirroring* configures two or more identical copies of user data.

***Protected 2:** The single point of failure of any **component** in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.*


Total Price includes the cost of the Priced Storage Configuration plus three years of hardware maintenance and software support as detailed on page 16.



Currency Used is formal name for the currency used in calculating the **Total Price** and **SPC-1 Price-Performance™**. That currency may be the local currency of the **Target Country** or the currency of a difference country (*non-local currency*).


The **Target Country** is the country in which the Priced Storage Configuration is available for sale and in which the required hardware maintenance and software support is provided either directly from the Test Sponsor or indirectly via a third-party supplier.

Storage Capacities, Relationships, and Utilization

The following four charts and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

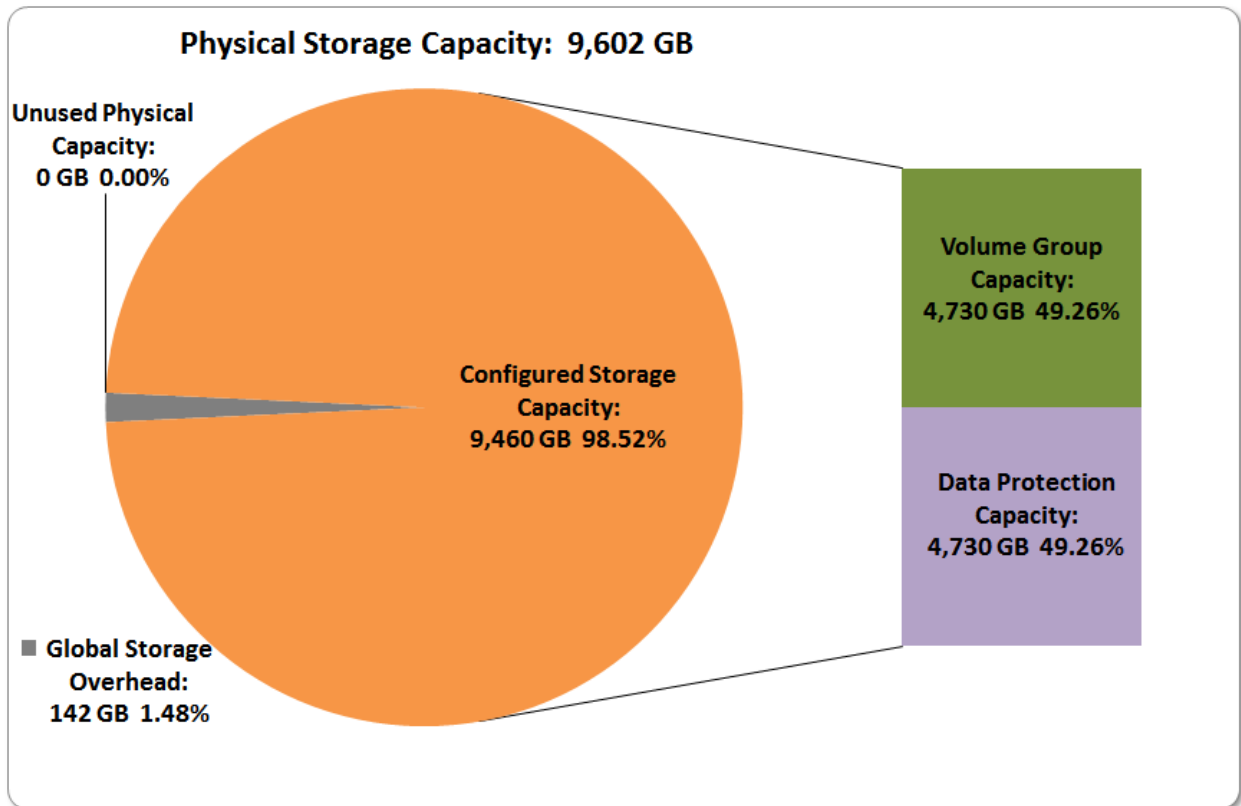

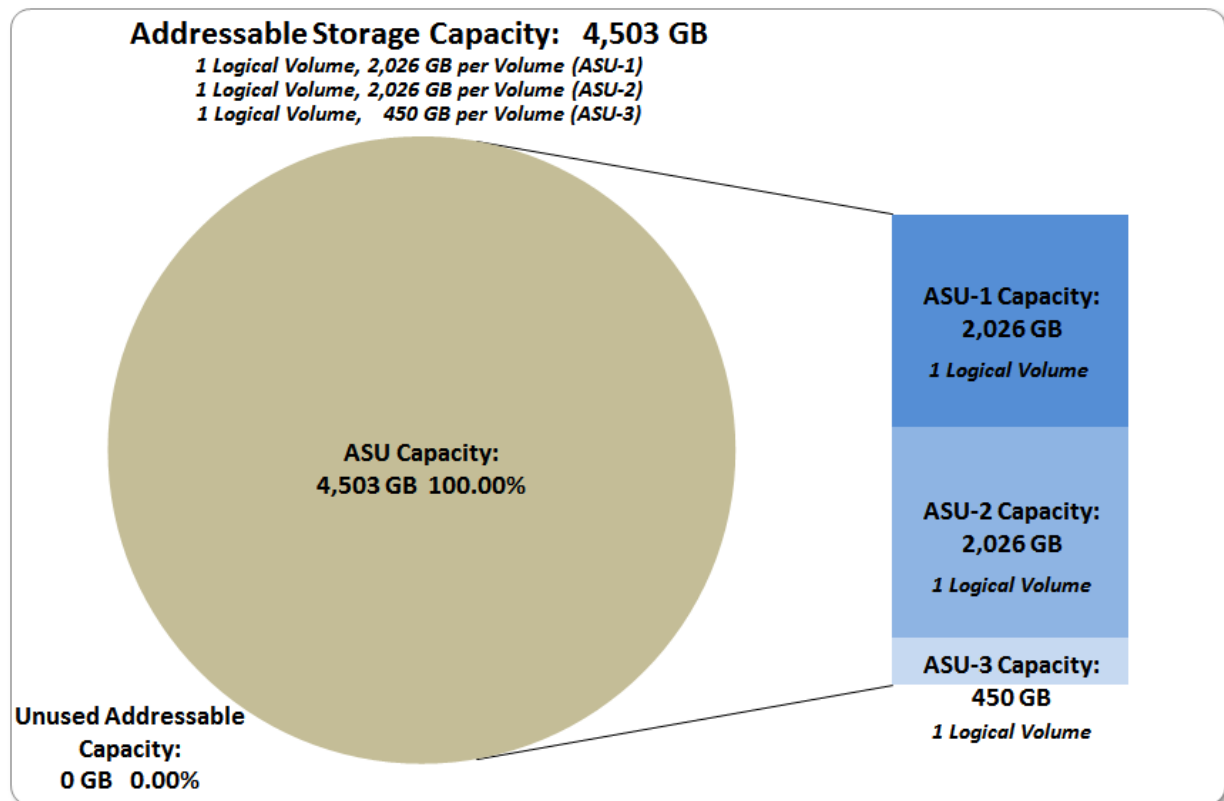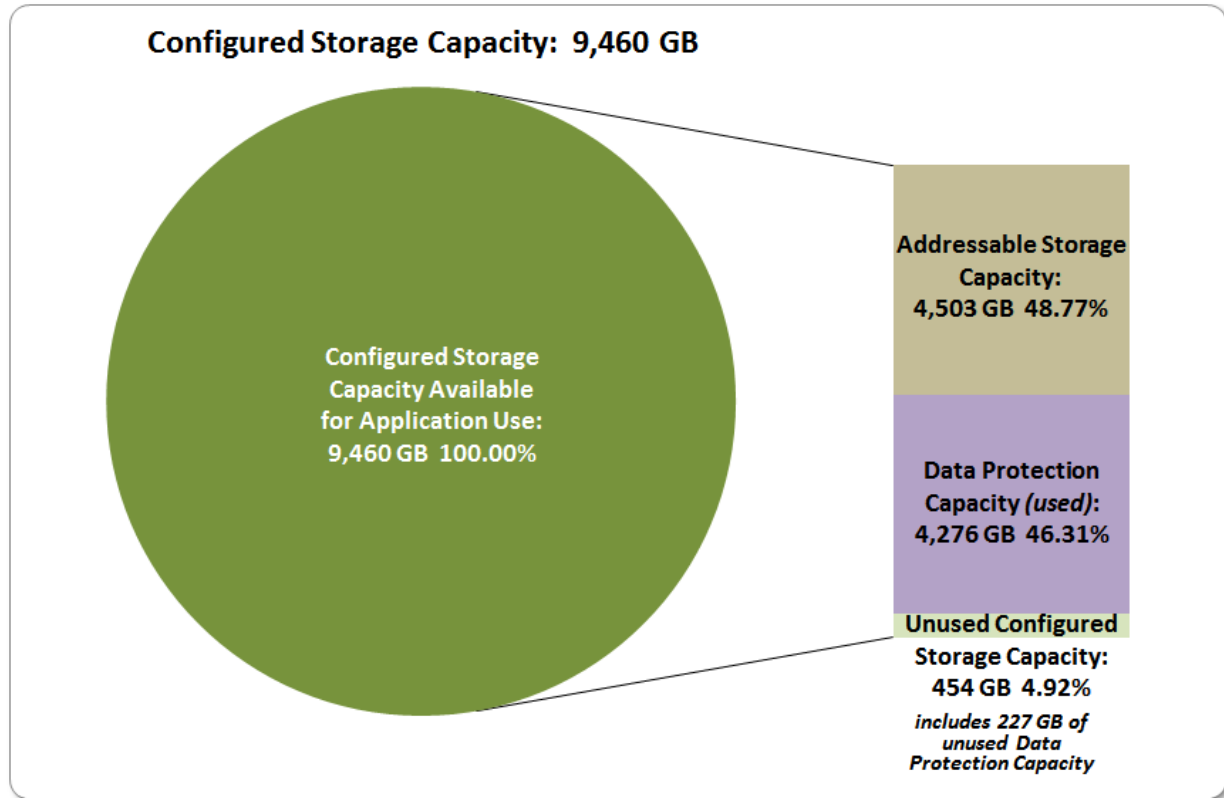

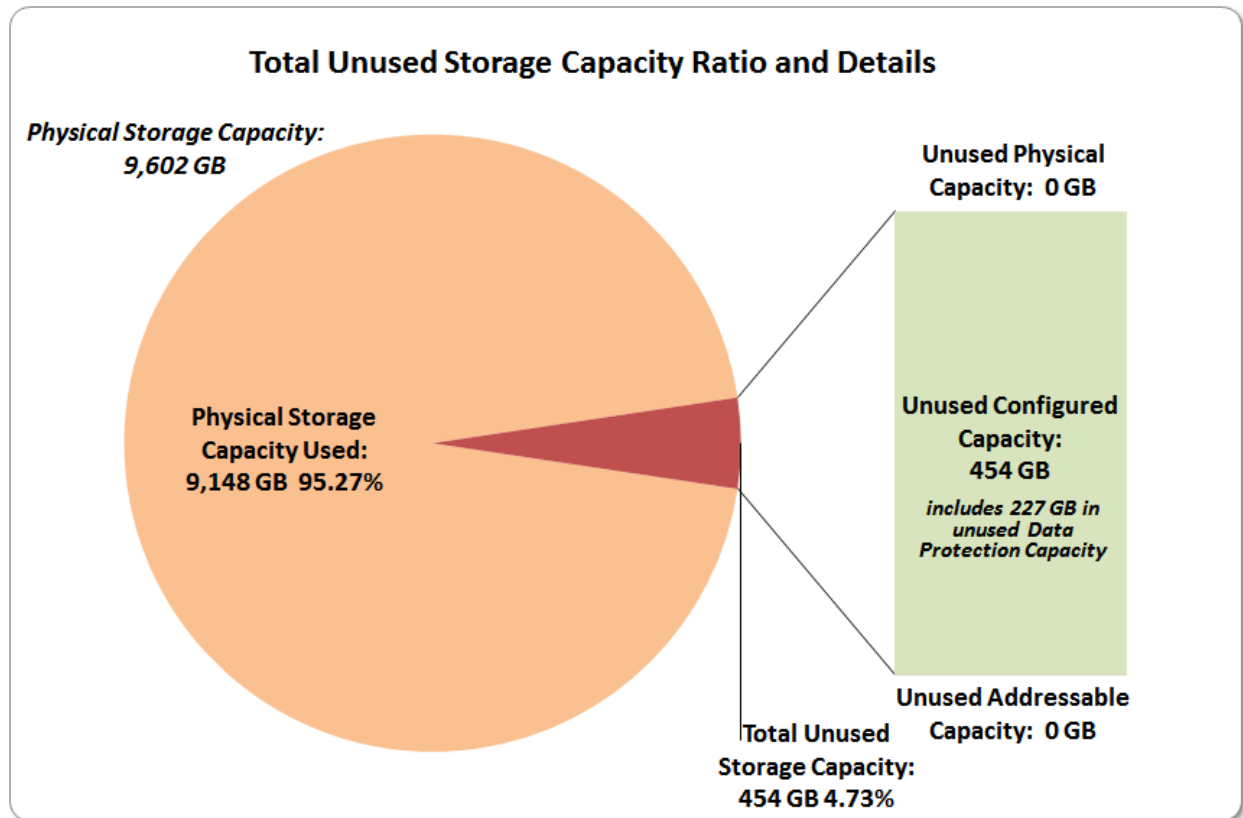

SPC-1 Storage Capacity Utilization	
Application Utilization	49.90%
Protected Application Utilization	93.79%
Unused Storage Ratio	4.73%

Application Utilization: Total ASU Capacity (4,503.047 GB) divided by Physical Storage Capacity (9,602.112 GB).

Protected Application Utilization: Total ASU Capacity (4,503.047 GB) plus total Data Protection Capacity (4,730.192 GB) minus unused Data Protection Capacity (227.146 GB) divided by Physical Storage Capacity (9,602.112 GB).


Unused Storage Ratio: Total Unused Capacity (9,602.112 GB) divided by Physical Storage Capacity (454.065 GB) and may not exceed 45%.

Detailed information for the various storage capacities and utilizations is available on pages 23-24.

Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

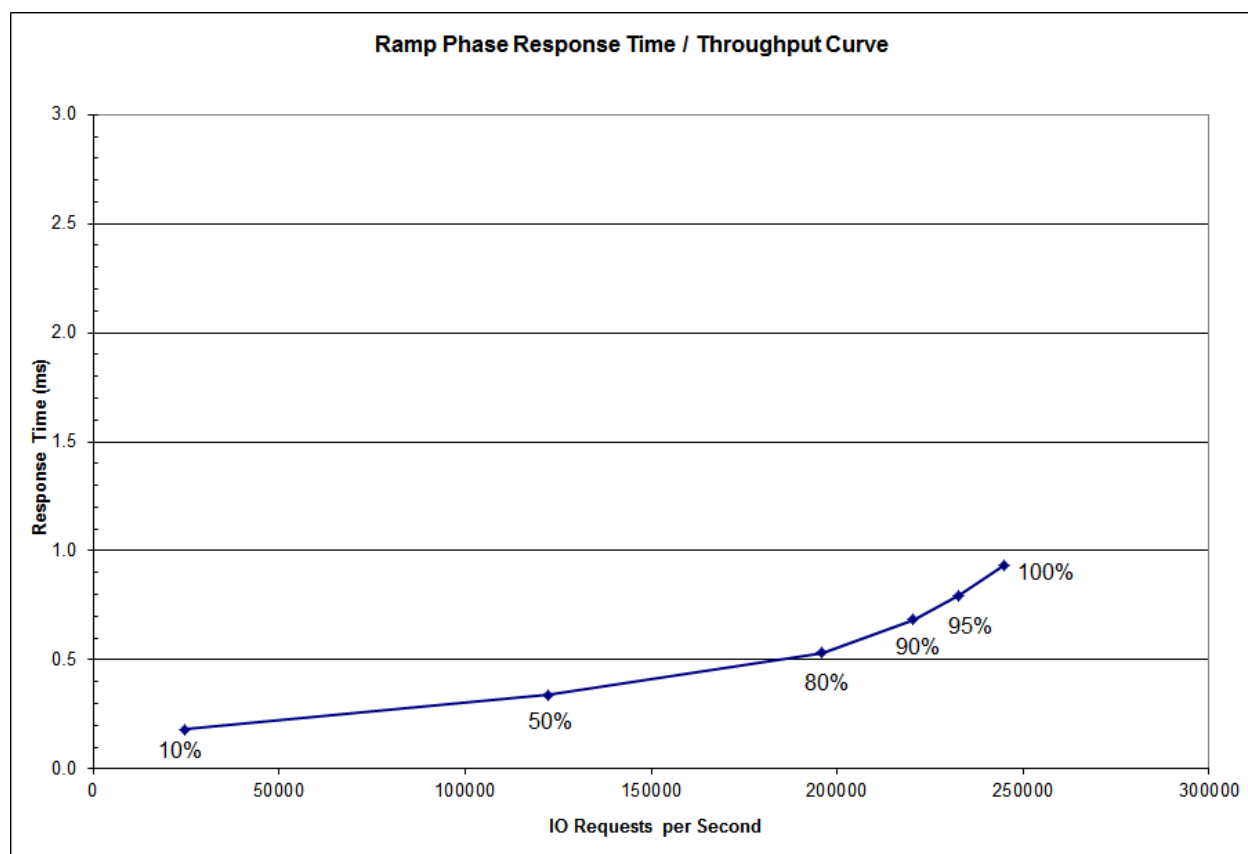

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	24,501.04	122,491.97	196,008.41	220,508.87	232,761.95	245,011.76
Average Response Time (ms):						
All ASUs	0.18	0.34	0.53	0.69	0.79	0.93
ASU-1	0.18	0.35	0.54	0.67	0.77	0.89
ASU-2	0.19	0.35	0.55	0.69	0.78	0.91
ASU-3	0.17	0.32	0.52	0.71	0.86	1.04
Reads	0.23	0.42	0.61	0.71	0.78	0.86
Writes	0.15	0.29	0.49	0.67	0.81	0.98

Priced Storage Configuration Pricing

Part #	Description	Quantity	Unit Price	Extended Price
EF560-0001-R6	EF560, dual controller, 24x400GB SSD non FDE, 8 x 16Gb ports, SFP's, Base	1	115,321.50	115,321.50
CS-A2-4R-VA	Support, 3-yr 24/7, 4 hour on-site	1	10,109.23	10,109.23
CDW 286059	Qlogic QLE2672-CK dual-port 16Gb HBA	4	1,871.99	7,487.96
CDW 1148024	Tripp Lite 2 meter optical cable	8	22.99	183.92
	Total			133,102.61

The above pricing includes hardware maintenance and software support for three years, 7 days per week, 24 hours per day. The hardware maintenance and software support provides the following:


- Acknowledgement of new and existing problems within four (4) hours.
- Onsite presence of a qualified maintenance engineer or provision of a customer replaceable part within four (4) hours of the above acknowledgement for any hardware failure that results in an inoperative Priced Storage Configuration that can be remedied by the repair or replacement of a Priced Storage Configuration component.

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and Priced Storage Configuration.

Priced Storage Configuration Diagram

4 – Qlogic QLE2672 dual-port, 16Gb FC HBAs
8 – 16Gb connections (2 per HBA)

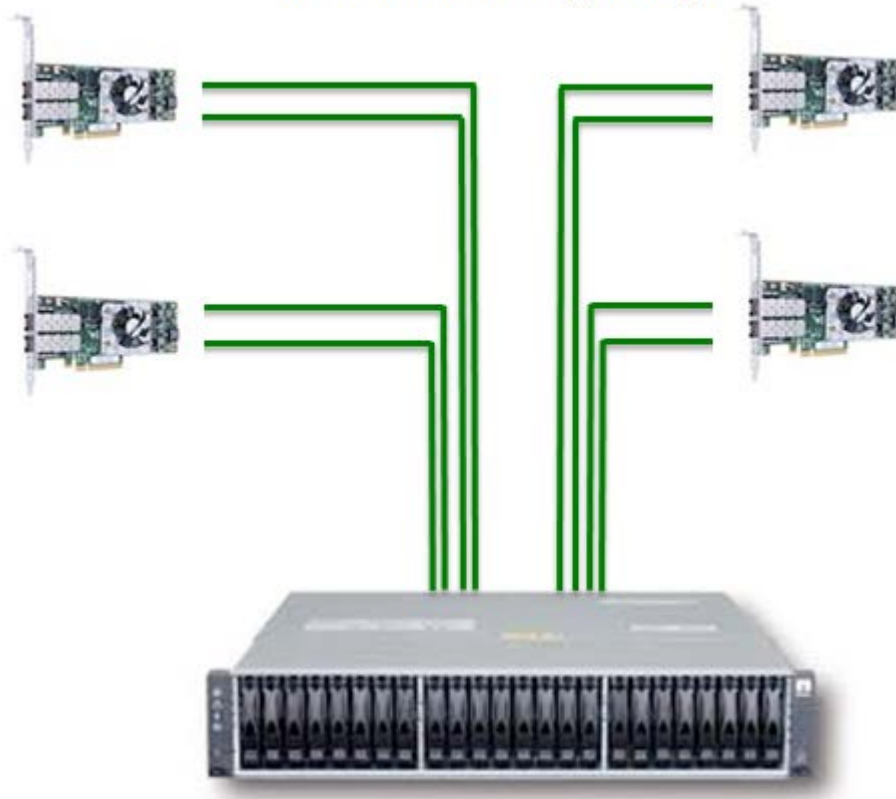

NetApp EF560 Storage System
24 – 400GB SSDs

Priced Storage Configuration Components

Priced Storage Configuration
4 – QLogic QLE2672-CK dual-port, 16Gb, FC HBAs
NetApp EF560 Storage System
1 – Base Enclosure with
2 – controllers, each controller includes:
12 GB cache (24 GB total)
4 – 16 Gb FC front-end connections (8 total)
2 – 4 x 6Gb SAS backend connections (4 total)
24 – 400GB non FDE SSDs

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-1 benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

CONFIGURATION INFORMATION

Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram

Clause 9.4.3.4.1

A one page Benchmark Configuration (BC)/Tested Storage Configuration (TSC) diagram shall be included in the FDR...

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page [19 \(Benchmark Configuration/Tested Storage Configuration Diagram\)](#).

Host System(s) and Tested Storage Configuration (TSC) Table of Components

Clause 9.4.3.4.3

The FDR will contain a table that lists the major components of each Host System and the Tested Storage Configuration (TSC).

The Host System(s) and TSC table of components may be found on page [20 \(Host System\(s\) and Tested Storage Configuration \(TSC\) Table of Components\)](#).

Storage Network Configuration

Clause 9.4.3.4.1


...

- 5. If the TSC contains network storage, the diagram will include the network configuration. If a single diagram is not sufficient to illustrate both the Benchmark Configuration and network configuration in sufficient detail, the Benchmark Configuration diagram will include a high-level network illustration as shown in Figure 9-8. In that case, a separate, detailed network configuration diagram will also be included as described in Clause 9.4.3.4.2.*

Clause 9.4.3.4.2

If a storage network was configured as a part of the Tested Storage Configuration and the Benchmark Configuration diagram described in Clause 9.4.3.4.1 contains a high-level illustration of the network configuration, the Executive Summary will contain a one page topology diagram of the storage network as illustrated in Figure 9-9.

Benchmark Configuration/Tested Storage Configuration Diagram

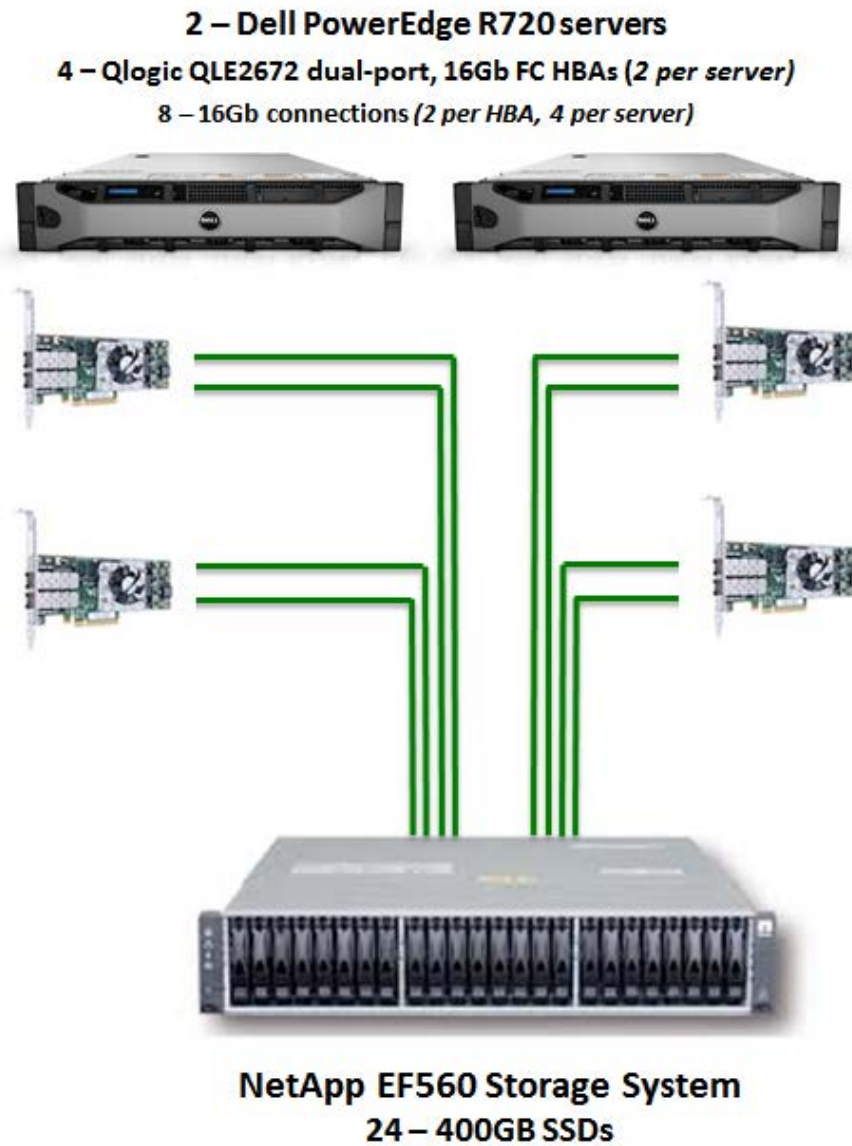

Host System and Tested Storage Configuration Components

Host Systems
<p>2 – Dell PowerEdge R720 servers, each with:</p> <ul style="list-style-type: none">2 – Intel® Xeon® E5-2650 processors 2.00 GHz each with 8 cores, 2 MB L2, 30 MB L332 GB main memoryWindows Server 2008 R2 Enterprise version 6.1 (Build 7601: Service Pack 1)PCIe
Priced Storage Configuration
4 – QLogic QLE2672-CK dual-port, 16Gb, FC HBAs
NetApp EF560 Storage System
<p>1 – Base Enclosure with</p> <ul style="list-style-type: none">2 – controllers, each controller includes:<ul style="list-style-type: none">12 GB cache (24 GB total)4 – 16 Gb FC front-end connections (8 total)2 – 4 x 6Gb SAS backend connections (4 total)24 – 400GB non FDE SSDs

Customer Tunable Parameters and Options

Clause 9.4.3.5.1

All Benchmark Configuration (BC) components with customer tunable parameter and options that have been altered from their default values must be listed in the FDR. The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option. If the parameter name is not self-explanatory to a knowledgeable practitioner, a brief description of the parameter's use must also be included in the FDR entry.

[Appendix B: Customer Tunable Parameters and Options](#) on page [75](#) contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

Tested Storage Configuration (TSC) Description

Clause 9.4.3.5.2

The FDR must include sufficient information to recreate the logical representation of the TSC. In addition to customer tunable parameters and options (Clause 4.2.4.5.3), that information must include, at a minimum:

- A diagram and/or description of the following:
 - All physical components that comprise the TSC. Those components are also illustrated in the BC Configuration Diagram in Clause 9.2.4.4.1 and/or the Storage Network Configuration Diagram in Clause 9.2.4.4.2.
 - The logical representation of the TSC, configured from the above components that will be presented to the Workload Generator.
- Listings of scripts used to create the logical representation of the TSC.
- If scripts were not used, a description of the process used with sufficient detail to recreate the logical representation of the TSC.

[Appendix C: Tested Storage Configuration \(TSC\) Creation](#) on page [76](#) contains the detailed information that describes how to create and configure the logical TSC.

SPC-1 Workload Generator Storage Configuration

Clause 9.4.3.5.3

The FDR must include all SPC-1 Workload Generator storage configuration commands and parameters.

The SPC-1 Workload Generator storage configuration commands and parameters for this measurement appear in [Appendix D: SPC-1 Workload Generator Storage Commands and Parameters](#) on page [79](#).

ASU Pre-Fill

Clause 5.3.3

Each of the three SPC-1 ASUs (ASU-1, ASU-2 and ASU-3) is required to be completely filled with specified content prior to the execution of audited SPC-1 Tests. The content is required to consist of random data pattern such as that produced by an SPC recommended tool.

The configuration file used to complete the required ASU pre-fill appears in [Appendix D: SPC-1 Workload Generator Storage Commands and Parameters](#) on page 79.

SPC-1 DATA REPOSITORY

This portion of the Full Disclosure Report presents the detailed information that fully documents the various SPC-1 storage capacities and mappings used in the Tested Storage Configuration. [SPC-1 Data Repository Definitions](#) on page [71](#) contains definitions of terms specific to the SPC-1 Data Repository.

Storage Capacities and Relationships

Clause 9.4.3.6.1

Two tables and four charts documenting the storage capacities and relationships of the SPC-1 Storage Hierarchy (Clause 2.1) shall be included in the FDR. ... The capacity value in each chart may be listed as an integer value, for readability, rather than the decimal value listed in the table below.

SPC-1 Storage Capacities

The Physical Storage Capacity consisted 9,602.112 GB distributed over 24 solid state storage devices (SSDs), each with a formatted capacity of 400.088 GB. There was 0.00 GB (0.00%) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 141.734 GB (1.48%) of the Physical Storage Capacity. There was 454.065 GB (4.80%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 100.00% of the Addressable Storage Capacity resulting in 0.000 GB (0.00%) of Unused Storage within the Addressable Storage Capacity. The Data Protection (*mirroring*) capacity was 4,730.192 GB of which 4,503.047 GB was utilized. The total Unused Storage capacity was 454.065 GB.


Note: The configured Storage Devices may include additional storage capacity reserved for system overhead, which is not accessible for application use. That storage capacity may not be included in the value presented for Physical Storage Capacity.



SPC-1 Storage Capacities		
Storage Hierarchy Component	Units	Capacity
Total ASU Capacity	Gigabytes (GB)	4,503.047
Addressable Storage Capacity	Gigabytes (GB)	4,503.047
Configured Storage Capacity	Gigabytes (GB)	9,460.385
Physical Storage Capacity	Gigabytes (GB)	9,602.112
Data Protection (<i>Mirroring</i>)	Gigabytes (GB)	4,730.192
Required Storage	Gigabytes (GB)	0.000
Global Storage Overhead	Gigabytes (GB)	141.734
Total Unused Storage	Gigabytes (GB)	454.065


SPC-1 Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	100.00%	46.60%	46.90%
Required for Data Protection (<i>Mirroring</i>)		50.00%	49.26%
Addressable Storage Capacity		47.60%	46.90%
Required Storage		0.00%	0.005
Configured Storage Capacity			98.52%
Global Storage Overhead			1.48%
Unused Storage:			
Addressable	0.00%		
Configured		4.80%	
Physical			0.00%

SPC-1 Storage Capacity Charts

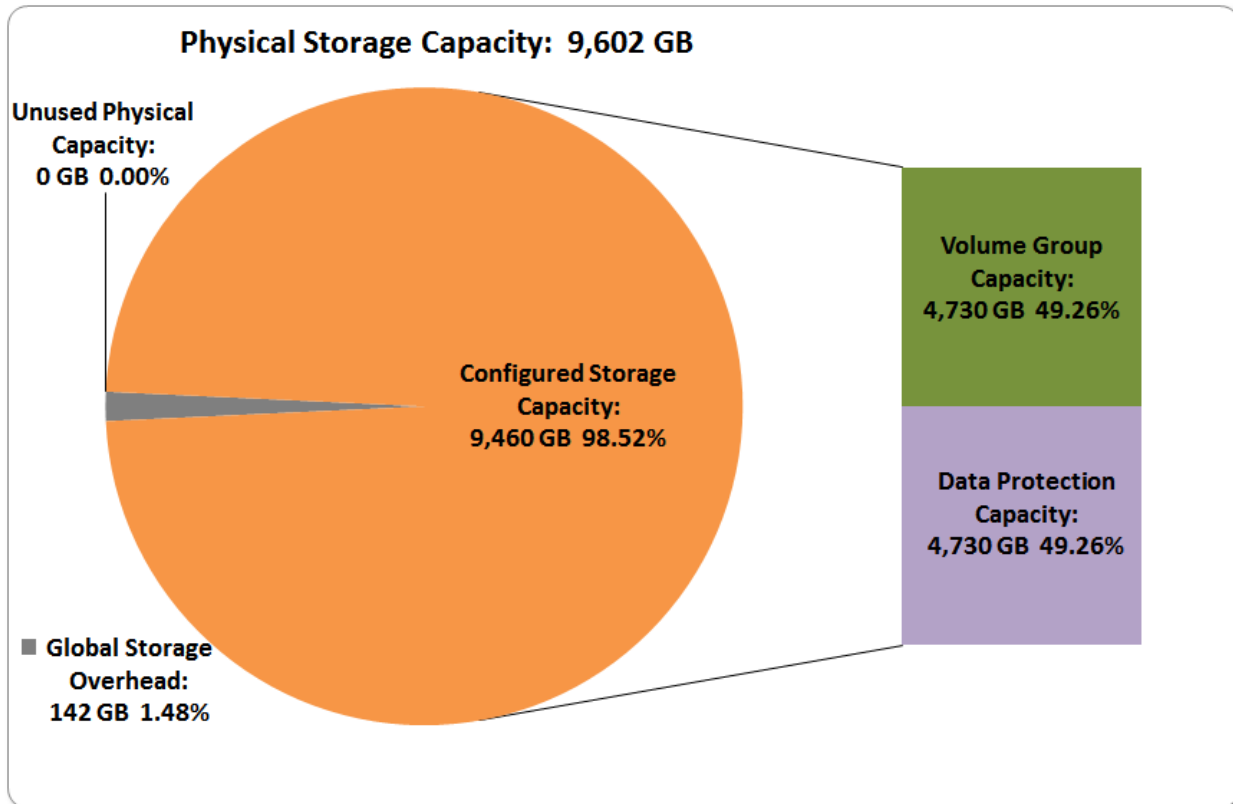

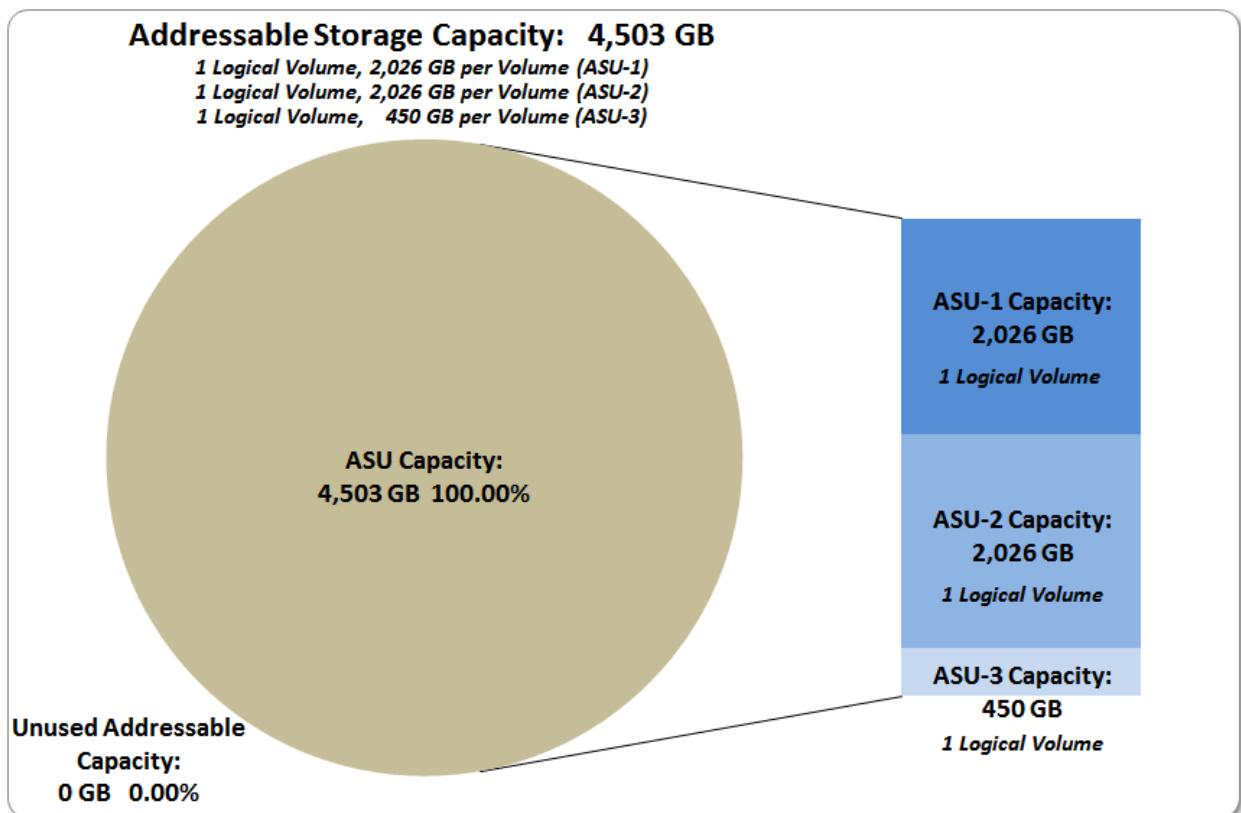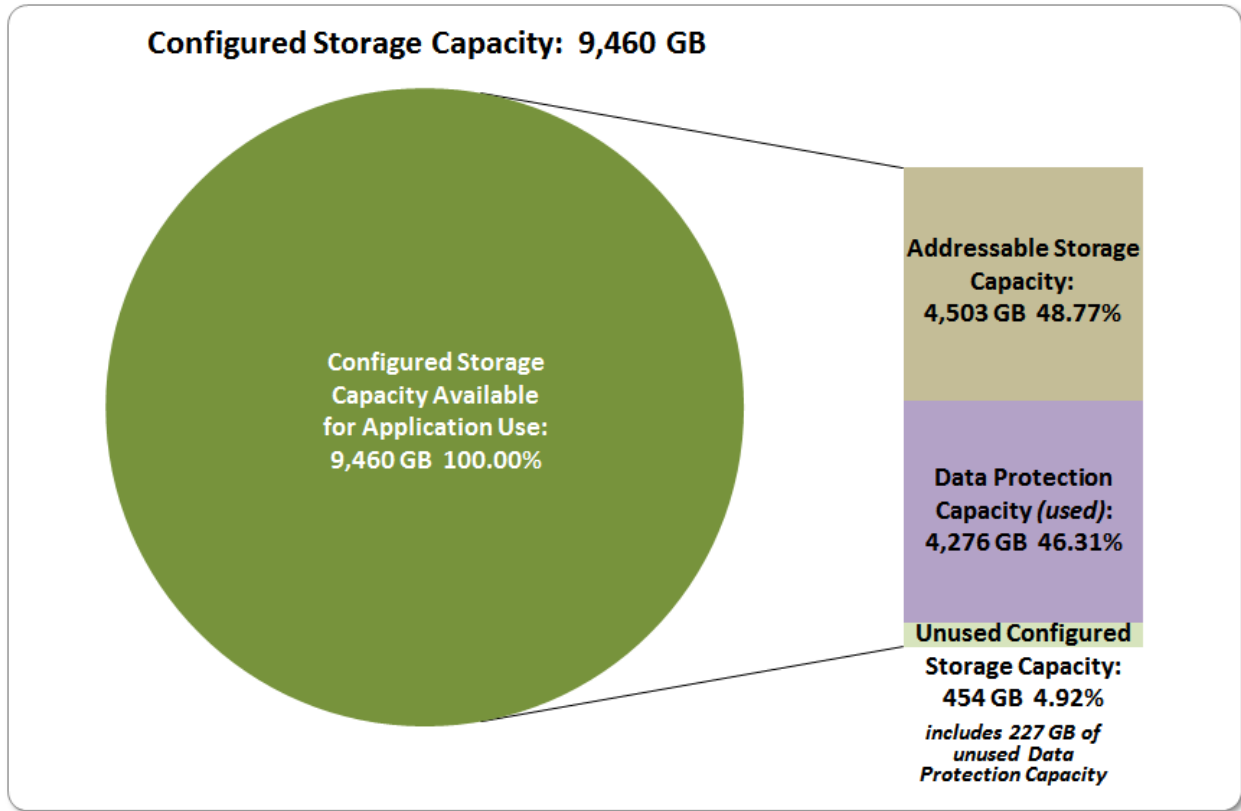

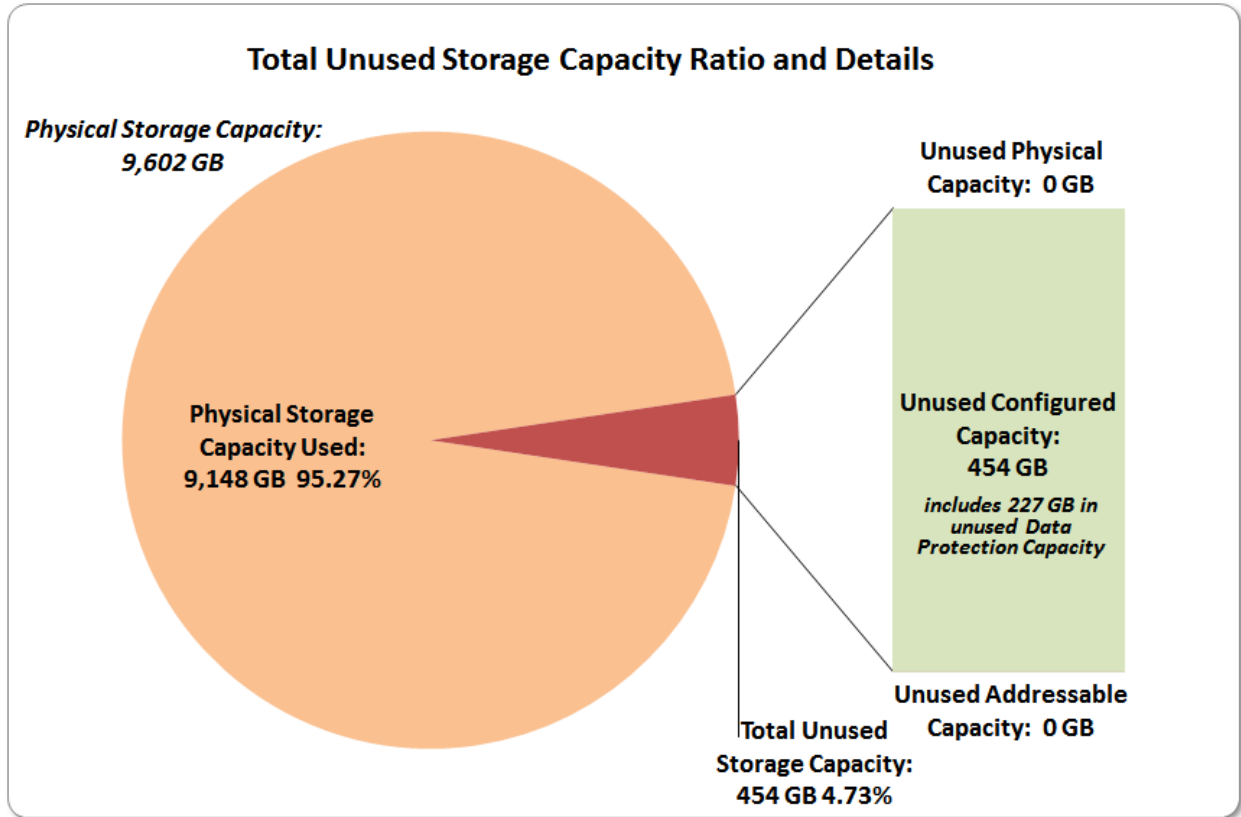

Storage Capacity Utilization

Clause 9.4.3.6.2

The FDR will include a table illustrating the storage capacity utilization values defined for Application Utilization (Clause 2.8.1), Protected Application Utilization (Clause 2.8.2), and Unused Storage Ratio (Clause 2.8.3).

Clause 2.8.1

Application Utilization is defined as Total ASU Capacity divided by Physical Storage Capacity.

Clause 2.8.2

Protected Application Utilization is defined as (Total ASU Capacity plus total Data Protection Capacity minus unused Data Protection Capacity) divided by Physical Storage Capacity.

Clause 2.8.3

Unused Storage Ratio is defined as Total Unused Capacity divided by Physical Storage Capacity and may not exceed 45%.

SPC-1 Storage Capacity Utilization	
Application Utilization	46.90%
Protected Application Utilization	93.79%
Unused Storage Ratio	4.73%

Logical Volume Capacity and ASU Mapping

Clause 9.4.3.6.3

A table illustrating the capacity of each ASU and the mapping of Logical Volumes to ASUs shall be provided in the FDR. ... Logical Volumes shall be sequenced in the table from top to bottom per its position in the contiguous address space of each ASU. The capacity of each Logical Volume shall be stated. ... In conjunction with this table, the Test Sponsor shall provide a complete description of the type of data protection (see Clause 2.4.5) used on each Logical Volume.

Logical Volume Capacity and Mapping		
ASU-1 (2,026.371 GB)	ASU-2 (2,026.371 GB)	ASU-3 (450.305GB)
1 Logical Volume 2,026.371 GB per Logical Volume (2,026.371 GB used per Logical Volume)	1 Logical Volume 2,026.371 GB per Logical Volume (2,026.371 GB used per Logical Volume)	1 Logical Volume 450.305 GB per Logical Volume (450.305 GB used per Logical Volume)

The Data Protection Level used for all Logical Volumes was [Protected 2](#) using *Mirroring* as described on page [11](#). See “ASU Configuration” in the [IOPS Test Results File](#) for more detailed configuration information.

SPC-1 BENCHMARK EXECUTION RESULTS

This portion of the Full Disclosure Report documents the results of the various SPC-1 Tests, Test Phases, and Test Runs. An [SPC-1 glossary](#) on page 71 contains definitions of terms specific to the SPC-1 Tests, Test Phases, and Test Runs.

Clause 5.4.3

The Tests must be executed in the following sequence: Primary Metrics, Repeatability, and Data Persistence. That required sequence must be uninterrupted from the start of Primary Metrics to the completion of Persistence Test Run 1. Uninterrupted means the Benchmark Configuration shall not be power cycled, restarted, disturbed, altered, or adjusted during the above measurement sequence. If the required sequence is interrupted other than for the Host System/TSC power cycle between the two Persistence Test Runs, the measurement is invalid.

SPC-1 Tests, Test Phases, and Test Runs

The SPC-1 benchmark consists of the following Tests, Test Phases, and Test Runs:

- **Primary Metrics Test**
 - Sustainability Test Phase and Test Run
 - IOPS Test Phase and Test Run
 - Response Time Ramp Test Phase
 - 95% of IOPS Test Run
 - 90% of IOPS Test Run
 - 80% of IOPS Test Run
 - 50% of IOPS Test Run
 - 10% of IOPS Test Run (LRT)
- **Repeatability Test**
 - Repeatability Test Phase 1
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
 - Repeatability Test Phase 2
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
- **Data Persistence Test**
 - Data Persistence Test Run 1
 - Data Persistence Test Run 2

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

“Ramp-Up” Test Runs

Clause 5.3.13

In order to warm-up caches or perform the initial ASU data migration in a multi-tier configuration, a Test Sponsor may perform a series of “Ramp-Up” Test Runs as a substitute for an initial, gradual Ramp-Up.

Clause 5.3.13.3

The “Ramp-Up” Test Runs will immediately precede the Primary Metrics Test as part of the uninterrupted SPC-1 measurement sequence.

Clause 9.4.3.7.1

If a series of “Ramp-Up” Test Runs were included in the SPC-1 measurement sequence, the FDR shall report the duration (ramp-up and measurement interval), BSU level, SPC-1 IOPS and average response time for each “Ramp-Up” Test Run in an appropriate table.

There were no “Ramp-Up” Test Runs executed in this set of SPC-1 audited measurements.

Primary Metrics Test – Sustainability Test Phase

Clause 5.4.4.1.1

The Sustainability Test Phase has exactly one Test Run and shall demonstrate the maximum sustainable I/O Request Throughput within at least a continuous eight (8) hour Measurement Interval. This Test Phase also serves to insure that the TSC has reached Steady State prior to reporting the final maximum I/O Request Throughput result (SPC-1 IOPS™).

Clause 5.4.4.1.2

The computed I/O Request Throughput of the Sustainability Test must be within 5% of the reported SPC-1 IOPS™ result.

Clause 5.4.4.1.4

The Average Response Time, as defined in Clause 5.1.1, will be computed and reported for the Sustainability Test Run and cannot exceed 30 milliseconds. If the Average Response time exceeds that 30-milliseconds constraint, the measurement is invalid.

Clause 9.4.3.7.2

For the Sustainability Test Phase the FDR shall contain:

- 1. A Data Rate Distribution graph and data table.*
- 2. I/O Request Throughput Distribution graph and data table.*
- 3. A Response Time Frequency Distribution graph and table.*
- 4. An Average Response Time Distribution graph and table.*
- 5. The human readable Test Run Results File produced by the Workload Generator (may be included in an appendix).*
- 6. A listing or screen image of all input parameters supplied to the Workload Generator (may be included in an appendix).*
- 7. The Measured Intensity Multiplier for each I/O stream.*
- 8. The variability of the Measured Intensity Multiplier, as defined in Clause 5.3.13.3.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page 82.

Sustainability Test Results File

A link to the test results file generated from the Sustainability Test Run is listed below.


[Sustainability Test Results File](#)

Sustainability – Data Rate Distribution Data (MB/second)

The Sustainability Data Rate table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Data Rate Table](#)

Sustainability – Data Rate Distribution Graph

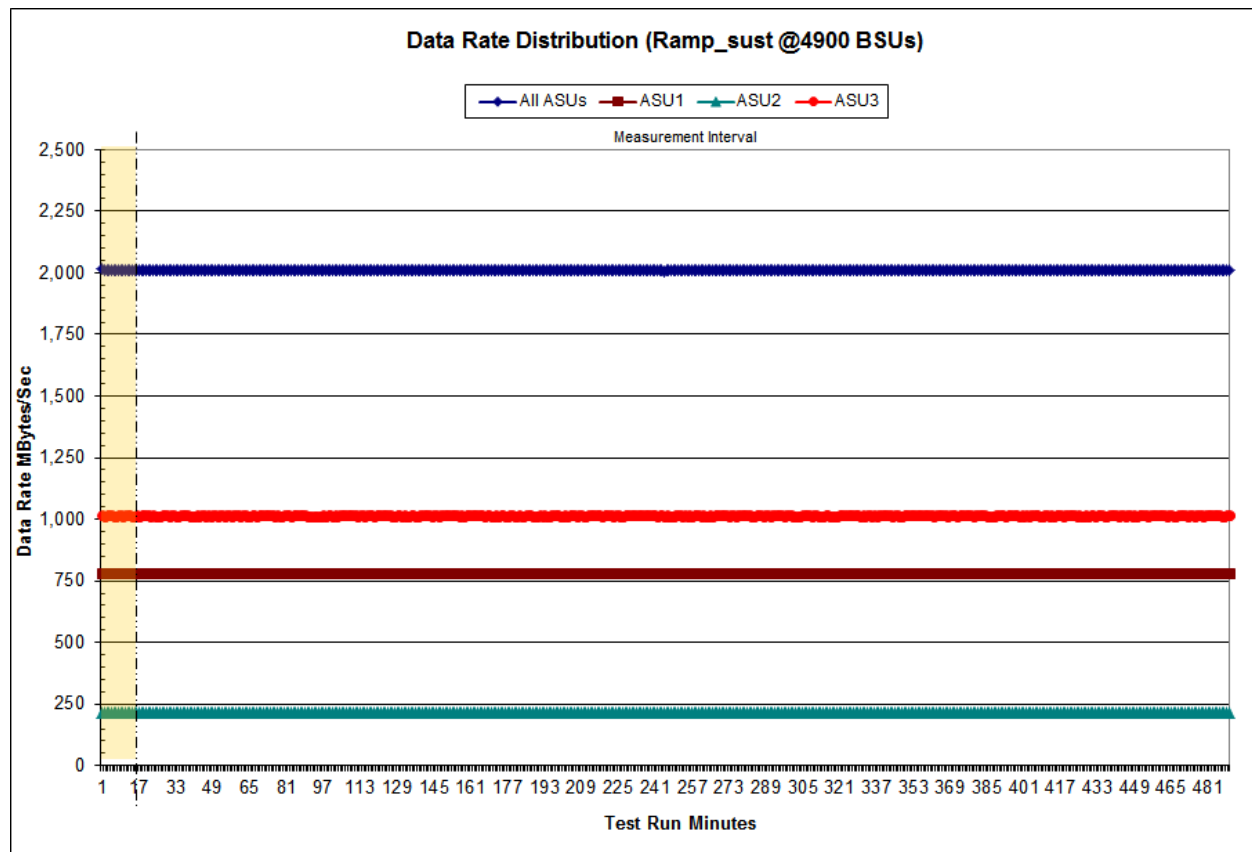


Sustainability – I/O Request Throughput Distribution Data

The Sustainability I/O Request Throughput table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability I/O Request Throughput Table](#)

Sustainability – I/O Request Throughput Distribution Graph

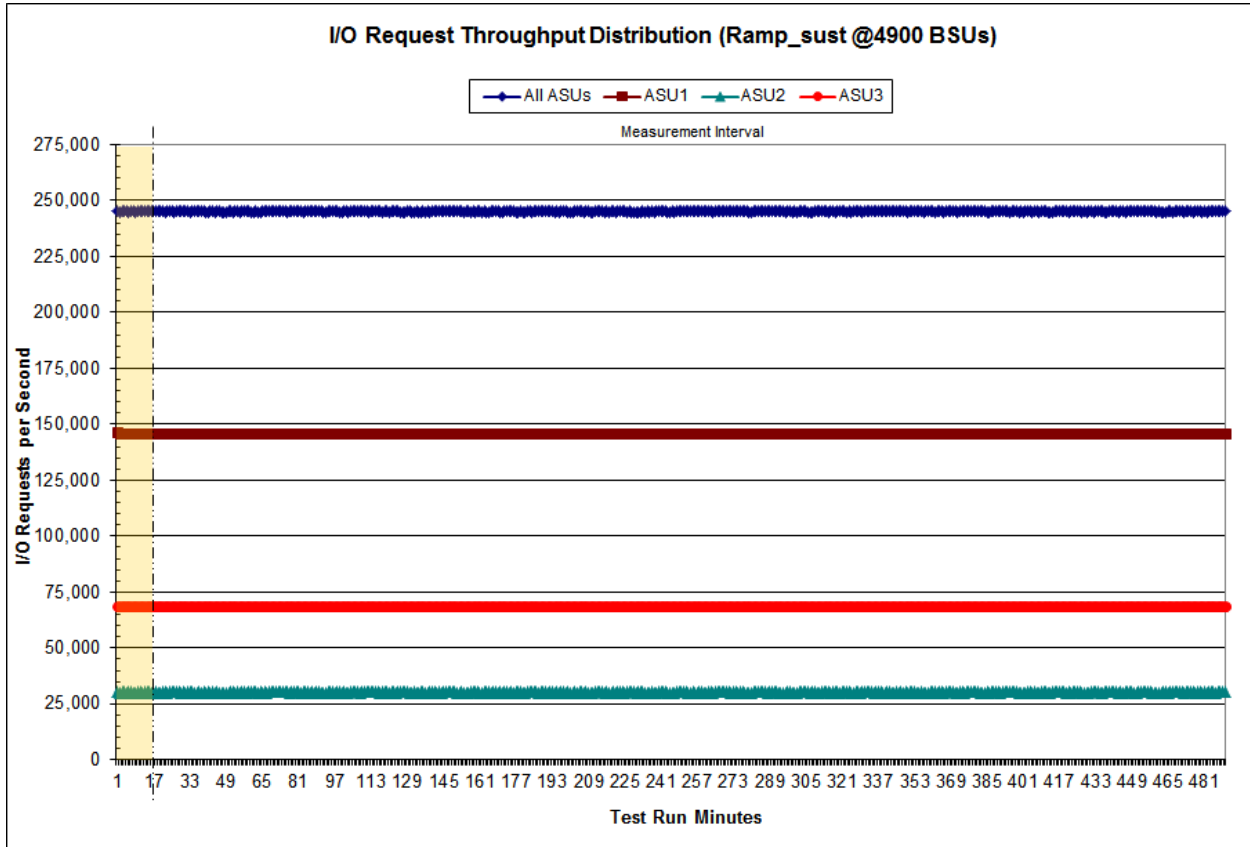


Sustainability – Average Response Time (ms) Distribution Data

The Sustainability Average Response Time table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Average Response Time Table](#)


Sustainability – Average Response Time (ms) Distribution Graph

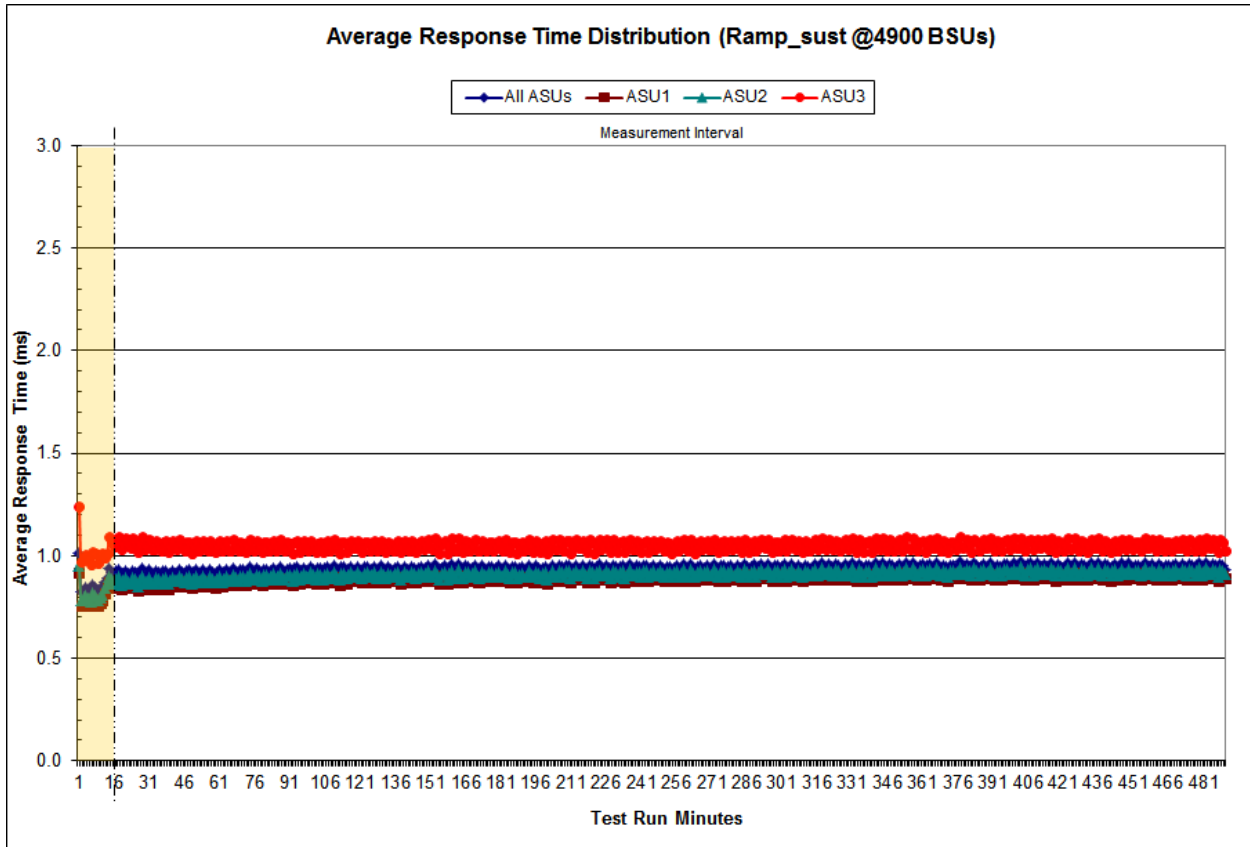

Sustainability – Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	45,149,061	950,867,665	775,118,258	315,397,174	198,086,146	111,016,339	78,707,565	61,432,150
Write	10,646,523	403,991,534	1,051,007,133	950,351,177	850,911,215	489,562,355	262,962,976	124,956,147
All ASUs	55,795,584	1,354,859,199	1,826,125,391	1,265,748,351	1,048,997,361	600,578,694	341,670,541	186,388,297
ASU1	46,849,834	1,023,501,538	1,150,661,429	682,630,354	520,497,824	281,530,595	160,419,379	94,676,293
ASU2	6,321,854	188,092,544	239,845,621	150,335,042	116,015,740	62,598,024	34,885,121	19,936,392
ASU3	2,623,896	143,265,117	435,618,341	432,782,955	412,483,797	256,450,075	146,366,041	71,775,612
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	131,359,038	89,136,398	16,799,642	3,278,460	2,692,346	2,055,443	1,304,086	338,683
Write	104,185,659	18,198,575	4,926,730	964,264	288,446	76,703	55,026	24,245
All ASUs	235,544,697	107,334,973	21,726,372	4,242,724	2,980,792	2,132,146	1,359,112	362,928
ASU1	142,904,043	78,453,052	14,847,977	2,915,053	2,319,157	1,728,968	1,080,912	288,124
ASU2	28,670,181	16,062,397	3,382,996	608,639	451,998	348,494	244,728	61,661
ASU3	63,970,473	12,819,524	3,495,399	719,032	209,637	54,684	33,472	13,143
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	93,488	41,761	20,722	5,932	357	58	14	41
Write	14,346	8,439	5,169	9,735	1,478	400	147	164
All ASUs	107,834	50,200	25,891	15,667	1,835	458	161	205
ASU1	80,660	36,422	18,230	7,380	537	94	31	67
ASU2	19,135	8,795	4,513	1,558	83	11	4	17
ASU3	8,039	4,983	3,148	6,729	1,215	353	126	121

Sustainability – Response Time Frequency Distribution Graph

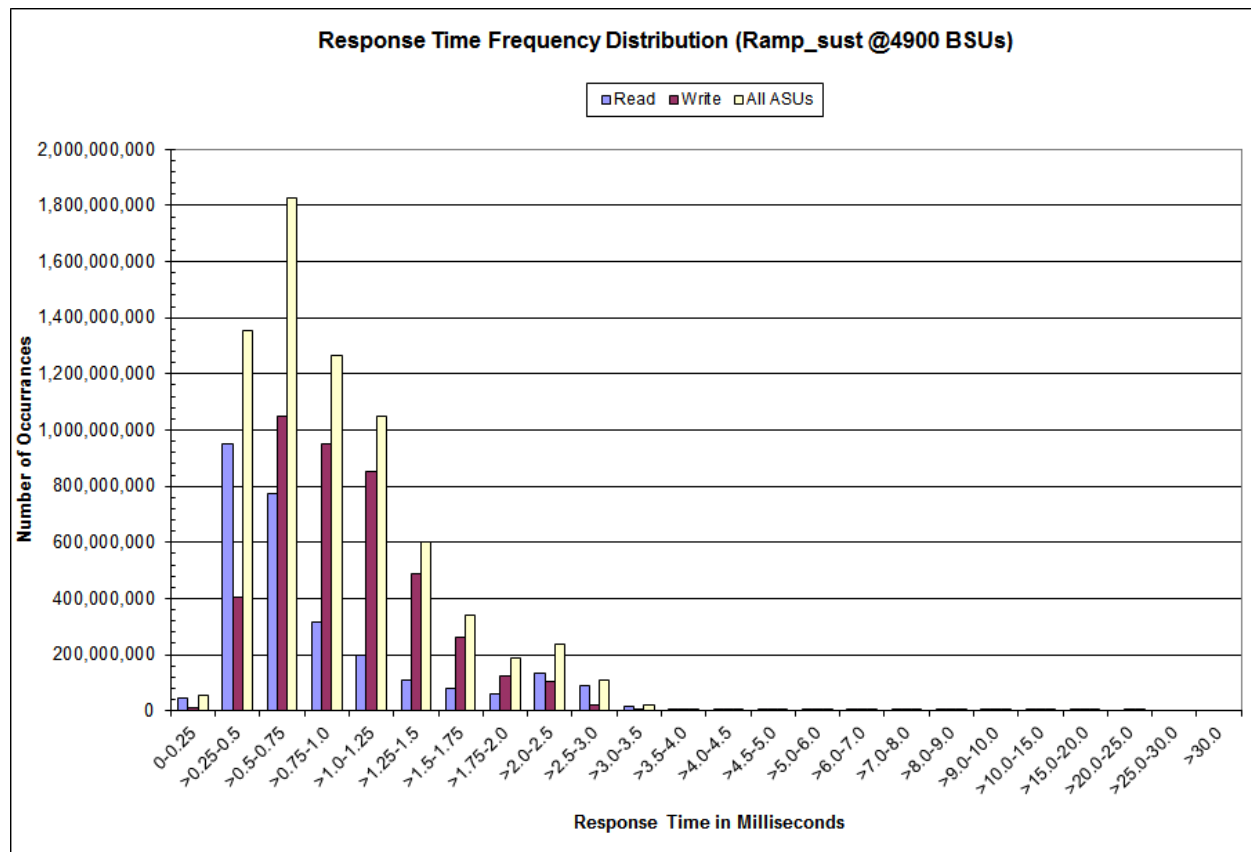

Sustainability – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.001	0.000	0.001	0.000	0.002	0.001	0.001	0.000

Primary Metrics Test – IOPS Test Phase

Clause 5.4.4.2

The IOPS Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of ten (10) minutes. The IOPS Test Phase immediately follows the Sustainability Test Phase without any interruption or manual intervention.

The IOPS Test Run generates the SPC-1 IOPS™ primary metric, which is computed as the I/O Request Throughput for the Measurement Interval of the IOPS Test Run.

The Average Response Time is computed for the IOPS Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds the 30 millisecond constraint, the measurement is invalid.

Clause 9.4.3.7.3

For the IOPS Test Phase the FDR shall contain:

- 1. I/O Request Throughput Distribution (data and graph).*
- 2. A Response Time Frequency Distribution.*
- 3. An Average Response Time Distribution.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*
- 6. The total number of I/O Requests completed in the Measurement Interval as well as the number of I/O Requests with a Response Time less than or equal to 30 milliseconds and the number of I/O Requests with a Response Time greater than 30 milliseconds.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [82](#).

IOPS Test Results File


A link to the test results file generated from the IOPS Test Run is listed below.

[IOPS Test Results File](#)

IOPS Test Run – I/O Request Throughput Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	14:59:39	15:09:40	0-9	0:10:01
Measurement Interval	15:09:40	15:19:40	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	244,931.65	145,940.62	30,159.15	68,831.88
1	244,985.30	146,025.82	30,100.37	68,859.12
2	245,013.70	146,064.80	30,122.20	68,826.70
3	245,036.25	146,044.03	30,153.65	68,838.57
4	245,032.87	146,037.98	30,104.22	68,890.67
5	245,038.85	146,022.87	30,111.23	68,904.75
6	245,020.10	146,010.73	30,156.15	68,853.22
7	245,006.22	146,045.82	30,154.75	68,805.65
8	244,935.10	145,969.28	30,122.82	68,843.00
9	245,014.22	146,024.75	30,123.98	68,865.48
10	245,016.60	146,011.20	30,138.37	68,867.03
11	244,994.40	145,996.33	30,135.75	68,862.32
12	245,032.73	146,007.70	30,150.12	68,874.92
13	245,102.80	146,061.73	30,146.72	68,894.35
14	245,076.45	146,079.30	30,153.22	68,843.93
15	244,940.27	145,986.02	30,102.37	68,851.88
16	244,953.95	145,983.62	30,124.55	68,845.78
17	245,010.03	146,037.60	30,107.63	68,864.80
18	244,985.93	145,970.55	30,125.88	68,889.50
19	245,004.38	146,066.02	30,115.68	68,822.68
Average	245,011.76	146,020.01	30,130.03	68,861.72


IOPS Test Run – I/O Request Throughput Distribution Graph

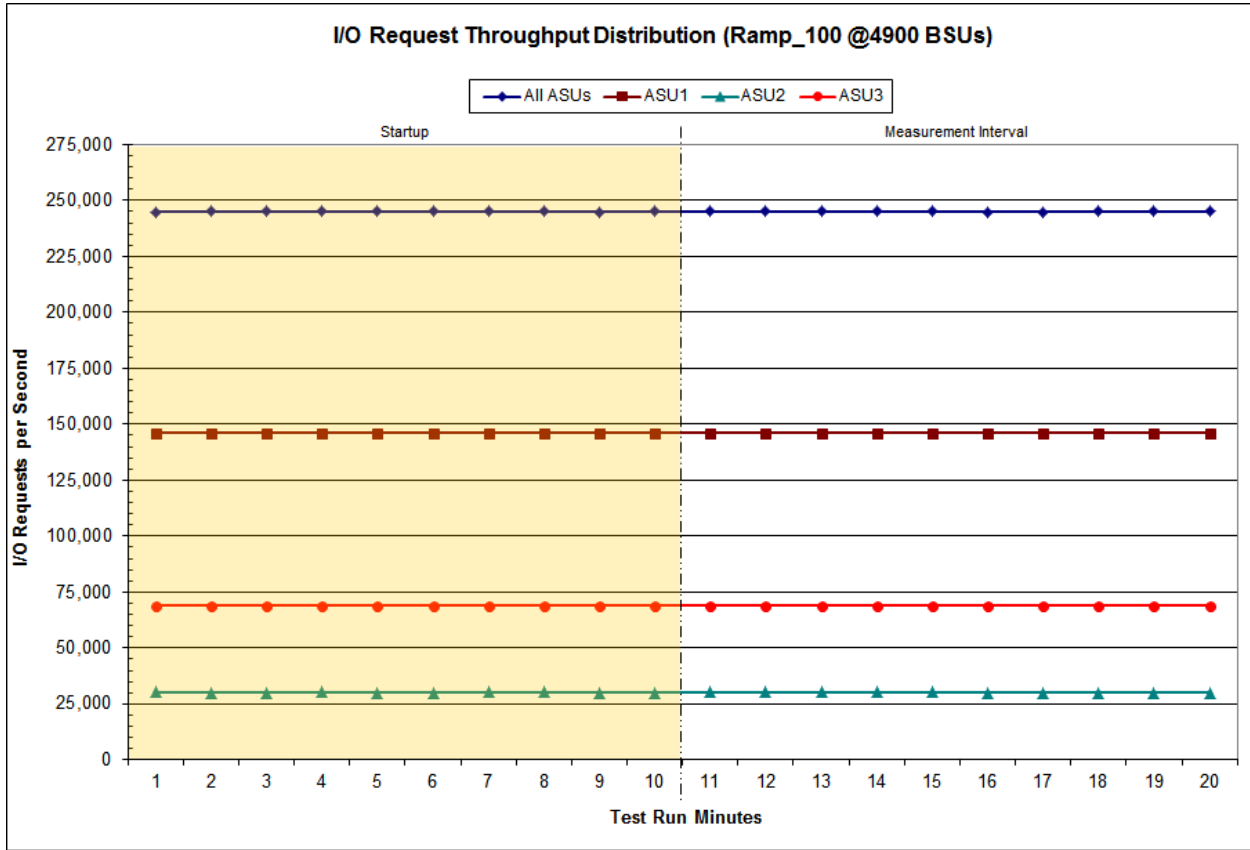

IOPS Test Run – Average Response Time (ms) Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	14:59:39	15:09:40	0-9	0:10:01
Measurement Interval	15:09:40	15:19:40	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.95	0.90	0.93	1.06
1	0.92	0.88	0.90	1.02
2	0.96	0.90	0.93	1.08
3	0.94	0.89	0.92	1.05
4	0.91	0.87	0.90	1.01
5	0.94	0.89	0.92	1.05
6	0.95	0.90	0.93	1.07
7	0.91	0.87	0.90	1.01
8	0.93	0.88	0.90	1.03
9	0.95	0.90	0.92	1.06
10	0.92	0.88	0.90	1.03
11	0.92	0.87	0.90	1.02
12	0.95	0.90	0.92	1.06
13	0.95	0.90	0.92	1.06
14	0.92	0.88	0.90	1.02
15	0.94	0.90	0.92	1.06
16	0.94	0.89	0.92	1.05
17	0.92	0.88	0.90	1.02
18	0.93	0.89	0.91	1.04
19	0.95	0.90	0.92	1.07
Average	0.93	0.89	0.91	1.04


IOPS Test Run – Average Response Time (ms) Distribution Graph

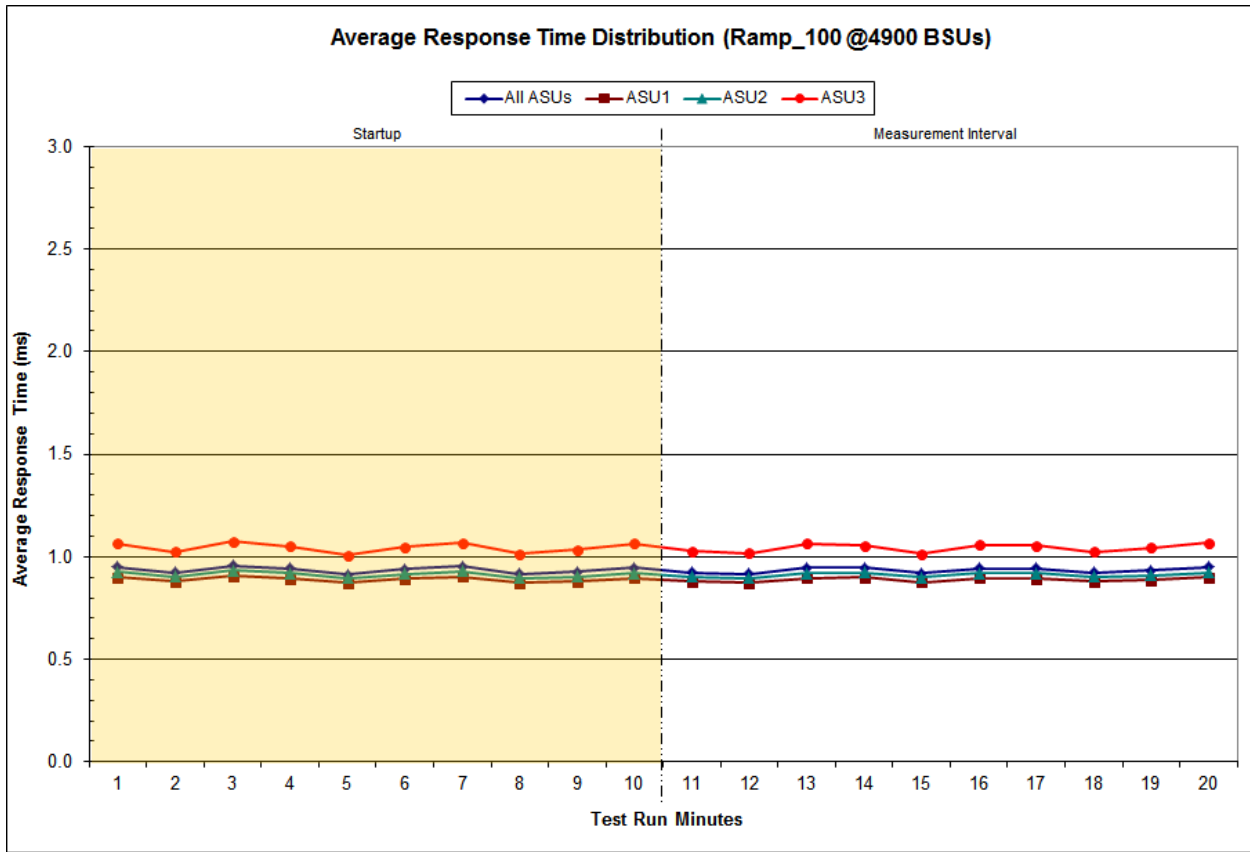

IOPS Test Run –Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	1,103,439	19,497,121	15,927,979	6,531,074	4,145,460	2,368,625	1,688,415	1,334,645
Write	201,113	8,298,069	22,353,344	20,230,567	17,756,985	10,028,364	5,242,897	2,460,097
All ASUs	1,304,552	27,795,190	38,281,323	26,761,641	21,902,445	12,396,989	6,931,312	3,794,742
ASU1	1,127,000	21,018,160	24,028,536	14,363,593	10,827,858	5,808,697	3,275,287	1,957,677
ASU2	128,186	3,854,501	5,023,459	3,169,858	2,417,600	1,293,852	712,040	411,464
ASU3	49,366	2,922,529	9,229,328	9,228,190	8,656,987	5,294,440	2,943,985	1,425,601
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	2,874,199	1,937,541	359,292	69,800	57,499	45,085	29,283	7,747
Write	1,991,931	345,511	90,595	17,901	5,239	1,463	1,039	411
All ASUs	4,866,130	2,283,052	449,887	87,701	62,738	46,548	30,322	8,158
ASU1	3,022,331	1,687,126	313,201	61,422	49,493	37,752	24,203	6,487
ASU2	607,850	349,093	72,082	13,022	9,484	7,740	5,529	1,454
ASU3	1,235,949	246,833	64,604	13,257	3,761	1,056	590	217
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	2,059	945	490	98	-	-	-	-
Write	238	112	49	66	7	-	-	-
All ASUs	2,297	1,057	539	164	7	-	-	-
ASU1	1,760	782	397	105	1	-	-	-
ASU2	411	217	113	21	2	-	-	-
ASU3	126	58	29	38	4	-	-	-

IOPS Test Run –Response Time Frequency Distribution Graph

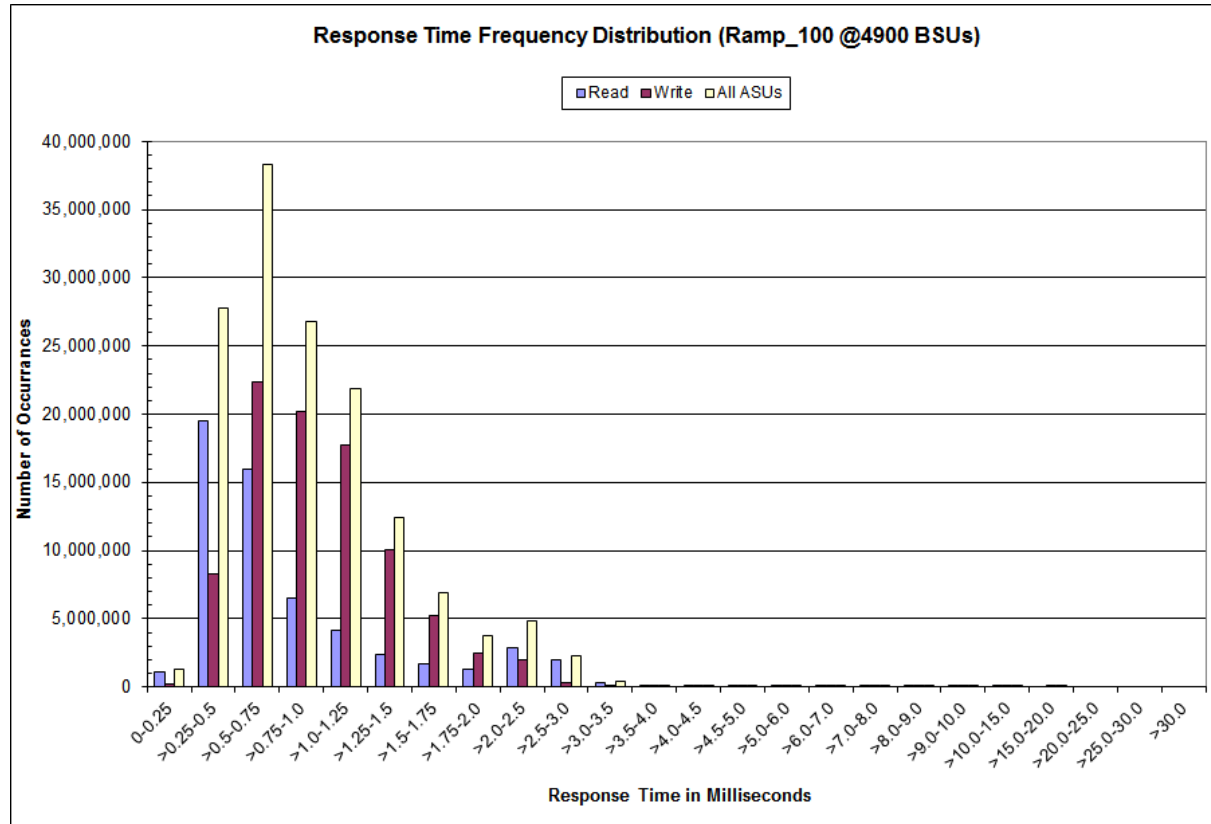

IOPS Test Run – I/O Request Information

I/O Requests Completed in the Measurement Interval	I/O Requests Completed with Response Time = or < 30 ms	I/O Requests Completed with Response Time > 30 ms
147,006,794	147,006,794	0

IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2811
COV	0.001	0.000	0.001	0.000	0.002	0.001	0.001	0.000

Primary Metrics Test – Response Time Ramp Test Phase

Clause 5.4.4.3

The Response Time Ramp Test Phase consists of five Test Runs, one each at 95%, 90%, 80%, 50%, and 10% of the load point (100%) used to generate the SPC-1 IOPS™ primary metric. Each of the five Test Runs has a Measurement Interval of ten (10) minutes. The Response Time Ramp Test Phase immediately follows the IOPS Test Phase without any interruption or manual intervention.

The five Response Time Ramp Test Runs, in conjunction with the IOPS Test Run (100%), demonstrate the relationship between Average Response Time and I/O Request Throughput for the Tested Storage Configuration (TSC) as illustrated in the response time/throughput curve on page 15.

In addition, the Average Response Time measured during the 10% Test Run is the value for the SPC-1 LRT™ metric. That value represents the Average Response Time of a lightly loaded TSC.

Clause 9.4.3.7.4

The following content shall appear in the FDR for the Response Time Ramp Phase:

- 1. A Response Time Ramp Distribution.*
- 2. The human readable Test Run Results File produced by the Workload Generator for each Test Run within the Response Time Ramp Test Phase.*
- 3. For the 10% Load Level Test Run (SPC-1 LRT™ metric) an Average Response Time Distribution.*
- 4. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [82](#).

Response Time Ramp Test Results File

A link to each test result file generated from each Response Time Ramp Test Run list listed below.

[95% Load Level](#)

[90% Load Level](#)

[80% Load Level](#)

[50% Load Level](#)

[10% Load Level](#)

Response Time Ramp Distribution (IOPS) Data


The five Test Runs that comprise the Response Time Ramp Phase are executed at 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit (BSU) load level used to produce the SPC-1 IOPS™ primary metric. The 100% BSU load level is included in the following Response Time Ramp data table and graph for completeness.

100% Load Level: 4,900 BSUs					95% Load Level: 4,655 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	14:59:39	15:09:40	0-9	0:10:01	Start-Up/Ramp-Up	15:20:14	15:30:15	0-9	0:10:01
Measurement Interval	15:09:40	15:19:40	10-19	0:10:00	Measurement Interval	15:30:15	15:40:15	10-19	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	244,931.65	145,940.62	30,159.15	68,831.88	0	232,673.02	138,640.28	28,638.75	65,393.98
1	244,985.30	146,025.82	30,100.37	68,859.12	1	232,742.22	138,675.73	28,635.58	65,430.90
2	245,013.70	146,064.80	30,122.20	68,826.70	2	232,797.20	138,769.05	28,640.48	65,387.67
3	245,036.25	146,044.03	30,153.65	68,838.57	3	232,695.22	138,662.97	28,663.58	65,368.67
4	245,032.87	146,037.98	30,104.22	68,890.67	4	232,698.02	138,677.37	28,630.55	65,390.10
5	245,038.85	146,022.87	30,111.23	68,904.75	5	232,719.43	138,674.37	28,658.12	65,386.95
6	245,020.10	146,010.73	30,156.15	68,853.22	6	232,704.83	138,662.42	28,613.40	65,429.02
7	245,006.22	146,045.82	30,154.75	68,805.65	7	232,883.53	138,822.70	28,641.42	65,419.42
8	244,935.10	145,969.28	30,122.82	68,843.00	8	232,827.77	138,803.33	28,650.80	65,373.63
9	245,014.22	146,024.75	30,123.98	68,865.48	9	232,852.97	138,815.18	28,617.57	65,420.22
10	245,016.60	146,011.20	30,138.37	68,867.03	10	232,775.72	138,750.98	28,626.45	65,398.28
11	244,994.40	145,996.33	30,135.75	68,862.32	11	232,758.75	138,689.17	28,632.70	65,436.88
12	245,032.73	146,007.70	30,150.12	68,874.92	12	232,859.58	138,770.32	28,616.83	65,472.43
13	245,102.80	146,061.73	30,146.72	68,894.35	13	232,831.90	138,777.18	28,667.68	65,387.03
14	245,076.45	146,079.30	30,153.22	68,843.93	14	232,669.17	138,617.93	28,664.88	65,386.35
15	244,940.27	145,986.02	30,102.37	68,851.88	15	232,800.37	138,789.12	28,620.02	65,391.23
16	244,953.95	145,983.62	30,124.55	68,845.78	16	232,722.73	138,671.73	28,626.90	65,424.10
17	245,010.03	146,037.60	30,107.63	68,864.80	17	232,728.57	138,707.18	28,634.70	65,386.68
18	244,985.93	145,970.55	30,125.88	68,889.50	18	232,737.12	138,690.57	28,665.08	65,381.47
19	245,004.38	146,066.02	30,115.68	68,822.68	19	232,735.55	138,668.62	28,594.93	65,472.00
Average	245,011.76	146,020.01	30,130.03	68,861.72	Average	232,761.95	138,713.28	28,635.02	65,413.65
90% Load Level: 4,410 BSUs					80% Load Level: 3,920 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	15:40:49	15:50:50	0-9	0:10:01	Start-Up/Ramp-Up	16:01:21	16:11:22	0-9	0:10:01
Measurement Interval	15:50:50	16:00:50	10-19	0:10:00	Measurement Interval	16:11:22	16:21:22	10-19	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	220,594.67	131,493.02	27,096.17	62,005.48	0	196,001.05	116,822.22	24,123.35	55,055.48
1	220,492.62	131,461.55	27,111.28	61,919.78	1	195,972.57	116,801.67	24,078.38	55,092.52
2	220,532.15	131,447.97	27,113.70	61,970.48	2	195,978.37	116,810.53	24,103.03	55,064.80
3	220,526.08	131,463.70	27,097.55	61,964.83	3	196,052.77	116,817.57	24,130.63	55,104.57
4	220,587.68	131,451.77	27,132.88	62,003.03	4	195,959.65	116,777.13	24,122.38	55,060.13
5	220,481.30	131,421.78	27,074.30	61,985.22	5	196,075.43	116,904.97	24,083.28	55,087.18
6	220,586.27	131,437.25	27,158.17	61,990.85	6	196,107.77	116,812.95	24,146.37	55,148.45
7	220,574.37	131,424.57	27,182.58	61,967.22	7	196,010.72	116,807.02	24,089.88	55,113.82
8	220,495.15	131,468.40	27,115.68	61,911.07	8	196,018.35	116,818.08	24,123.75	55,076.52
9	220,492.27	131,358.17	27,144.05	61,990.05	9	195,988.08	116,827.53	24,107.38	55,053.17
10	220,478.38	131,394.02	27,142.17	61,942.20	10	196,020.67	116,819.93	24,132.82	55,067.92
11	220,544.57	131,486.35	27,118.72	61,939.50	11	196,006.13	116,800.98	24,105.65	55,099.50
12	220,531.55	131,430.00	27,135.85	61,965.70	12	195,936.75	116,711.35	24,162.32	55,063.08
13	220,473.23	131,406.63	27,121.03	61,945.57	13	195,994.20	116,805.18	24,130.98	55,058.03
14	220,436.88	131,358.57	27,104.70	61,973.62	14	195,981.47	116,843.10	24,090.48	55,047.88
15	220,522.78	131,477.30	27,097.70	61,947.78	15	196,068.45	116,884.42	24,107.65	55,076.38
16	220,502.08	131,399.18	27,104.87	61,998.03	16	195,997.87	116,789.03	24,118.80	55,090.03
17	220,524.25	131,429.00	27,097.82	61,997.43	17	196,071.25	116,856.27	24,125.35	55,089.63
18	220,576.72	131,453.12	27,120.25	62,003.35	18	196,004.93	116,844.83	24,097.03	55,063.07
19	220,498.25	131,432.60	27,098.13	61,967.52	19	196,002.38	116,859.27	24,099.40	55,043.72
Average	220,508.87	131,426.68	27,114.12	61,968.07	Average	196,008.41	116,821.44	24,117.05	55,069.93

Response Time Ramp Distribution (IOPS) Data (continued)

50% Load Level: 2,450 BSUs					10% Load Level: 490 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	16:21:47	16:31:48	0-9	0:10:01	Start-Up/Ramp-Up	16:42:02	16:52:03	0-9	0:10:01
Measurement Interval	16:31:48	16:41:48	10-19	0:10:00	Measurement Interval	16:52:03	17:02:03	10-19	0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	122,566.73	73,033.12	15,092.98	34,440.63	0	24,523.50	14,624.28	3,018.15	6,881.07
1	122,540.03	72,992.27	15,054.22	34,493.55	1	24,502.72	14,612.80	3,017.50	6,872.42
2	122,526.48	73,004.28	15,083.22	34,438.98	2	24,519.38	14,615.48	3,009.92	6,893.98
3	122,453.43	73,005.57	15,017.75	34,430.12	3	24,505.38	14,589.90	3,012.50	6,902.98
4	122,543.47	73,006.47	15,086.28	34,450.72	4	24,495.78	14,592.08	3,013.23	6,890.47
5	122,514.77	73,024.05	15,079.03	34,411.68	5	24,462.80	14,577.20	3,010.28	6,875.32
6	122,468.23	72,972.10	15,082.95	34,413.18	6	24,504.93	14,610.77	3,014.77	6,879.40
7	122,472.22	72,983.68	15,064.83	34,423.70	7	24,514.80	14,611.18	3,018.37	6,885.25
8	122,562.32	73,014.93	15,079.40	34,467.98	8	24,530.80	14,621.93	3,023.47	6,885.40
9	122,410.32	72,930.32	15,074.05	34,405.95	9	24,487.48	14,603.25	3,007.67	6,876.57
10	122,448.32	72,942.05	15,070.60	34,435.67	10	24,494.42	14,593.78	3,010.32	6,890.32
11	122,495.43	73,014.95	15,054.98	34,425.50	11	24,537.60	14,634.13	3,017.72	6,885.75
12	122,431.17	72,980.38	15,041.93	34,408.85	12	24,502.32	14,601.32	3,020.78	6,880.22
13	122,603.77	73,081.58	15,103.57	34,418.62	13	24,535.17	14,616.63	3,029.35	6,889.18
14	122,504.85	73,005.37	15,062.30	34,437.18	14	24,483.97	14,588.77	3,011.70	6,883.50
15	122,455.47	72,993.10	15,060.98	34,401.38	15	24,492.42	14,605.23	3,013.10	6,874.08
16	122,417.67	72,951.03	15,056.12	34,410.52	16	24,472.10	14,594.15	3,008.45	6,869.50
17	122,564.62	72,993.88	15,074.98	34,495.75	17	24,505.33	14,600.38	3,020.60	6,884.35
18	122,517.95	73,053.47	15,042.13	34,422.35	18	24,468.17	14,587.35	3,007.65	6,873.17
19	122,480.48	72,984.17	15,055.65	34,440.67	19	24,518.88	14,622.22	3,015.68	6,880.98
Average	122,491.97	73,000.00	15,062.33	34,429.65	Average	24,501.04	14,604.40	3,015.54	6,881.11


Response Time Ramp Distribution (IOPS) Graph

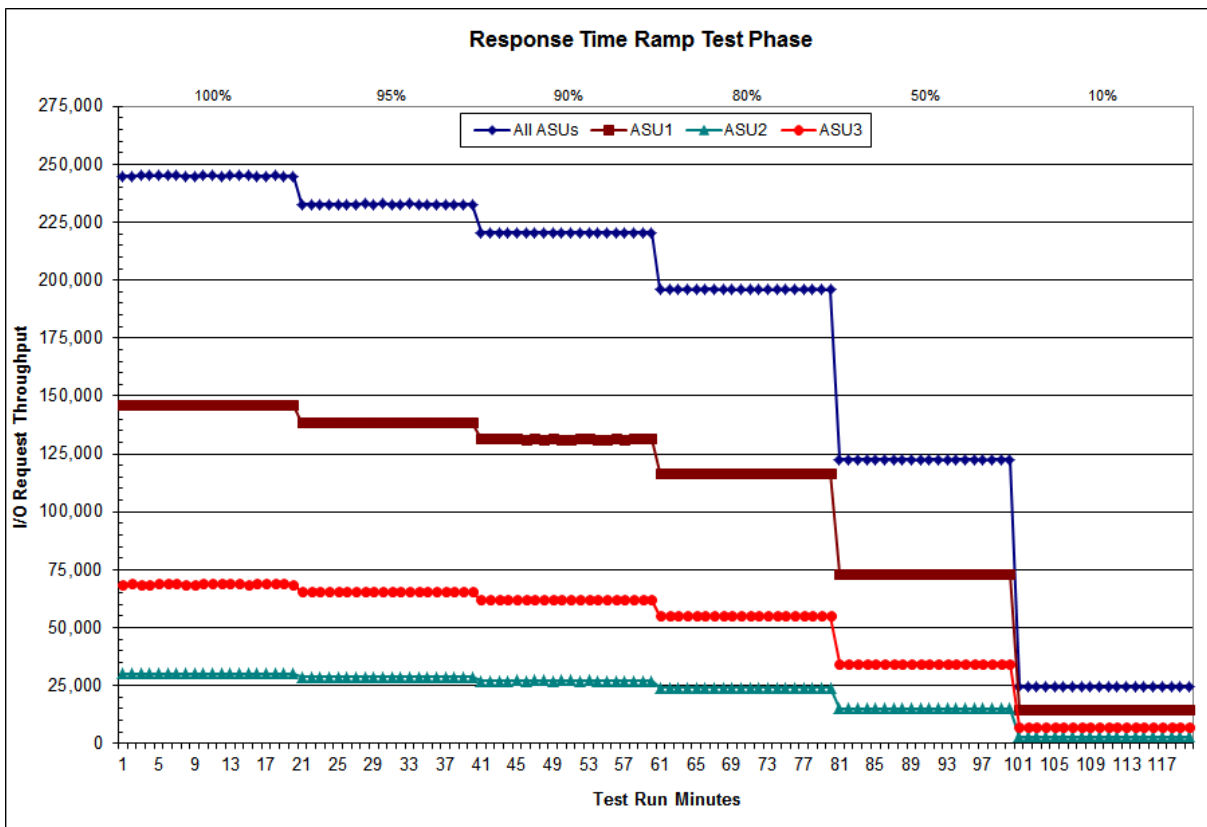

SPC-1 LRT™ Average Response Time (ms) Distribution Data

490 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	16:42:02	16:52:03	0-9	0:10:01
Measurement Interval	16:52:03	17:02:03	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.18	0.18	0.19	0.17
1	0.18	0.18	0.18	0.17
2	0.18	0.18	0.19	0.17
3	0.18	0.18	0.19	0.17
4	0.18	0.18	0.19	0.17
5	0.18	0.18	0.18	0.17
6	0.18	0.18	0.19	0.17
7	0.18	0.18	0.19	0.17
8	0.18	0.18	0.18	0.17
9	0.18	0.19	0.19	0.17
10	0.18	0.18	0.19	0.17
11	0.18	0.18	0.18	0.17
12	0.18	0.18	0.19	0.17
13	0.18	0.19	0.19	0.17
14	0.18	0.18	0.19	0.17
15	0.18	0.18	0.18	0.17
16	0.18	0.18	0.19	0.18
17	0.18	0.18	0.19	0.17
18	0.18	0.18	0.18	0.17
19	0.18	0.18	0.19	0.17
Average	0.18	0.18	0.19	0.17

SPC-1 LRT™ Average Response Time (ms) Distribution Graph

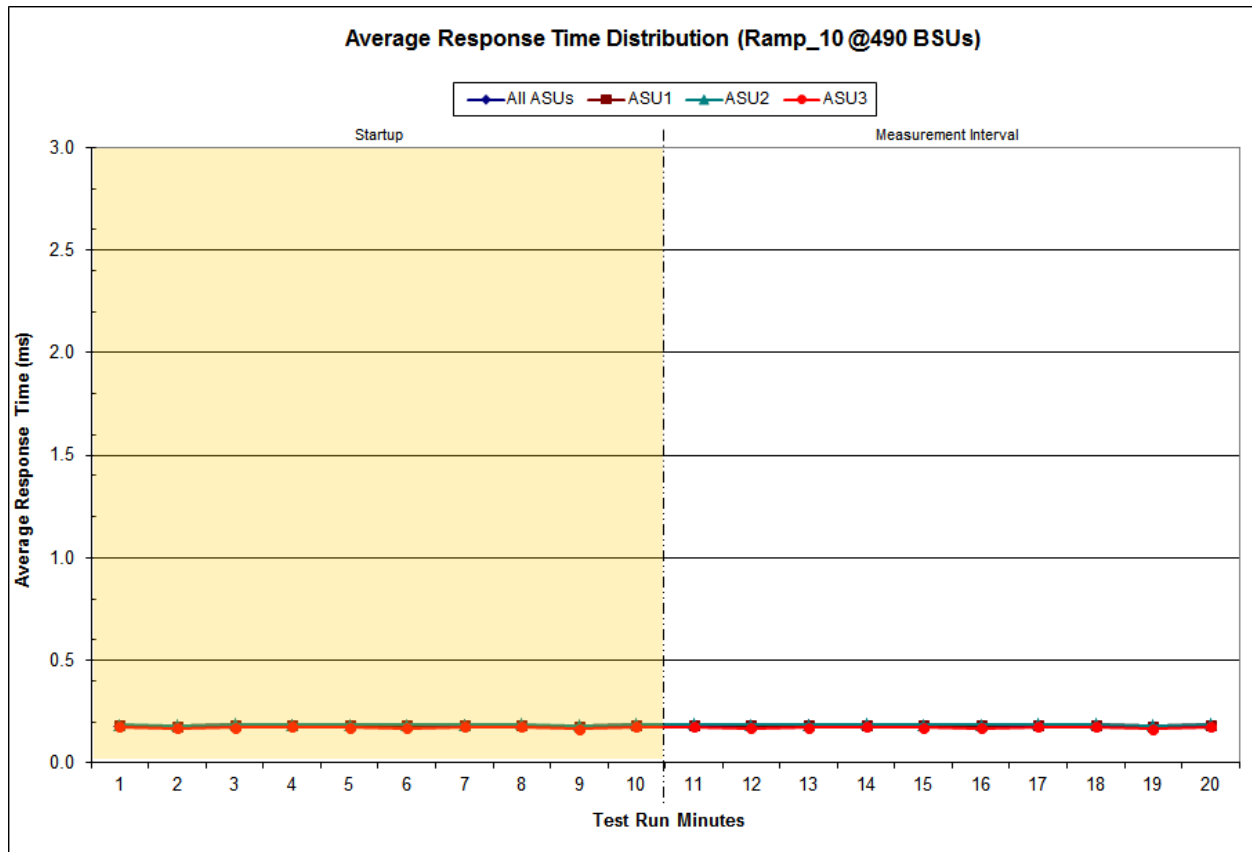

SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0351	0.2810	0.0700	0.2100	0.0181	0.0700	0.0350	0.2808
COV	0.004	0.001	0.002	0.001	0.007	0.002	0.002	0.001

Repeatability Test

Clause 5.4.5

The Repeatability Test demonstrates the repeatability and reproducibility of the SPC-1 IOPS™ primary metric and the SPC-1 LRT™ metric generated in earlier Test Runs.

There are two identical Repeatability Test Phases. Each Test Phase contains two Test Runs. Each of the Test Runs will have a Measurement Interval of no less than ten (10) minutes. The two Test Runs in each Test Phase will be executed without interruption or any type of manual intervention.

The first Test Run in each Test Phase is executed at the 10% load point. The Average Response Time from each of the Test Runs is compared to the SPC-1 LRT™ metric. Each Average Response Time value must be less than the SPC-1 LRT™ metric plus 5% or less than the SPC-1 LRT™ metric plus one (1) millisecond (ms).

The second Test Run in each Test Phase is executed at the 100% load point. The I/O Request Throughput from the Test Runs is compared to the SPC-1 IOPS™ primary metric. Each I/O Request Throughput value must be greater than the SPC-1 IOPS™ primary metric minus 5%. In addition, the Average Response Time for each Test Run cannot exceed 30 milliseconds.

If any of the above constraints are not met, the benchmark measurement is invalid.

Clause 9.4.3.7.5

The following content shall appear in the FDR for each Test Run in the two Repeatability Test Phases:

- 1. A table containing the results of the Repeatability Test.*
- 2. An I/O Request Throughput Distribution graph and table.*
- 3. An Average Response Time Distribution graph and table.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [82](#).

Repeatability Test Results File

The values for the SPC-1 IOPS™, SPC-1 LRT™, and the Repeatability Test measurements are listed in the tables below.

	SPC-1 IOPS™
Primary Metrics	245,011.76
Repeatability Test Phase 1	244,967.45
Repeatability Test Phase 2	245,002.15

The SPC-1 IOPS™ values in the above table were generated using 100% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1 IOPS™ must be greater than 95% of the reported SPC-1 IOPS™ Primary Metric.

	SPC-1 LRT™
Primary Metrics	0.18 ms
Repeatability Test Phase 1	0.18 ms
Repeatability Test Phase 2	0.18 ms

The average response time values in the SPC-1 LRT™ column were generated using 10% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1 LRT™ must be less than 105% of the reported SPC-1 LRT™ Primary Metric or less than the reported SPC-1 LRT™ Primary Metric plus one (1) millisecond (ms).


A link to the test result file generated from each Repeatability Test Run is listed below.

- Repeatability Test Phase 1, Test Run 1 (LRT)**
- Repeatability Test Phase 1, Test Run 2 (IOPS)**
- Repeatability Test Phase 2, Test Run 1 (LRT)**
- Repeatability Test Phase 2, Test Run 2 (IOPS)**

Repeatability 1 LRT – I/O Request Throughput Distribution Data

490 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:02:34	17:12:34	0-9	0:10:00
Measurement Interval	17:12:34	17:22:34	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	24,490.88	14,594.72	3,013.63	6,882.53
1	24,528.45	14,612.30	3,016.58	6,899.57
2	24,492.85	14,600.15	3,013.60	6,879.10
3	24,492.23	14,580.70	3,019.87	6,891.67
4	24,501.12	14,604.87	3,014.15	6,882.10
5	24,521.87	14,638.57	3,015.92	6,867.38
6	24,524.60	14,613.10	3,014.70	6,896.80
7	24,534.48	14,635.18	3,015.77	6,883.53
8	24,512.78	14,596.98	3,010.87	6,904.93
9	24,493.50	14,594.48	3,013.85	6,885.17
10	24,463.18	14,579.42	3,016.90	6,866.87
11	24,445.03	14,566.95	3,014.28	6,863.80
12	24,535.75	14,621.20	3,024.73	6,889.82
13	24,496.65	14,589.65	3,022.07	6,884.93
14	24,508.15	14,604.70	3,015.62	6,887.83
15	24,507.20	14,593.35	3,005.97	6,907.88
16	24,470.23	14,573.53	3,006.93	6,889.77
17	24,511.73	14,609.80	3,012.80	6,889.13
18	24,497.40	14,609.85	3,010.20	6,877.35
19	24,514.15	14,617.00	3,019.35	6,877.80
Average	24,494.95	14,596.55	3,014.89	6,883.52


Repeatability 1 LRT – I/O Request Throughput Distribution Graph

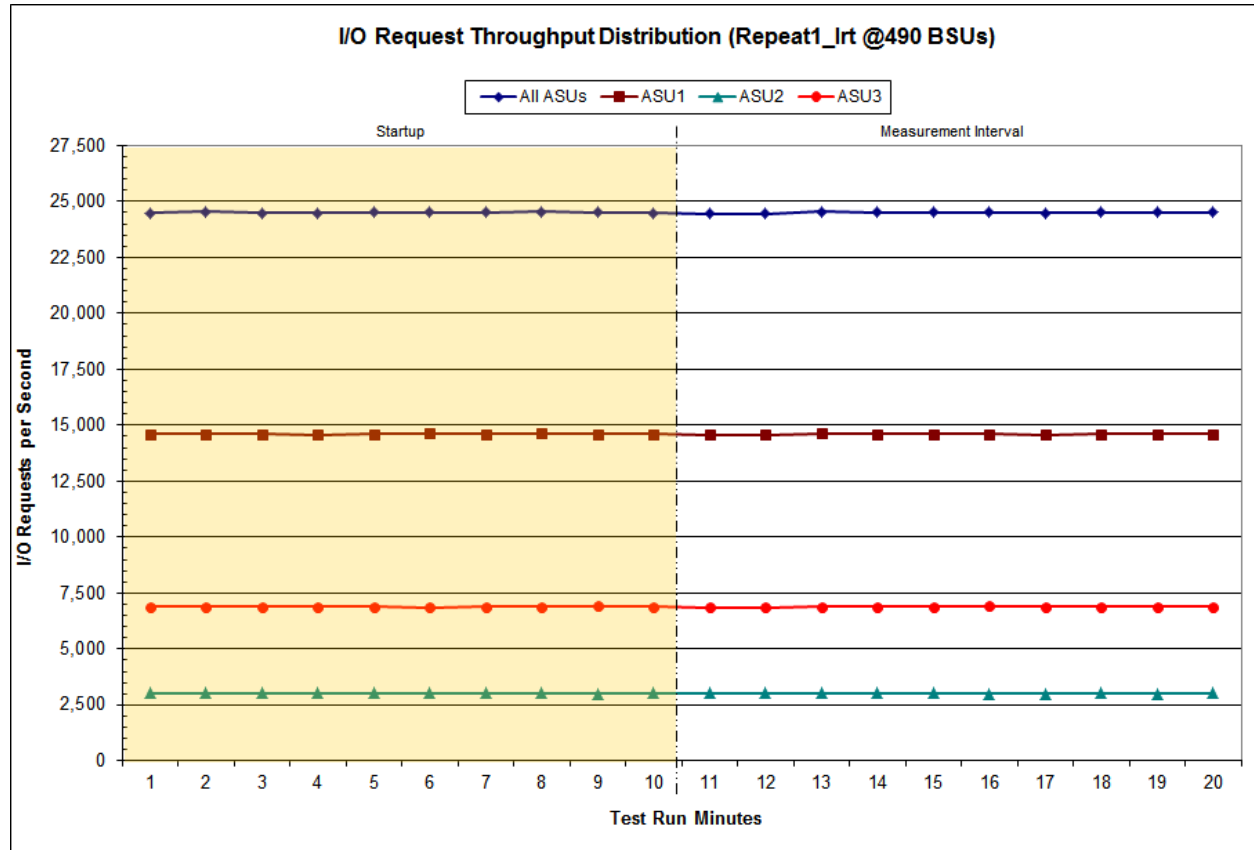

Repeatability 1 LRT –Average Response Time (ms) Distribution Data

490 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:02:34	17:12:34	0-9	0:10:00
Measurement Interval	17:12:34	17:22:34	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.18	0.18	0.19	0.17
1	0.18	0.18	0.19	0.17
2	0.18	0.18	0.18	0.17
3	0.18	0.19	0.19	0.17
4	0.18	0.18	0.19	0.17
5	0.18	0.18	0.18	0.17
6	0.18	0.18	0.19	0.17
7	0.18	0.18	0.19	0.17
8	0.18	0.18	0.19	0.17
9	0.18	0.18	0.18	0.17
10	0.18	0.19	0.19	0.18
11	0.18	0.18	0.19	0.17
12	0.18	0.18	0.18	0.17
13	0.18	0.18	0.19	0.17
14	0.18	0.18	0.19	0.17
15	0.18	0.18	0.18	0.17
16	0.18	0.18	0.19	0.17
17	0.18	0.18	0.19	0.17
18	0.18	0.18	0.19	0.17
19	0.18	0.18	0.18	0.17
Average	0.18	0.18	0.19	0.17


Repeatability 1 LRT –Average Response Time (ms) Distribution Graph

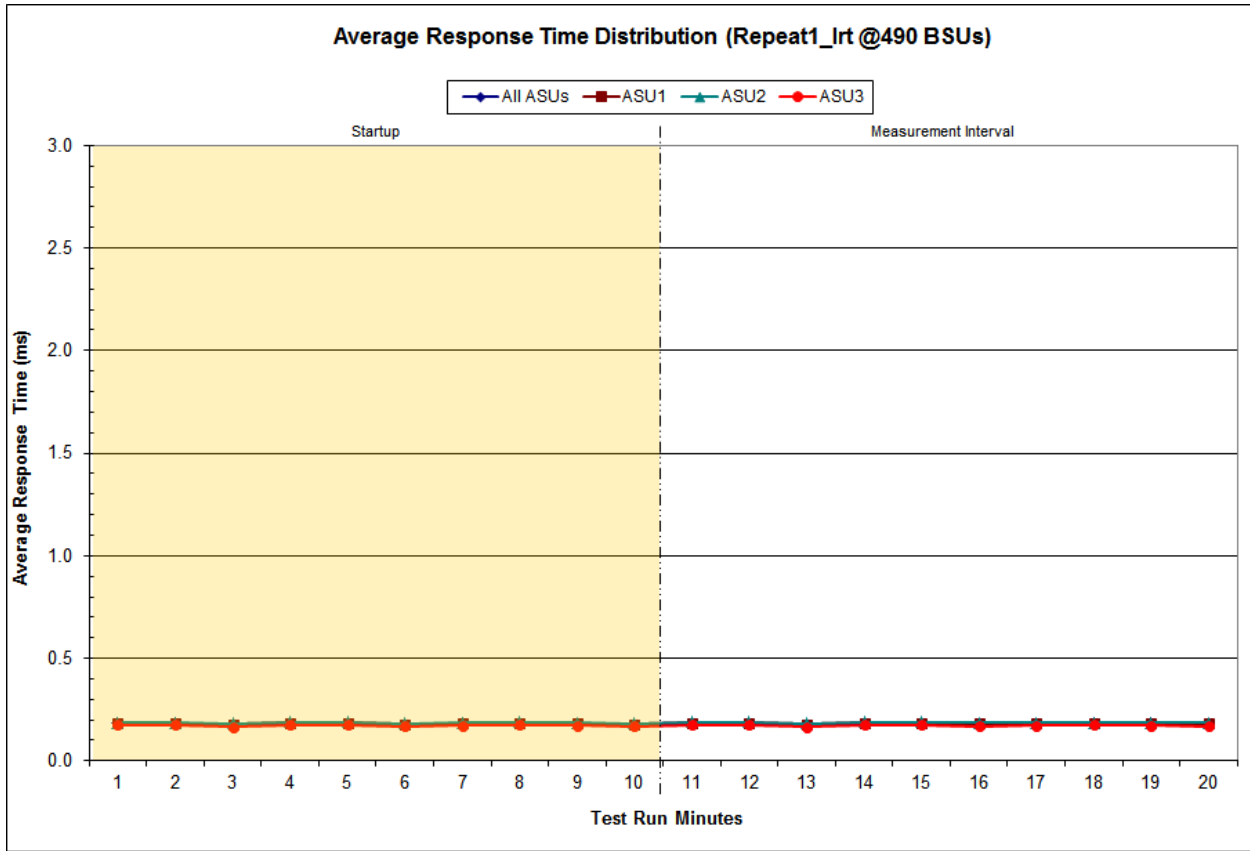

Repeatability 1 IOPS – I/O Request Throughput Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:23:08	17:33:09	0-9	0:10:01
Measurement Interval	17:33:09	17:43:09	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	244,966.25	146,003.68	30,130.83	68,831.73
1	244,958.38	145,991.98	30,152.83	68,813.57
2	245,041.25	145,995.17	30,166.68	68,879.40
3	244,878.25	145,914.18	30,135.05	68,829.02
4	245,038.72	146,059.17	30,140.62	68,838.93
5	245,016.15	146,102.25	30,112.10	68,801.80
6	245,067.50	146,038.20	30,168.20	68,861.10
7	245,015.15	146,047.60	30,143.88	68,823.67
8	245,037.38	146,082.30	30,115.63	68,839.45
9	244,982.90	146,002.12	30,100.45	68,880.33
10	244,929.83	146,020.95	30,100.83	68,808.05
11	244,953.78	145,991.15	30,107.75	68,854.88
12	244,959.38	145,971.45	30,119.32	68,868.62
13	244,986.48	146,031.30	30,115.67	68,839.52
14	244,900.62	145,935.93	30,128.30	68,836.38
15	244,863.98	145,951.93	30,119.07	68,792.98
16	245,097.60	146,127.33	30,149.45	68,820.82
17	244,970.63	145,992.80	30,134.28	68,843.55
18	245,066.93	146,081.57	30,129.82	68,855.55
19	244,945.23	145,979.15	30,114.40	68,851.68
Average	244,967.45	146,008.36	30,121.89	68,837.20


Repeatability 1 IOPS – I/O Request Throughput Distribution Graph

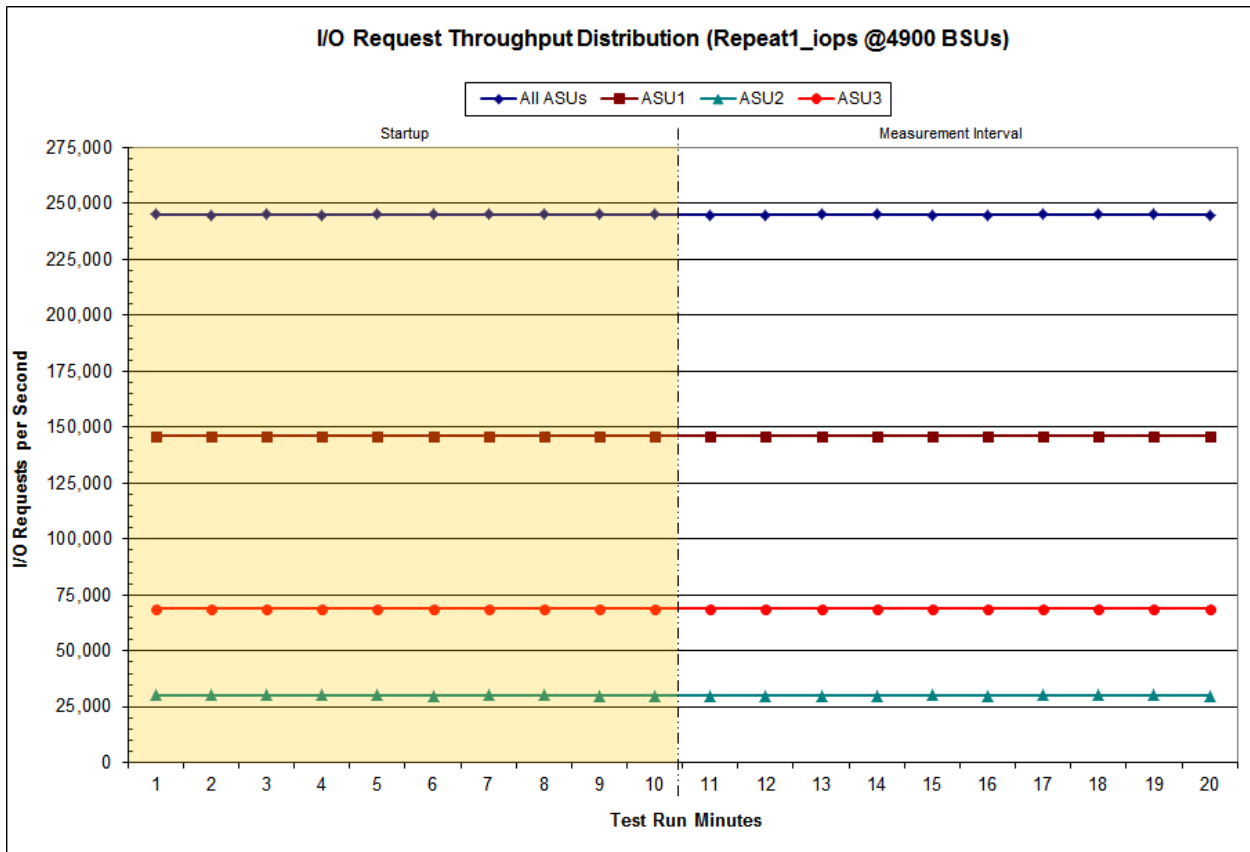

Repeatability 1 IOPS –Average Response Time (ms) Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:23:08	17:33:09	0-9	0:10:01
Measurement Interval	17:33:09	17:43:09	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.95	0.90	0.92	1.06
1	0.94	0.89	0.92	1.06
2	0.93	0.88	0.91	1.03
3	0.93	0.88	0.91	1.03
4	0.96	0.91	0.93	1.08
5	0.94	0.90	0.92	1.05
6	0.92	0.88	0.90	1.02
7	0.94	0.90	0.92	1.06
8	0.96	0.91	0.93	1.07
9	0.93	0.88	0.91	1.03
10	0.94	0.89	0.92	1.05
11	0.96	0.91	0.94	1.08
12	0.93	0.89	0.91	1.03
13	0.93	0.89	0.91	1.03
14	0.95	0.90	0.92	1.07
15	0.94	0.90	0.92	1.05
16	0.92	0.88	0.90	1.02
17	0.95	0.90	0.93	1.07
18	0.96	0.91	0.93	1.08
19	0.92	0.88	0.90	1.02
Average	0.94	0.89	0.92	1.05


Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph

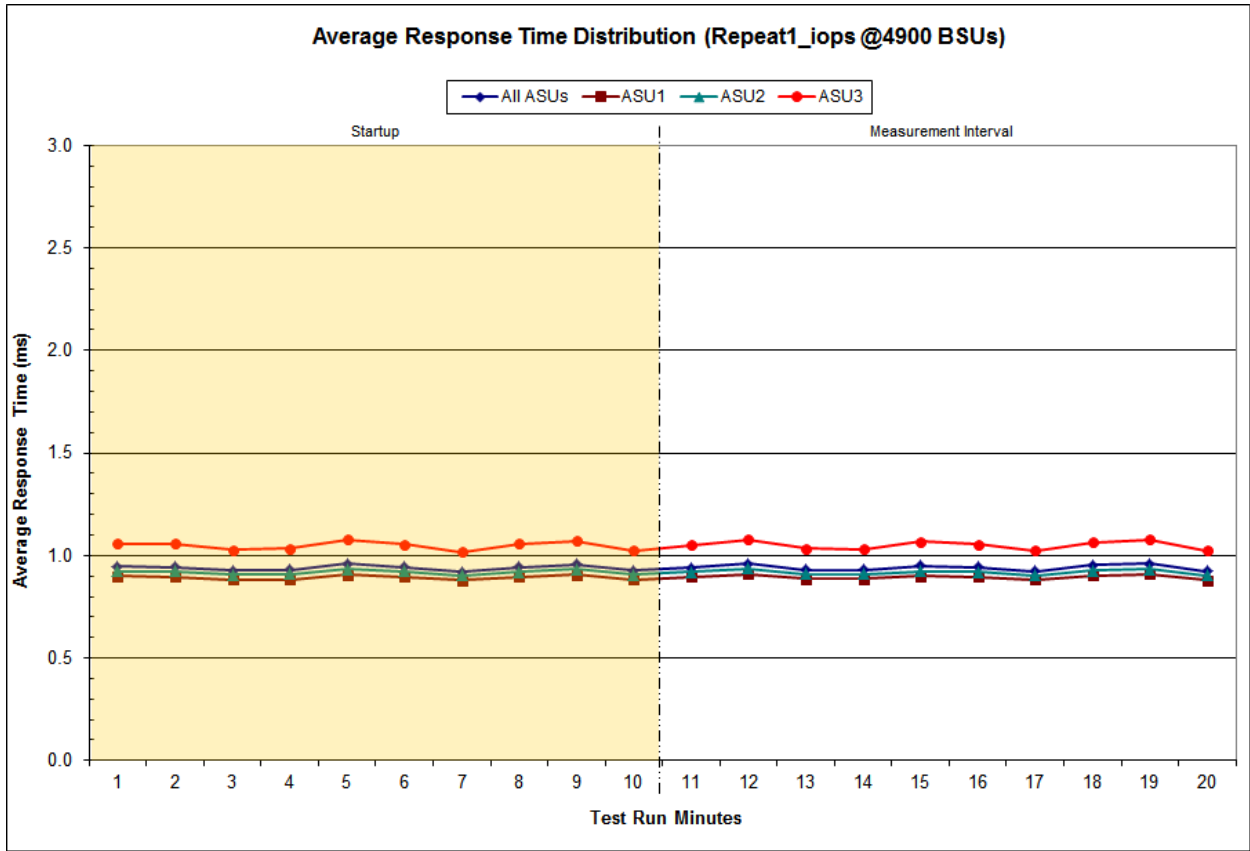

Repeatability 2 LRT – I/O Request Throughput Distribution Data

490 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:43:38	17:53:38	0-9	0:10:00
Measurement Interval	17:53:38	18:03:38	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	24,509.23	14,597.88	3,015.93	6,895.42
1	24,521.55	14,621.22	3,003.87	6,896.47
2	24,531.60	14,619.28	3,020.13	6,892.18
3	24,502.83	14,610.55	3,016.38	6,875.90
4	24,500.20	14,607.40	3,004.35	6,888.45
5	24,493.62	14,598.32	3,010.52	6,884.78
6	24,499.90	14,607.58	3,008.65	6,883.67
7	24,505.55	14,587.03	3,011.67	6,906.85
8	24,507.35	14,612.08	3,007.78	6,887.48
9	24,511.57	14,600.20	3,021.28	6,890.08
10	24,473.15	14,587.97	3,007.00	6,878.18
11	24,465.65	14,591.03	3,010.48	6,864.13
12	24,512.78	14,616.10	3,010.90	6,885.78
13	24,488.32	14,588.02	3,023.32	6,876.98
14	24,487.67	14,582.57	3,010.77	6,894.33
15	24,521.65	14,626.58	3,007.70	6,887.37
16	24,498.93	14,596.67	3,010.72	6,891.55
17	24,511.55	14,616.45	3,009.03	6,886.07
18	24,487.97	14,588.07	3,005.20	6,894.70
19	24,502.70	14,612.30	3,019.67	6,870.73
Average	24,495.04	14,600.58	3,011.48	6,882.98


Repeatability 2 LRT – I/O Request Throughput Distribution Graph

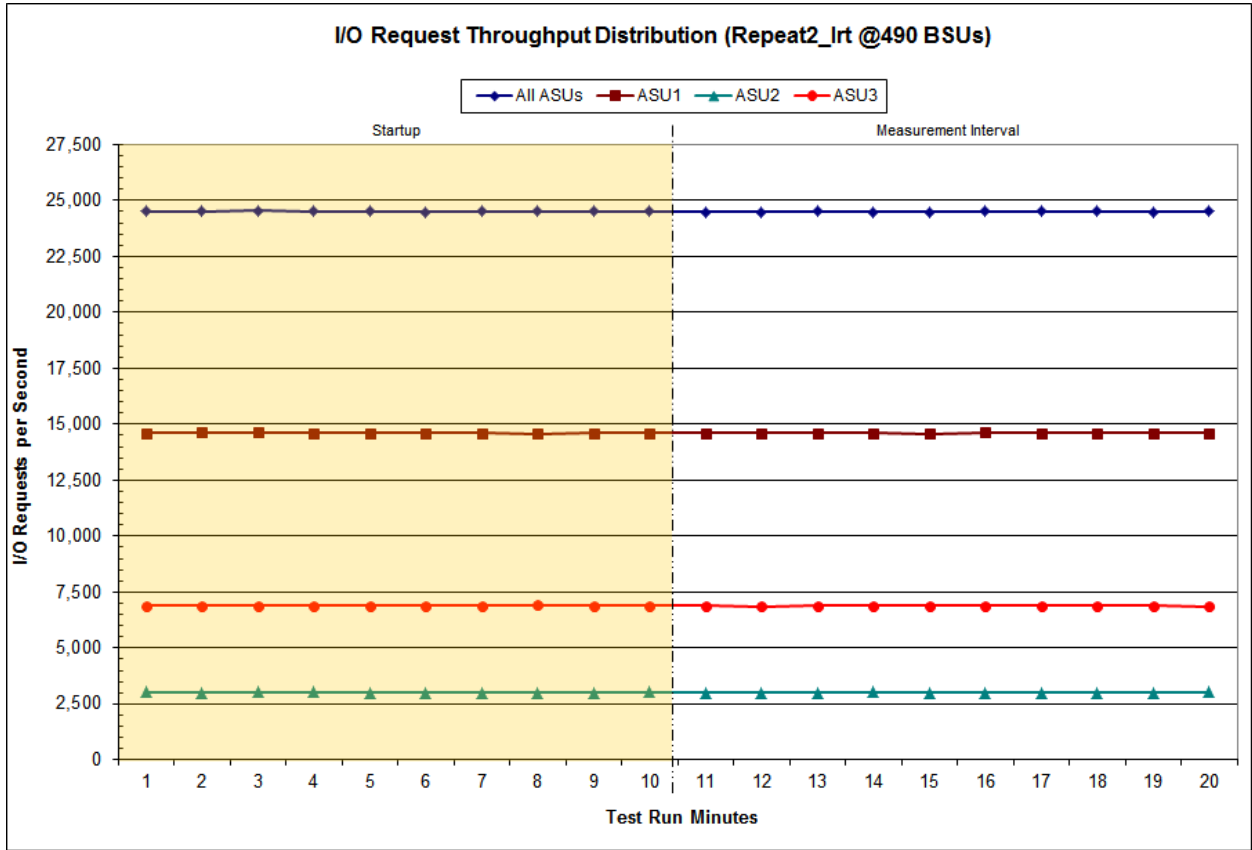

Repeatability 2 LRT –Average Response Time (ms) Distribution Data

490 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	17:43:38	17:53:38	0-9	0:10:00
Measurement Interval	17:53:38	18:03:38	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.18	0.18	0.18	0.17
1	0.18	0.18	0.18	0.17
2	0.18	0.18	0.19	0.17
3	0.18	0.18	0.19	0.17
4	0.18	0.18	0.18	0.17
5	0.18	0.18	0.19	0.17
6	0.18	0.18	0.19	0.17
7	0.18	0.18	0.18	0.17
8	0.18	0.18	0.19	0.17
9	0.18	0.19	0.19	0.17
10	0.18	0.18	0.19	0.17
11	0.18	0.18	0.18	0.17
12	0.18	0.18	0.19	0.18
13	0.18	0.19	0.19	0.17
14	0.18	0.18	0.18	0.17
15	0.18	0.18	0.19	0.17
16	0.18	0.19	0.19	0.17
17	0.18	0.18	0.18	0.17
18	0.18	0.18	0.19	0.17
19	0.18	0.18	0.19	0.17
Average	0.18	0.18	0.19	0.17


Repeatability 2 LRT –Average Response Time (ms) Distribution Graph

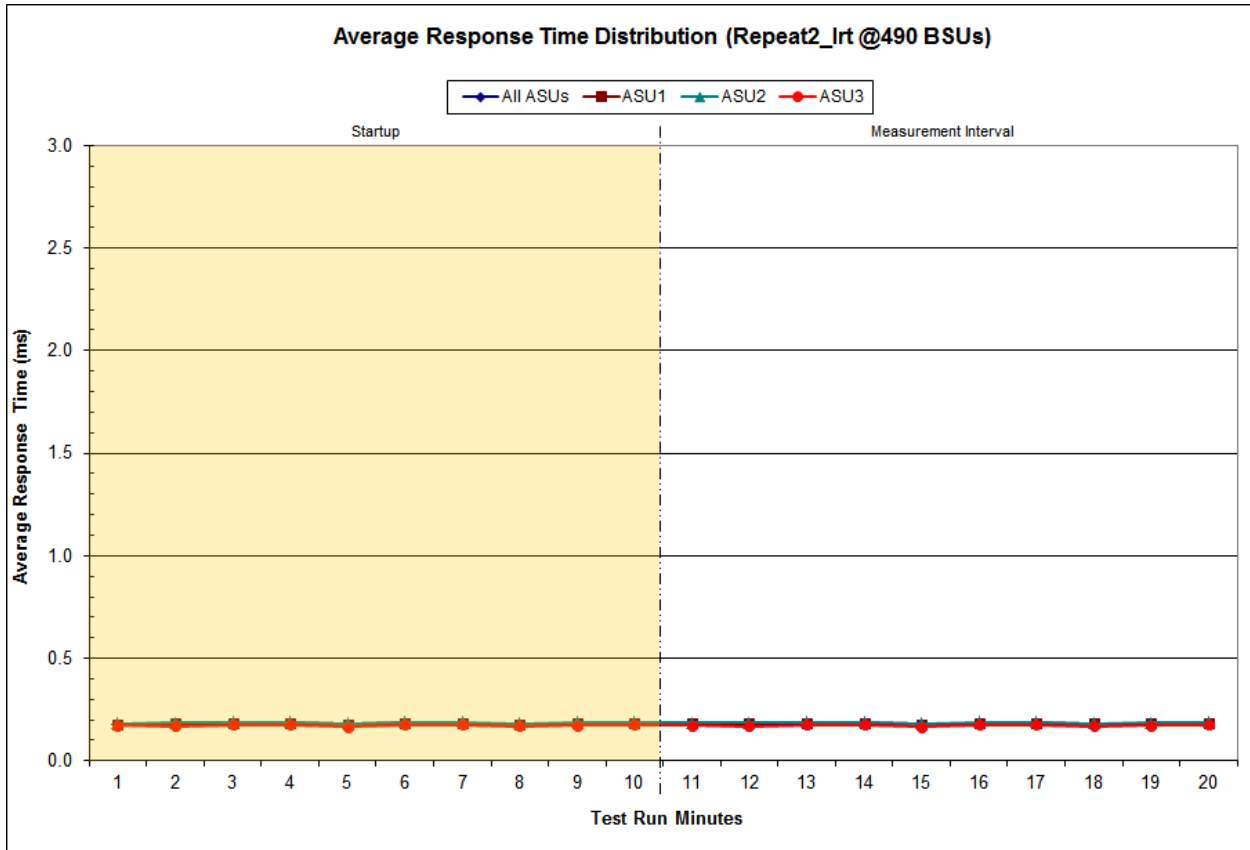

Repeatability 2 IOPS – I/O Request Throughput Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	18:04:14	18:14:15	0-9	0:10:01
Measurement Interval	18:14:15	18:24:15	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	245,003.93	145,966.78	30,169.02	68,868.13
1	244,959.18	146,020.87	30,137.05	68,801.27
2	245,023.13	146,012.35	30,138.45	68,872.33
3	245,136.62	146,114.50	30,140.88	68,881.23
4	245,162.88	146,155.37	30,140.38	68,867.13
5	244,904.07	145,916.92	30,163.60	68,823.55
6	245,049.08	146,008.10	30,157.02	68,883.97
7	244,902.37	145,971.88	30,110.85	68,819.63
8	244,923.53	145,968.85	30,086.70	68,867.98
9	245,099.62	146,121.97	30,119.87	68,857.78
10	244,958.82	145,972.23	30,122.05	68,864.53
11	245,015.22	146,040.35	30,123.88	68,850.98
12	245,005.60	145,989.07	30,135.37	68,881.17
13	245,047.80	146,007.53	30,127.35	68,912.92
14	245,051.92	146,035.98	30,150.48	68,865.45
15	245,043.72	146,048.12	30,130.75	68,864.85
16	245,020.98	145,996.40	30,145.23	68,879.35
17	245,045.93	146,072.55	30,109.72	68,863.67
18	244,946.88	145,984.25	30,105.57	68,857.07
19	244,884.58	145,979.28	30,139.98	68,765.32
Average	245,002.15	146,012.58	30,129.04	68,860.53


Repeatability 2 IOPS – I/O Request Throughput Distribution Graph

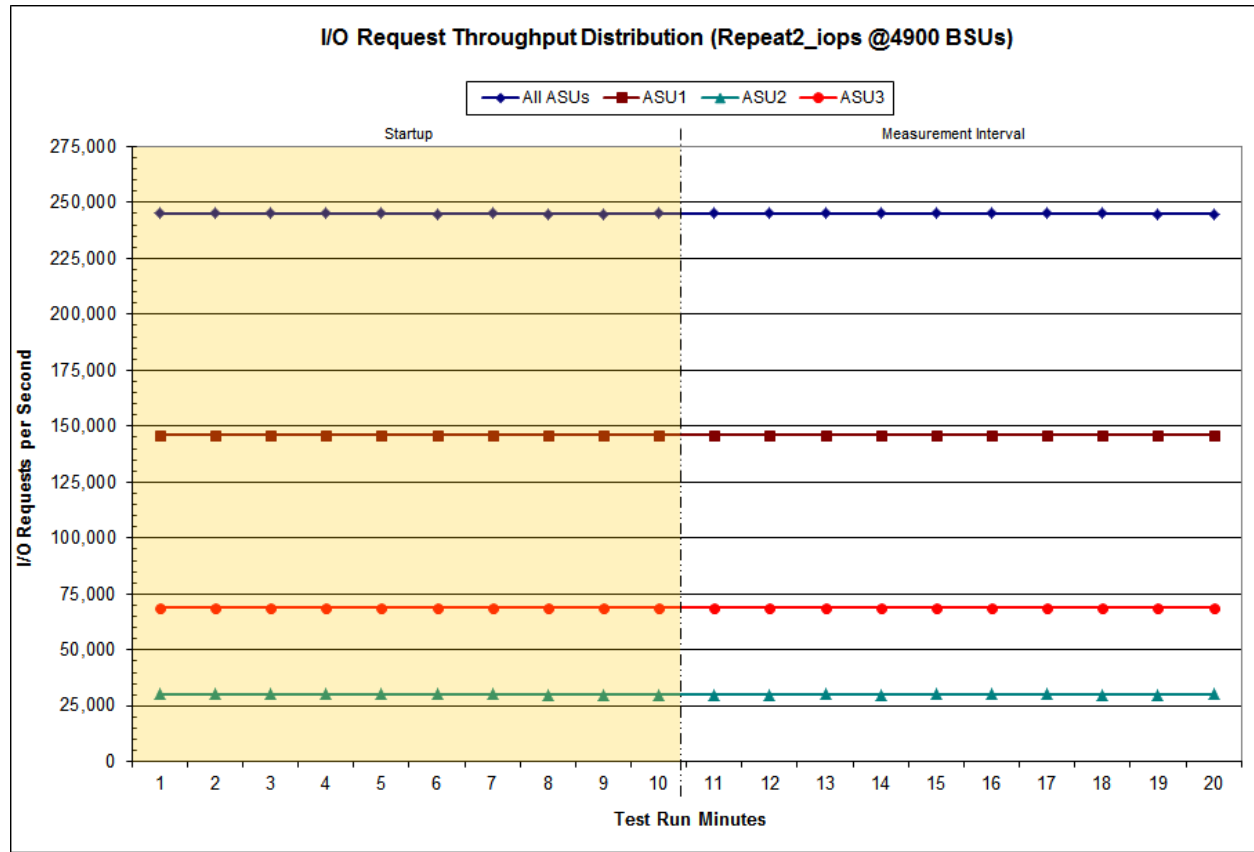

Repeatability 2 IOPS –Average Response Time (ms) Distribution Data

4,900 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	18:04:14	18:14:15	0-9	0:10:01
Measurement Interval	18:14:15	18:24:15	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.97	0.92	0.95	1.09
1	0.96	0.91	0.93	1.08
2	0.93	0.88	0.91	1.03
3	0.93	0.89	0.92	1.04
4	0.96	0.91	0.94	1.08
5	0.93	0.89	0.91	1.04
6	0.93	0.88	0.91	1.03
7	0.95	0.90	0.93	1.07
8	0.95	0.90	0.92	1.06
9	0.92	0.88	0.90	1.02
10	0.94	0.89	0.92	1.04
11	0.95	0.90	0.93	1.07
12	0.94	0.89	0.91	1.04
13	0.93	0.89	0.91	1.04
14	0.96	0.91	0.93	1.08
15	0.95	0.90	0.92	1.06
16	0.92	0.88	0.90	1.02
17	0.95	0.90	0.93	1.06
18	0.96	0.91	0.93	1.07
19	0.92	0.88	0.90	1.02
Average	0.94	0.89	0.92	1.05

Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph

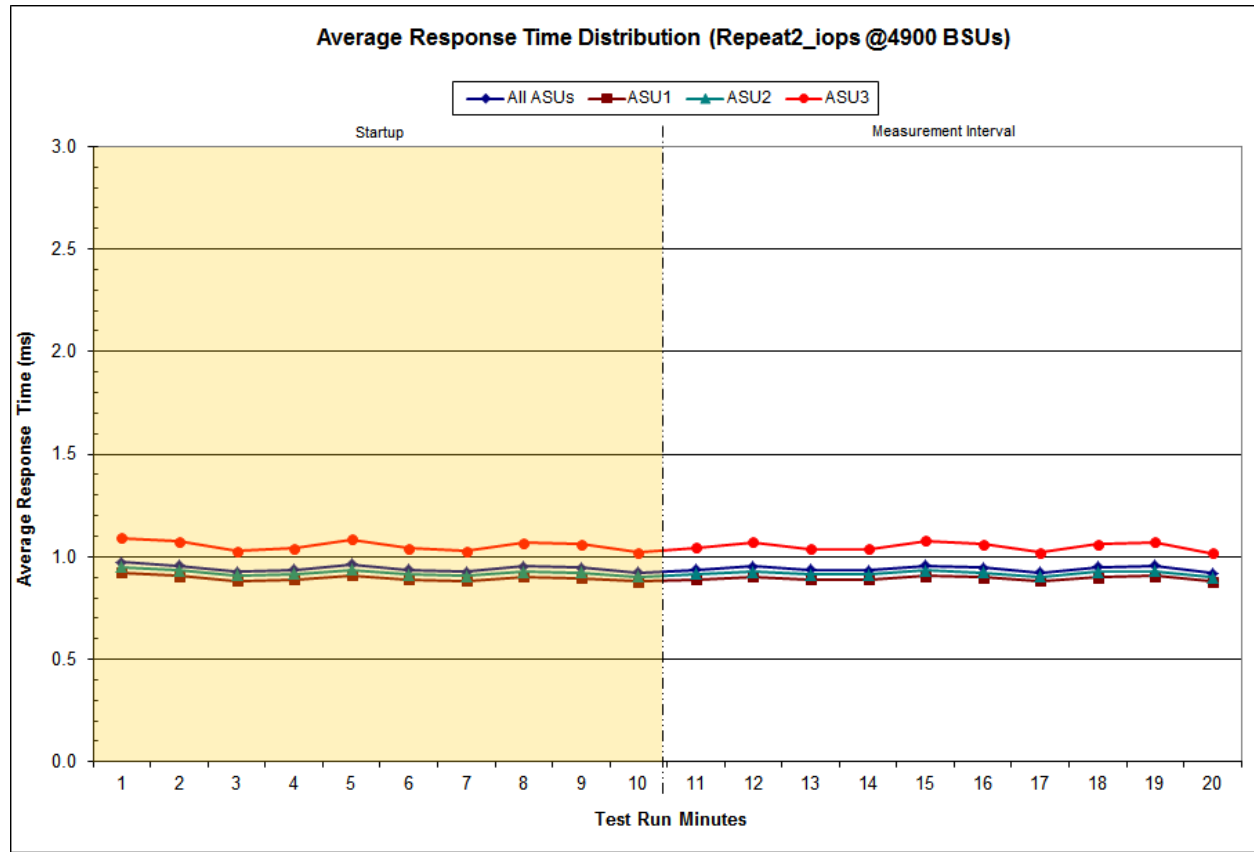

Repeatability 1 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2811	0.0700	0.2099	0.0180	0.0701	0.0350	0.2810
COV	0.004	0.001	0.004	0.002	0.003	0.002	0.004	0.001

Repeatability 1 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.002	0.000	0.001	0.000	0.002	0.001	0.001	0.000

Repeatability 2 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2809	0.701	0.2101	0.0180	0.0700	0.0349	0.2810
COV	0.004	0.001	0.003	0.001	0.006	0.002	0.004	0.001

Repeatability 2 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<i>IM</i>	<i>0.0350</i>	<i>0.2810</i>	<i>0.0700</i>	<i>0.2100</i>	<i>0.0180</i>	<i>0.0700</i>	<i>0.0350</i>	<i>0.2810</i>
MIM	0.0350	0.2180	0.0700	0.2100	0.0180	0.0700	0.0350	0.2811
COV	0.001	0.000	0.001	0.001	0.002	0.001	0.001	0.000

Data Persistence Test

Clause 6

The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

The SPC-1 Workload Generator will write 16 block I/O requests at random over the total Addressable Storage Capacity of the TSC for ten (10) minutes at a minimum of 25% of the load used to generate the SPC-1 IOPS™ primary metric. The bit pattern selected to be written to each block as well as the address of the block will be retained in a log file.

The Tested Storage Configuration (TSC) will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.

The SPC-1 Workload Generator will then use the above log file to verify each block written contains the correct bit pattern.

Clause 9.4.3.8

The following content shall appear in this section of the FDR:

1. *A listing or screen image of all input parameters supplied to the Workload Generator.*
2. *For the successful Data Persistence Test Run, a table illustrating key results. The content, appearance, and format of this table are specified in Table 9-12. Information displayed in this table shall be obtained from the Test Run Results File referenced below in #3.*
3. *For the successful Data Persistence Test Run, the human readable Test Run Results file produced by the Workload Generator (may be contained in an appendix).*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [82](#).

Data Persistence Test Results File

A link to each test result file generated from each Data Persistence Test is listed below.

[Persistence 1 Test Results File](#)

[Persistence 2 Test Results File](#)

Data Persistence Test Results

Data Persistence Test Results	
Data Persistence Test Run Number: 1	
Total Number of Logical Blocks Written	699,192
Total Number of Logical Blocks Verified	642,377
Total Number of Logical Blocks that Failed Verification	0
Time Duration for Writing Test Logical Blocks	5 minutes
Size in bytes of each Logical Block	1024
Number of Failed I/O Requests in the process of the Test	0

If approved by the SPC Auditor, the SPC-2 Persistence Test may be used to meet the SPC-1 persistence requirements. Both the SPC-1 and SPC-2 Persistence Tests provide the same level of functionality and verification of data integrity. The SPC-2 Persistence Test may be easily configured to address an SPC-1 storage configuration. The SPC-2 Persistence Test extends the size of storage configurations that may be tested and significantly reduces the test duration of such configurations.

The SPC-2 Persistence Test was approved for use in this set of audited measurements.

In some cases the same address was the target of multiple writes, which resulted in more Logical Blocks Written than Logical Blocks Verified. In the case of multiple writes to the same address, the pattern written and verified must be associated with the last write to that address.

PRICED STORAGE CONFIGURATION AVAILABILITY DATE

Clause 9.4.3.9

The committed delivery data for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date for the Priced Storage Configuration must be the date at which all components are committed to be available.

The NetApp EF560 Storage System as documented in this Full Disclosure Report will become available on March 23, 2015 for customer purchase and shipment.

PRICING INFORMATION

Clause 9.4.3.3.6

The Executive Summary shall contain a pricing spreadsheet as documented in Clause 8.3.1.

Pricing information may be found in the Priced Storage Configuration Pricing section on page 16.

TESTED STORAGE CONFIGURATION (TSC) AND PRICED STORAGE CONFIGURATION DIFFERENCES

Clause 9.4.3.3.8

The Executive Summary shall contain a list of all differences between the Tested Storage Configuration (TSC) and the Priced Storage Configuration.

A list of all differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration may be found in the Executive Summary portion of this document on page 16.

ANOMALIES OR IRREGULARITIES

Clause 9.4.3.10

The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-1 benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in this FDR.

There were no anomalies or irregularities encountered during the SPC-1 Remote Audit of the NetApp EF560 Storage System.

APPENDIX A: SPC-1 GLOSSARY

“Decimal” (*powers of ten*) Measurement Units

In the storage industry, the terms “kilo”, “mega”, “giga”, “tera”, “peta”, and “exa” are commonly used prefixes for computing performance and capacity. For the purposes of the SPC workload definitions, all of the following terms are defined in “powers of ten” measurement units.

A kilobyte (KB) is equal to 1,000 (10^3) bytes.

A megabyte (MB) is equal to 1,000,000 (10^6) bytes.

A gigabyte (GB) is equal to 1,000,000,000 (10^9) bytes.

A terabyte (TB) is equal to 1,000,000,000,000 (10^{12}) bytes.

A petabyte (PB) is equal to 1,000,000,000,000,000 (10^{15}) bytes

An exabyte (EB) is equal to 1,000,000,000,000,000,000 (10^{18}) bytes

“Binary” (*powers of two*) Measurement Units

The sizes reported by many operating system components use “powers of two” measurement units rather than “power of ten” units. The following standardized definitions and terms are also valid and may be used in this document.

A kibibyte (KiB) is equal to 1,024 (2^{10}) bytes.

A mebibyte (MiB) is equal to 1,048,576 (2^{20}) bytes.

A gibibyte (GiB) is equal to 1,073,741,824 (2^{30}) bytes.

A tebibyte (TiB) is equal to 1,099,511,627,776 (2^{40}) bytes.

A pebibyte (PiB) is equal to 1,125,899,906,842,624 (2^{50}) bytes.

An exbibyte (EiB) is equal to 1,152,921,504,606,846,967 (2^{60}) bytes.

SPC-1 Data Repository Definitions

Total ASU Capacity: The total storage capacity read and written in the course of executing the SPC-1 benchmark.

Application Storage Unit (ASU): The logical interface between the storage and SPC-1 Workload Generator. The three ASUs (Data, User, and Log) are typically implemented on one or more Logical Volume.

Logical Volume: The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-1 benchmark. Each Logical Volume is implemented as a single, contiguous address space.

Addressable Storage Capacity: The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-1 Workload Generator.

Configured Storage Capacity: This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

Physical Storage Capacity: The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

Data Protection Overhead: The storage capacity required to implement the selected level of data protection.

Required Storage: The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the three ASUs.

Global Storage Overhead: The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

Total Unused Storage: The amount of storage capacity available for use by application programs but not included in the Total ASU Capacity.

SPC-1 Data Protection Levels

Protected 1: The single point of failure of any *storage device* in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.

Protected 2: The single point of failure of any *component* in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.

SPC-1 Test Execution Definitions

Average Response Time: The sum of the Response Times for all Measured I/O Requests divided by the total number of Measured I/O Requests.

Completed I/O Request: An I/O Request with a Start Time and a Completion Time (see “I/O Completion Types” below).

Completion Time: The time recorded by the Workload Generator when an I/O Request is satisfied by the TSC as signaled by System Software.

Data Rate: The data transferred in all Measured I/O Requests in an SPC-1 Test Run divided by the length of the Test Run in seconds.

Expected I/O Count: For any given I/O Stream and Test Phase, the product of 50 times the BSU level, the duration of the Test Phase in seconds, and the Intensity Multiplier for that I/O Stream.

Failed I/O Request: Any I/O Request issued by the Workload Generator that could not be completed or was signaled as failed by System Software. A Failed I/O Request has no Completion Time (see “I/O Completion Types” below).

I/O Request Throughput: The total number of Measured I/O requests in an SPC-1 Test Run divided by the duration of the Measurement Interval in seconds.

In-Flight I/O Request: An I/O Request issued by the I/O Command Generator to the TSC that has a recorded Start Time, but does not complete within the Measurement Interval (see “I/O Completion Types” below).

Measured I/O Request: A Completed I/O Request with a Completion Time occurring within the Measurement Interval (see “I/O Completion Types” below).

Measured Intensity Multiplier: The percentage of all Measured I/O Requests that were issued by a given I/O Stream.

Measurement Interval: The finite and contiguous time period, after the TSC has reached Steady State, when data is collected by a Test Sponsor to generate an SPC-1 test result or support an SPC-1 test result.

Ramp-Up: The time required for the Benchmark Configuration (BC) to produce Steady State throughput after the Workload Generator begins submitting I/O Requests to the TSC for execution.

Ramp-Down: The time required for the BC to complete all I/O Requests issued by the Workload Generator. The Ramp-Down period begins when the Workload Generator ceases to issue new I/O Requests to the TSC.

Response Time: The Response Time of a Measured I/O Request is its Completion Time minus its Start Time.

Start Time: The time recorded by the Workload Generator when an I/O Request is submitted, by the Workload Generator, to the System Software for execution on the Tested Storage Configuration (TSC).

Start-Up: The period that begins after the Workload Generator starts to submit I/O requests to the TSC and ends at the beginning of the Measurement Interval.

Shut-Down: The period between the end of the Measurement Interval and the time when all I/O Requests issued by the Workload Generator have completed or failed.


Steady State: The consistent and sustainable throughput of the TSC. During this period the load presented to the TSC by the Workload Generator is constant.

Test: A collection of Test Phases and or Test Runs sharing a common objective.


Test Run: The execution of SPC-1 for the purpose of producing or supporting an SPC-1 test result. SPC-1 Test Runs may have a finite and measured Ramp-Up period, Start-Up period, Shut-Down period, and Ramp-Down period as illustrated in the “SPC-1 Test Run Components” below. All SPC-1 Test Runs shall have a Steady State period and a Measurement Interval.

Test Phase: A collection of one or more SPC-1 Test Runs sharing a common objective and intended to be run in a specific sequence.

I/O Completion Types

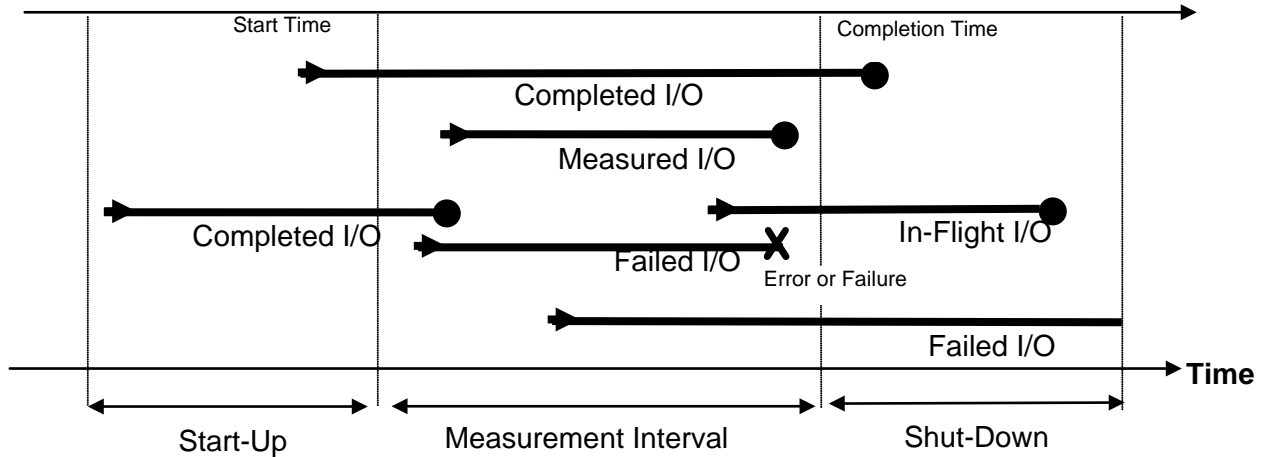

SPC-1 Test Run Components

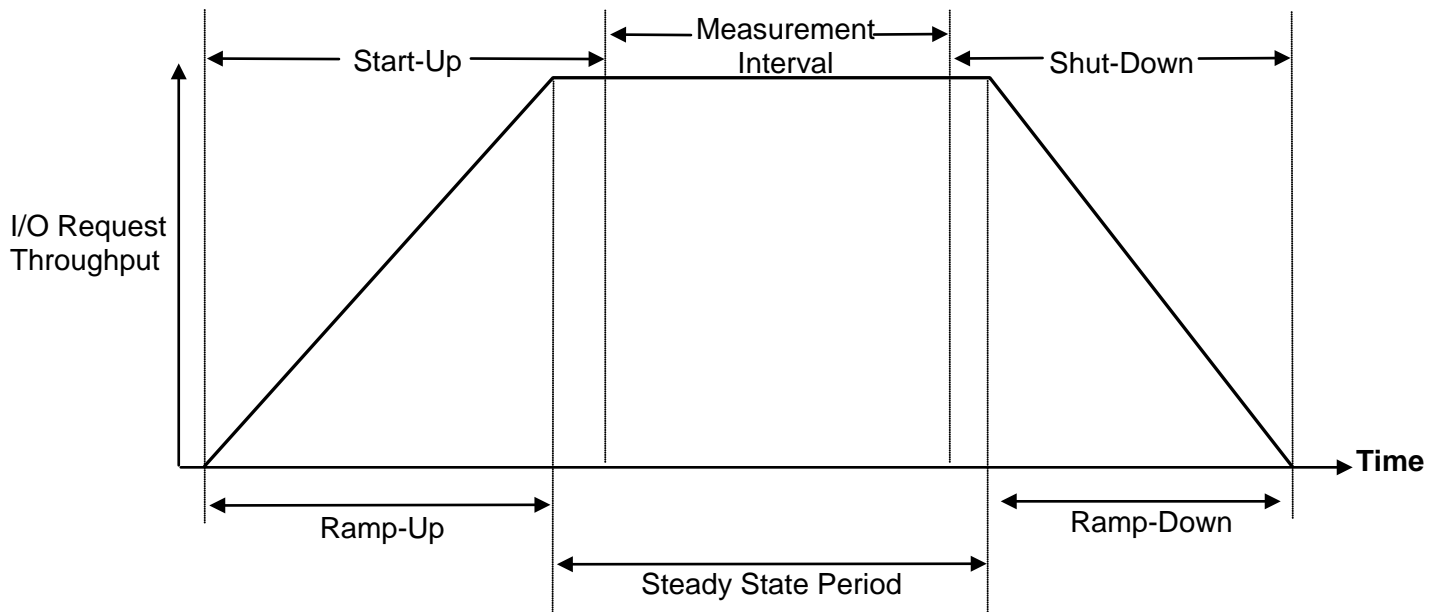

APPENDIX B: CUSTOMER TUNABLE PARAMETERS AND OPTIONS

HBA Parameters

The following QLogic Fibre Channel HBA parameters/options were changed from their default values using the **QConvergeConsole CLI** utility:

	Default Value	New Value
Operation Mode	<i>Interrupt when Interrupt Delay Timer expires or no active IO</i>	<i>Interrupt for every IO Completion</i>
LUNs Per Target	8	128
Port Down Retry Count	30	70

Operation Mode: Disable HBA interrupt coalescing.

LUNs Per Target: Specifies the number of LUNs per target.

Port Down Retry Count: Specifies the number of times the driver retries a command to a port returning port down status.

Windows Registry Settings

- **Enable full 64 bit addressing support in QLogic driver**
Default: **disabled**
 - **HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\ql2300\Parameters\Supports64BitAddressing=1**
 - **HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\ql2300\Parameters\Device\DriverParameter\Supports64BitAddressing=1**
- **Set maximum queue depth in QLogic driver to 254**
Default: **32**
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\ql2300\Parameters\Device\DriverParameter\qd=254

APPENDIX C: TESTED STORAGE CONFIGURATION (TSC) CREATION

QLogic HBA Parameters

The QLogic HBA parameters/options, documented in [Appendix B, HBA Parameters](#), are changed prior to creating volumes on the storage array.

Windows Registry Settings

The Windows registry settings, documented in [Appendix B, Windows Registry Settings](#), may be changed prior to or after creating volumes on the storage array.

Storage Array Volume Creation

The storage management utility software, **SANtricity**, is installed on both Host Systems. It is a required software package that provides configuration, monitoring, and failover path management. The software is installed as a Windows installable package.

After installation, it can be found in **\Program Files (x86)\StorageManager\client** and is typically started with **Start→All Programs→SANtricity Storage Manager →SANtricity Storage Manager client**.

The **SANtricity Storage Manager** was used to create 3 volume groups on the storage subsystem. Each volume group contains two RAID1 (*mirrored*) volumes. All 6 RAID1 volumes are visible by each Host System.

The physical storage volumes are created on the storage array using the **SANtricity Storage Manager** script editor as follows:

- Launch **SANtricity Storage Manager**.
- From the Enterprise Management window, right-click the name of the storage array that you will be creating volumes on and select **Execute Script** from the pop-up menu.
- In the Script Editor window, load the [SPC1 RAID Config.script](#) script (*listed at the end of this appendix*).
- Once the script is loaded, select **Execute** from the Tools menu.

SPC-1 Logical Volume Creation

The steps that follow are executed on a single Host System to define the Windows partitions, volumes, and stripe sets that comprise the SPC-1 Logical Volumes/Application Storage Units (ASUs).

1. Start the Windows Disk Administrator, which will automatically discover the six RAID volumes, and then exit the Disk Administrator.
2. Use **diskpar.exe** to set the starting offset for each of the storage system volumes. Starting offset is 65536 sectors (*512 bytes per sector*). Use all of the remaining capacity to create a single volume in each partition.
3. Start the Disk Management utility under Computer Management.
4. Convert all of the storage system volumes to Dynamic Disks.
5. Create a Windows Striped (RAID 0) volume using all six 32 MB partitions.
6. Delete the remaining large volume on each of the Dynamic Disks.
7. Create a Windows Striped (RAID 0) volume for ASU 3.
 - a. Select all six volumes.
 - b. Set capacity to 71,574 MB (*MiB*).
 - c. Assign drive letter “T” to the volume. Do not format the volume.
8. Create a Windows Striped (RAID 0) volume for ASU 1.
 - a. Select all six volumes.
 - b. Set capacity to 322,083 MB (*MiB*).
 - c. Assign drive letter “R” to the volume. Do not format the volume.
9. Create a Windows Striped (RAID 0) volume for ASU 2.
 - a. Select all six volumes.
 - b. Set capacity to 322,083 MB (*MiB*).
 - c. Assign drive letter “S” to the volume. Do not format the volume.
10. Reboot the Host Systems.
11. After each reboot completes, start the Disk Administrator utility on each of the Host Systems.
12. On each Host System, select either the import foreign disk or reactivate Windows stripe sets option, as necessary, then assign drive letters to the stripe sets as they were assigned in steps 7-9 above.

SPC1_RAID_Config.script

```
/* SPC-1 RAID Volume Configuration Script */

create volume drives[ 0,1 0,2 0,3 0,4 0,5 0,6 0,7 0,8 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_0"
volumeGroupUserLabel="VG_0"
capacity=699 gb
owner = A;

create volume volumeGroup["VG_0"] RAIDLevel=1 segmentSize=128 userLabel="LUN_1"
capacity=699 gb owner = b;

create volume drives[ 0,9 0,10 0,11 0,12 0,13 0,14 0,15 0,16 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_2"
volumeGroupUserLabel="VG_1"
capacity=699 gb
owner = b;

create volume volumeGroup["VG_1"] RAIDLevel=1 segmentSize=128 userLabel="LUN_3"
capacity=699 gb owner = A;

create volume drives[ 0,17 0,18 0,19 0,20 0,21 0,22 0,23 0,24 ]
RAIDLevel=1
segmentSize=128
userLabel="LUN_4"
volumeGroupUserLabel="VG_2"
capacity=699 gb
owner = A;

create volume volumeGroup["VG_2"] RAIDLevel=1 segmentSize=128 userLabel="LUN_5"
capacity=699 gb owner = b;

/* define host mappings */
set volume["LUN_0"] logicalUnitNumber=0 hostGroup=defaultGroup;
set volume["LUN_1"] logicalUnitNumber=1 hostGroup=defaultGroup;
set volume["LUN_2"] logicalUnitNumber=2 hostGroup=defaultGroup;
set volume["LUN_3"] logicalUnitNumber=3 hostGroup=defaultGroup;
set volume["LUN_4"] logicalUnitNumber=4 hostGroup=defaultGroup;
set volume["LUN_5"] logicalUnitNumber=5 hostGroup=defaultGroup;

set allVolumes mirrorEnabled = True writeCacheEnabled = True
cacheWithoutBatteryEnabled = False cacheReadPrefetch = False;

set storageArray cacheBlockSize = 16;
```

APPENDIX D: SPC-1 WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETERS

ASU Pre-Fill

The content of command and parameter file, used in this benchmark to execute the required ASU pre-fill, is listed below.

```
* SPC-1 Pre-Fill
* 512K sequential writes

*pattern=random
*compression=100          * vdBench version 5.02
compratio=1.0            * vdBench version 5.03

sd=sd1,lun=\\.R:,threads=4
sd=sd2,lun=\\.S:,threads=4
sd=sd3,lun=\\.T:,threads=4

wd=wd1,sd=sd1,xfersize=524288,readpct=0,seekpct=-1
wd=wd2,sd=sd2,xfersize=524288,readpct=0,seekpct=-1
wd=wd3,sd=sd3,xfersize=524288,readpct=0,seekpct=-1

rd=rd1,wd=wd*,elapsed=36000,interval=10,iorate=max
```

Primary Metrics and Repeatability Tests

The content of SPC-1 Workload Generator command and parameter file used in this benchmark to execute the Primary Metrics (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*) and Repeatability (*Repeatability Test Phase 1 and Repeatability Test Phase 2*) Tests is listed below.

```
* spc1.cfg

host=master

* For 56 JVM's
slaves=(bmr720a_s1,bmr720a_s2,bmr720a_s3,bmr720a_s4,bmr720a_s5,bmr720a_s6,bmr720a_s7,bmr720a_s8
,bmr720a_s9,bmr720a_s10,bmr720a_s11,bmr720a_s12,bmr720a_s13,bmr720a_s14,bmr720a_s15,bmr720a_s1
6,bmr720a_s17,bmr720a_s18,bmr720a_s19,bmr720a_s20,bmr720a_s21,bmr720a_s22,bmr720a_s23,bmr720a
_s24,bmr720a_s25,bmr720a_s26,bmr720a_s27,bmr720a_s28,bmr720b_s1,bmr720b_s2,bmr720b_s3,bmr720b_s
4,bmr720b_s5,bmr720b_s6,bmr720b_s7,bmr720b_s8,bmr720b_s9,bmr720b_s10,bmr720b_s11,bmr720b_s12,b
mr720b_s13,bmr720b_s14,bmr720b_s15,bmr720b_s16,bmr720b_s17,bmr720b_s18,bmr720b_s19,bmr720b_s20
,bmr720b_s21,bmr720b_s22,bmr720b_s23,bmr720b_s24,bmr720b_s25,bmr720b_s26,bmr720b_s27,bmr720b_s
28)

javaparms="-Xmx384m -Xms384m"

sd=asu1_1,lun=\\.R:,size=2026371022848
sd=asu2_1,lun=\\.S:,size=2026371022848
sd=asu3_1,lun=\\.T:,size=450304671744
```

SPC-1 Persistence Test Run 1

The content of SPC-1 Workload Generator command and parameter file, used in this benchmark to execute a reduced level SPC-1 Persistence Test Run 1, is listed below.

```
* spc1_persist.cfg

javaparms="-Xmx640m -Xms640m"

sd=asu1_1,lun=\\.R:,size=2026371022848
sd=asu2_1,lun=\\.S:,size=2026371022848
sd=asu3_1,lun=\\.T:,size=450304671744
```

Slave JVMs

Each Slave JVM was invoked with a command and parameter file similar to the example listed below. The only difference in each file was **host** parameter value, which was unique to each Slave JVM, e.g. **bmr720a_s1... bmr720b_s28**.

```
*slave1.parm

host=bmr720a_s1
master=bmr720a

eof
```


SPC-2 Persistence Test

If approved by the SPC Auditor, the SPC-2 Persistence Test may be used to meet the SPC-1 persistence requirements. Both the SPC-1 and SPC-2 Persistence Tests provide the same level of functionality and verification of data integrity.

SPC-2 Persistence Test Run 1 (*write phase*)

* SPC-1 Persistence Write Phase using SPC-2

host=localhost,jvms=1,maxstreams=200

sd=sd1,host=localhost,lun=\\.R:,size=2026371022848

sd=sd2,host=localhost,lun=\\.S:,size=2026371022848

sd=sd3,host=localhost,lun=\\.T:,size=450304671744

maxlatestart=1

reportinginterval=5

segmentlength=512m

rd=default,rampup=180,periods=90,measurement=300,runout=0,rampdown=0,buffers=1

rd=default,rdpct=0,xfersize=1024k

rd=TR1-166s_SPC-2-persist-w,streams=166

SPC-2 Persistence Test Run 2 (*read phase*)

* SPC-1 Persistence Read Phase using SPC-2

host=localhost,jvms=1,maxstreams=200

sd=sd1,host=localhost,lun=\\.R:,size=2026371022848

sd=sd2,host=localhost,lun=\\.S:,size=2026371022848

sd=sd3,host=localhost,lun=\\.T:,size=450304671744

maxlatestart=1

reportinginterval=5

segmentlength=512m

maxpersistenceerrors=10

rd=default,buffers=1,rdpct=100,xfersize=1024k

rd=TR1-166s_SPC-2-persist-r

APPENDIX E: SPC-1 WORKLOAD GENERATOR INPUT PARAMETERS

The first script, [phase1_cmd](#), was invoked to execute the required ASU pre-fill, the Primary Metrics Test (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*), Repeatability Test (*Repeatability Test Phase 1 and Repeatability Test Phase 2*), a reduced level SPC-1 Persistence Test Run 1 (*write phase*) and SPC-2 Persistence Test Run 2 (*write phase*) in an uninterrupted sequence.

A separate script, [startSlaves.cmd](#), was invoked prior to [phase1_cmd](#) to manually start the Slave JVMs. The [startSlaves.cmd](#) script invoked the appropriate script ([slave1.cmd...slave28.cmd](#)) to start each Slave JVM on each Host System.

The second script, [phase2_cmd](#), was invoked to execute SPC-2 Persistence Test Run 2 (*read phase*).

Both [phase1_cmd](#) and [phase2_cmd](#) also invoked additional commands to capture the detailed TSC profile listings required for a Remote Audit.

phase1_cmd

```
echo "ASU prefill started....."
cd \bench\vdbench\vdbench503
call vdbench -f \bench\vdbench\spc1\spc1_prefill.parm -o \bench\vdbench\spc1\PreFill
cd \bench\vdbench\spc1
echo "ASU prefill complete....."

echo "Capture a storage profile at the start of the run....."
cd "\Program Files (x86)\StorageManager\client"
smcli 10.113.169.61 10.113.169.62 -c "set storageArray time; show storageArray time;
show storageArray profile; show storageArray time;" -o
\bench\vdbench\spc1\config_at_start.txt -quick
cd \bench\vdbench\spc1

copy /Y spc1_iops.cfg spc1.cfg

java -Xmx768m -Xms768m metrics -b 4900 -s 600 -t 28800

java -Xmx768m -Xms768m repeat1 -b 4900 -s 600

java -Xmx768m -Xms768m repeat2 -b 4900 -s 600

copy /Y spc1_persist.cfg spc1.cfg

java -Xmx1024m -Xms1024m persist1 -b 490

echo "Move to SPC-2 to use SPC-2 Persistence..."

cd \bench\vdbench\spc2

java -Xmx1536m -Xms512m -Xss96k vdbench -w SPC2 -f
\bench\vdbench\spc1\spc2_persist1.cfg -o \bench\vdbench\spc1\init_spc2 -init

java -Xmx1536m -Xms512m -Xss96k vdbench -w SPC2 -f
\bench\vdbench\spc1\spc2_persist1.cfg -o \bench\vdbench\spc1\persistencel_spc2

cd \bench\vdbench\spc1
```

startSlaves.cmd

```
echo off
for /L %%G in (1,1,28) do (start slave%%G)
```

slave1.cmd

The script to start the first Slave JVM on the first Host System. A similar script was invoked each of the remaining Slave JVMs.

```
@echo off
echo *****
echo * Sleeping 15 seconds... *
echo *****
timeout /t 15

java -Xmx384m -Xms384m spc1 -fslave1.parm -oslave1

exit
```

phase2_cmd

```
cd \bench\vdbench\spc2

java -Xmx1536m -Xms512m -Xss96k vdbench -w SPC2 -f
\bench\vdbench\spc1\spc2_persist2.cfg -o \bench\vdbench\spc1\persistence2_spc2

cd \bench\vdbench\spc1


echo "Capture a storage profile at the end of the run....."
cd "\Program Files (x86)\StorageManager\client"
smcli 10.113.169.61 10.113.169.62 -c "show storageArray time; show storageArray
profile; show storageArray time;" -o \bench\vdbench\spc1\config_at_end.txt -quick
cd \bench\vdbench\spc1
```


APPENDIX F: THIRD-PARTY QUOTATION

QLogic QLE2672-CK HBA's

[View Online](#)

CDW CART FOR REVIEW


**PEOPLE
WHO
GET IT**



Account Message:
This email was sent to you from: **VALUED CUSTOMER**

Sender Comments:


CART DETAILS

ITEM	QTY	PART #	UNIT PRICE	EXT. PRICE
 <p>QLogic QLE2672-CK - host bus adapter Part#: QLE2672-CK UNSPSC: 43201404 Go to Site</p>	1	2868059	\$1,871.99	\$1,871.99
Sub Total:				\$1,871.99
GRAND TOTAL:				\$1,871.99


Fibre Channel Cables

[View Online](#)

CDW CART FOR REVIEW




PEOPLE WHO GET IT



Account Message:
This email was sent to you from: **VALUED CUSTOMER**

Sender Comments:
Cables

CART DETAILS

ITEM	QTY	PART #	UNIT PRICE	EXT. PRICE
 Tripp Lite 2M 10Gb Duplex Multimode 50/125 OM3 Fiber Cable LC/LC Aqua 6ft Part#: N820-02M UNSPSC: 26121604 Go to Site	1	1148024	\$22.99	\$22.99
Sub Total:				\$22.99
GRAND TOTAL:				\$22.99