



NEC

**SPC BENCHMARK 1™
FULL DISCLOSURE REPORT**

**NEC CORPORATION
NEC STORAGE M710F**

SPC-1 V1.14

**Submitted for Review: March 11, 2016
Submission Identifier: A00170**

First Edition – March 2016

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by NEC Corporation for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. NEC Corporation may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local NEC Corporation representative for information on products and services available in your area.

© Copyright NEC Corporation 2016. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

SPC Benchmark-1, SPC-1, SPC-1 IOPS, SPC-1 LRT and SPC-1 Price-Performance are trademarks of the Storage Performance Council. NEC and the NEC logo are trademarks or registered trademarks of NEC Corporation in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

Table of Contents

Audit Certification	vii
Audit Certification (<i>cont.</i>)	viii
Letter of Good Faith	ix
Executive Summary	10
Test Sponsor and Contact Information	10
Revision Information and Key Dates	10
Tested Storage Product (TSP) Description	11
Summary of Results	12
Storage Capacities, Relationships, and Utilization	13
Response Time – Throughput Curve	16
Response Time – Throughput Data	16
Priced Storage Configuration Pricing	17
Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration	18
Priced Storage Configuration Diagram	19
Priced Storage Configuration Components	20
Configuration Information	21
Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram	21
Storage Network Configuration	21
Host System(s) and Tested Storage Configuration (TSC) Table of Components	21
Benchmark Configuration/Tested Storage Configuration Diagram	22
Host System and Tested Storage Configuration Components	23
Customer Tunable Parameters and Options	24
Tested Storage Configuration (TSC) Description	24
SPC-1 Workload Generator Storage Configuration	24
ASU Pre-Fill	25
SPC-1 Data Repository	26
Storage Capacities and Relationships	26
SPC-1 Storage Capacities	26
SPC-1 Storage Hierarchy Ratios	27
SPC-1 Storage Capacity Charts	27
Storage Capacity Utilization	29
Logical Volume Capacity and ASU Mapping	30
SPC-1 Benchmark Execution Results	31
SPC-1 Tests, Test Phases, and Test Runs	31

“Ramp-Up” Test Runs.....	32
Primary Metrics Test – Sustainability Test Phase	32
SPC-1 Workload Generator Input Parameters	33
Sustainability Test Results File	33
Sustainability – Data Rate Distribution Data (MB/second)	33
Sustainability – Data Rate Distribution Graph	33
Sustainability – I/O Request Throughput Distribution Data	34
Sustainability – I/O Request Throughput Distribution Graph	34
Sustainability – Average Response Time (ms) Distribution Data	35
Sustainability – Average Response Time (ms) Distribution Graph	35
Sustainability – Response Time Frequency Distribution Data	36
Sustainability – Response Time Frequency Distribution Graph	36
Sustainability – Measured Intensity Multiplier and Coefficient of Variation.....	37
Primary Metrics Test – IOPS Test Phase.....	38
SPC-1 Workload Generator Input Parameters	38
IOPS Test Results File.....	38
IOPS Test Run – I/O Request Throughput Distribution Data	39
IOPS Test Run – I/O Request Throughput Distribution Graph.....	39
IOPS Test Run – Average Response Time (ms) Distribution Data	40
IOPS Test Run – Average Response Time (ms) Distribution Graph	40
IOPS Test Run –Response Time Frequency Distribution Data	41
IOPS Test Run –Response Time Frequency Distribution Graph.....	41
IOPS Test Run – I/O Request Information.....	42
IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation	42
Primary Metrics Test – Response Time Ramp Test Phase	43
SPC-1 Workload Generator Input Parameters	43
Response Time Ramp Test Results File.....	43
Response Time Ramp Distribution (IOPS) Data.....	44
Response Time Ramp Distribution (IOPS) Data (<i>continued</i>)	45
Response Time Ramp Distribution (IOPS) Graph	45
SPC-1 LRT™ Average Response Time (ms) Distribution Data.....	46
SPC-1 LRT™ Average Response Time (ms) Distribution Graph	46
SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation	47
Repeatability Test	48
SPC-1 Workload Generator Input Parameters	48
Repeatability Test Results File	49
Repeatability 1 LRT – I/O Request Throughput Distribution Data.....	50
Repeatability 1 LRT – I/O Request Throughput Distribution Graph	50
Repeatability 1 LRT –Average Response Time (ms) Distribution Data	51

Repeatability 1 LRT –Average Response Time (ms) Distribution Graph.....	51
Repeatability 1 IOPS – I/O Request Throughput Distribution Data	52
Repeatability 1 IOPS – I/O Request Throughput Distribution Graph.....	52
Repeatability 1 IOPS –Average Response Time (ms) Distribution Data.....	53
Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph	53
Repeatability 2 LRT – I/O Request Throughput Distribution Data.....	54
Repeatability 2 LRT – I/O Request Throughput Distribution Graph	54
Repeatability 2 LRT –Average Response Time (ms) Distribution Data	55
Repeatability 2 LRT –Average Response Time (ms) Distribution Graph.....	55
Repeatability 2 IOPS – I/O Request Throughput Distribution Data	56
Repeatability 2 IOPS – I/O Request Throughput Distribution Graph.....	56
Repeatability 2 IOPS –Average Response Time (ms) Distribution Data.....	57
Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph	57
Repeatability 1 (LRT) Measured Intensity Multiplier and Coefficient of Variation.....	58
Repeatability 1 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	58
Repeatability 2 (LRT) Measured Intensity Multiplier and Coefficient of Variation.....	58
Repeatability 2 (IOPS) Measured Intensity Multiplier and Coefficient of Variation	59
Data Persistence Test.....	60
SPC-1 Workload Generator Input Parameters	60
Data Persistence Test Results File	60
Data Persistence Test Results.....	61
Priced Storage Configuration Availability Date.....	62
Pricing Information.....	62
Tested Storage Configuration (TSC) and Priced Storage Configuration Differences.....	62
Anomalies or Irregularities	62
Appendix A: SPC-1 Glossary	63
“Decimal” (<i>powers of ten</i>) Measurement Units.....	63
“Binary” (<i>powers of two</i>) Measurement Units.....	63
SPC-1 Data Repository Definitions.....	63
SPC-1 Data Protection Levels	64
SPC-1 Test Execution Definitions	64
I/O Completion Types	66
SPC-1 Test Run Components.....	66
Appendix B: Customer Tunable Parameters and Options.....	67
Appendix C: Tested Storage Configuration (TSC) Creation	68
Telnet Login and Enter Maintenance Mode	68

Create Volume Group (Pools)	68
Create Logical Disks	69
Exit Maintenance Mode and Telnet Logoff	69
SPC-1 Logical Volume Creation	70
Appendix D: SPC-1 Workload Generator Storage Commands and Parameters	71
ASU Pre-Fill	71
Primary Metrics and Repeatability Tests	71
SPC-1 Persistence Test	72
Slave JVMs	72
Appendix E: SPC-1 Workload Generator Input Parameters	73
Slave JVMs	73
start_slave_10.bat	73
ns59_sl.parm.....	74
master_script_M710f.bat	74
ASU Pre-Fill	75
prepssd.bat	75
TSC Power Off	75
shutdown.bat	75
M710F_shutdown.ttl.....	75
SPC-1 Persistence Test Run 2 (read phase)	76
master_script_2_M710f.bat	76

AUDIT CERTIFICATION



Kentaro Yamamoto
 NEC Corporation
 1-10, Nisshin-Cho, Fuchu
 Tokyo, 183-8501, Japan

March 10, 2016

The SPC Benchmark 1™ Reported Data listed below for the NEC Storage M710F was produced in compliance with the SPC Benchmark 1™ v1.14 Remote Audit requirements.

SPC Benchmark 1™ v1.14 Reported Data	
Tested Storage Product (TSP) Name: NEC Storage M710F	
Metric	Reported Result
SPC-1 IOPS™	605,016.49
SPC-1 Price-Performance	\$0.81/SPC-1 IOPS™
Total ASU Capacity	17,175.474 GB
Data Protection Level	Protected 2 (<i>Mirroring</i>)
Total Price (including three-year maintenance)	\$492,726.70
Currency Used	U.S. Dollars
Target Country for availability, sales and support	USA

The following SPC Benchmark 1™ Remote Audit requirements were reviewed and found compliant with 1.14 of the SPC Benchmark 1™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified by information supplied by NEC Corporation:
 - ✓ Physical Storage Capacity and requirements.
 - ✓ Configured Storage Capacity and requirements.
 - ✓ Addressable Storage Capacity and requirements.
 - ✓ Capacity of each Logical Volume and requirements.
 - ✓ Capacity of each Application Storage Unit (ASU) and requirements.
- The total Application Storage Unit (ASU) Capacity was filled with random data, using an auditor approved tool, prior to execution of the SPC-1 Tests.

Storage Performance Council
 643 Bair Island Road, Suite 103
 Redwood City, CA 94062
AuditService@storageperformance.org
 650.556.9384

AUDIT CERTIFICATION (CONT.)

NEC Storage M710F
SPC-1 Audit Certification


Page 2

- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).
- Listings and commands to configure the Benchmark Configuration/Tested Storage Configuration, including customer tunable parameters that were changed from default values.
- SPC-1 Workload Generator commands and parameters used for the audited SPC Test Runs.
- The following Host System requirements were verified by information supplied by NEC Corporation:
 - ✓ The type of Host Systems including the number of processors and main memory.
 - ✓ The presence and version number of the SPC-1 Workload Generator on each Host System.
 - ✓ The TSC boundary within each Host System.
- The execution of each Test, Test Phase, and Test Run was found compliant with all of the requirements and constraints of Clauses 4, 5, and 11 of the SPC-1 Benchmark Specification.
- The Test Results Files and resultant Summary Results Files received from NEC Corporation for each of following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1 Benchmark Specification:
 - ✓ Data Persistence Test
 - ✓ Sustainability Test Phase
 - ✓ IOPS Test Phase
 - ✓ Response Time Ramp Test Phase
 - ✓ Repeatability Test
- There were no differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration.
- The submitted pricing information met all of the requirements and constraints of Clause 8 of the SPC-1 Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 9 of the SPC-1 Benchmark Specification.
- This successfully audited SPC measurement is not subject to an SPC Confidential Review.

Audit Notes:

There were no audit notes or exceptions.

Respectfully,



Walter E. Baker
SPC Auditor

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@storageperformance.org
650.556.9384

LETTER OF GOOD FAITH

NEC Corporation
1-10, Nisshin-Cho, Fuchu, Tokyo 183-8501, Japan

Date: March 9, 2016

From: NEC Corporation

To: Walter E. Baker, SPC Auditor
Storage Performance Council (SPC)
643 Bair Island Road, Suite 103
Redwood City, CA 94063-2755

Subject: SPC-1 Letter of Good Faith for the NEC Storage M710F

NEC Corporation is the SPC-1 Test Sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1 benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with V1.14 of the SPC-1 benchmark specification.

In addition, we have reported any items in the Benchmark Configuration and execution of the benchmark that affected the reported results even if the items are not explicitly required to be disclosed by the SPC-1 benchmark specification.

Signed:

Tsuneo Kurachi

Tsuneo Kurachi
Chief Manager
7th IT Platform Department
IT Platform Division

Date:

9th, March, 2016

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	NEC Corporation – http://www.nec.com Kentaro Yamamoto – k-yamamoto@dh.jp.nec.com 1-10, Nisshin-Cho, Fuchu Tokyo, 183-8501, Japan Phone: +81 42 333 5150
Test Sponsor Alternate Contact	NEC Corporation – http://www.nec.com Yoshifumi Yamaguchi – y-yamaguchi@dc.jp.nec.com 1-10, Nisshin-Cho, Fuchu Tokyo, 183-8501, Japan Phone: +81 42 333 1710 FAX: +81 42 333 1777
Test Sponsor Alternate Contact	NEC Corporation of America – http://www.necam.com/ Chauncey Schwartz – chauncey.schwartz@necam.com 2880 Scott Blvd. Santa Clara, CA 95050 Phone: (952) 388-8466
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-1 Specification revision number	V1.14
SPC-1 Workload Generator revision number	V2.3.0
Date Results were first used publicly	March 11, 2016
Date the FDR was submitted to the SPC	March 11, 2016
Date the Priced Storage Configuration is available for shipment to customers	currently available
Date the TSC completed audit certification	March 10, 2016

Tested Storage Product (TSP) Description

The NEC M710F SAN disk array has the high performance, capacity and availability demanded by data-intensive, mission critical environments. Easy to operate, the M710F is well-suited for virtualized settings due to its scalability, 192GB of cache, 16Gbps or 8Gbps of fibre channel, and VMware APIs support.

Best tuning to maximize the performance of SSD realizes fast and stable response. And large amount of cache memory assures high I/O performance to access the data frequently used.

Large-scale storage integration is achieved by utilizing advanced virtualization technologies, such as VMware certified, data allocation optimization with a high-speed SSD and thin provisioning.

Summary of Results

SPC-1 Reported Data	
Tested Storage Product (TSP) Name: NEC Storage M710F	
Metric	Reported Result
SPC-1 IOPS™	605,016.49
SPC-1 Price-Performance™	\$0.81/SPC-1 IOPS™
Total ASU Capacity	17,175.474 GB
Data Protection Level	Protected 2 (<i>Mirroring</i>)
Total Price	\$492,726.70
Currency Used	U.S. Dollars
Target Country for availability, sales and support	USA

SPC-1 IOPS™ represents the maximum I/O Request Throughput at the 100% load point.

SPC-1 Price-Performance™ is the ratio of **Total Price** to SPC-1 IOPS™.

Total ASU (Application Storage Unit) Capacity represents the total storage capacity available to be read and written in the course of executing the SPC-1 benchmark.

A **Data Protection Level** of **Protected 2** using *Mirroring* configures two or more identical copies of user data.

***Protected 2:** The single point of failure of any **component** in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.*


Total Price includes the cost of the Priced Storage Configuration plus three years of hardware maintenance and software support as detailed on page 17.



Currency Used is formal name for the currency used in calculating the **Total Price** and **SPC-1 Price-Performance™**. That currency may be the local currency of the **Target Country** or the currency of a difference country (*non-local currency*).


The **Target Country** is the country in which the Priced Storage Configuration is available for sale and in which the required hardware maintenance and software support is provided either directly from the Test Sponsor or indirectly via a third-party supplier.

Storage Capacities, Relationships, and Utilization

The following four charts and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

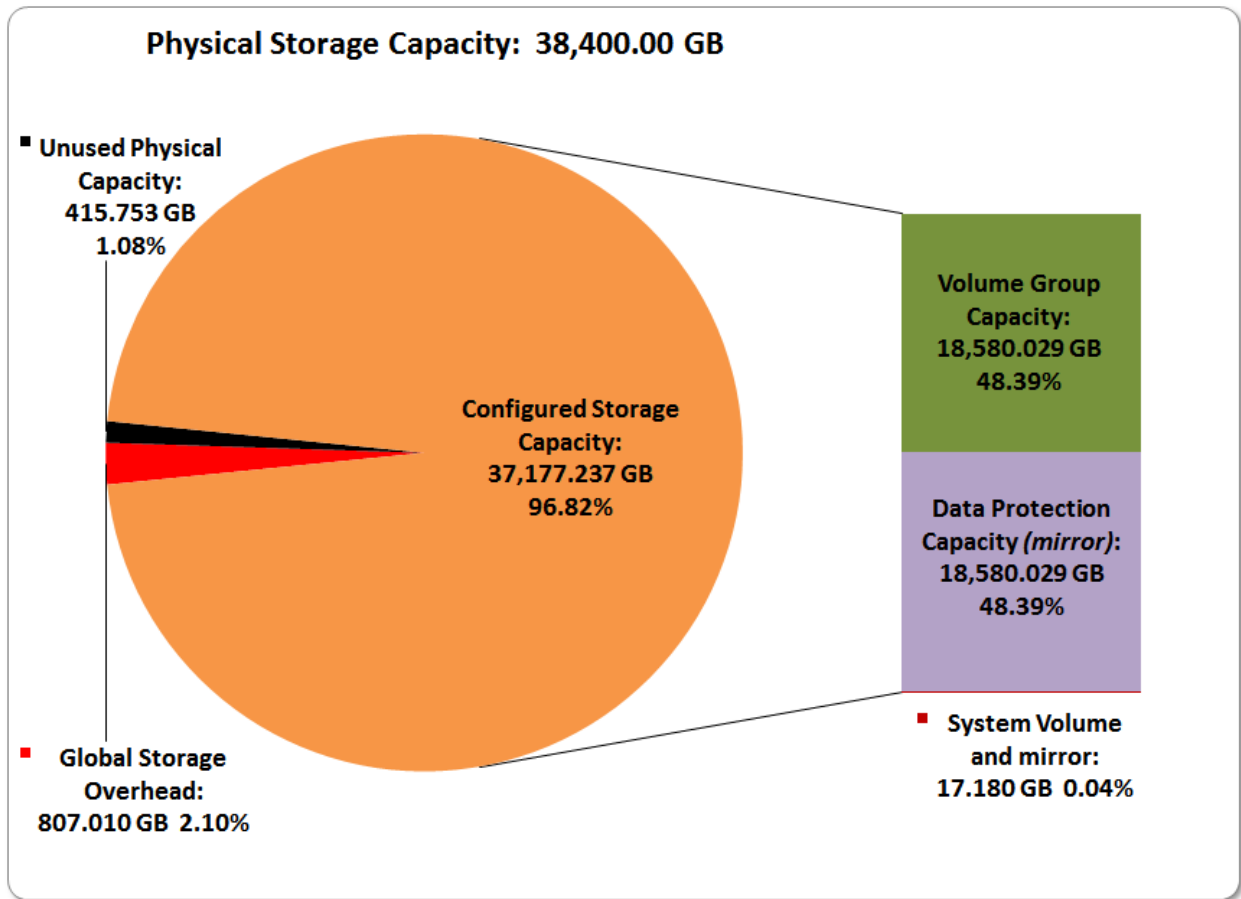

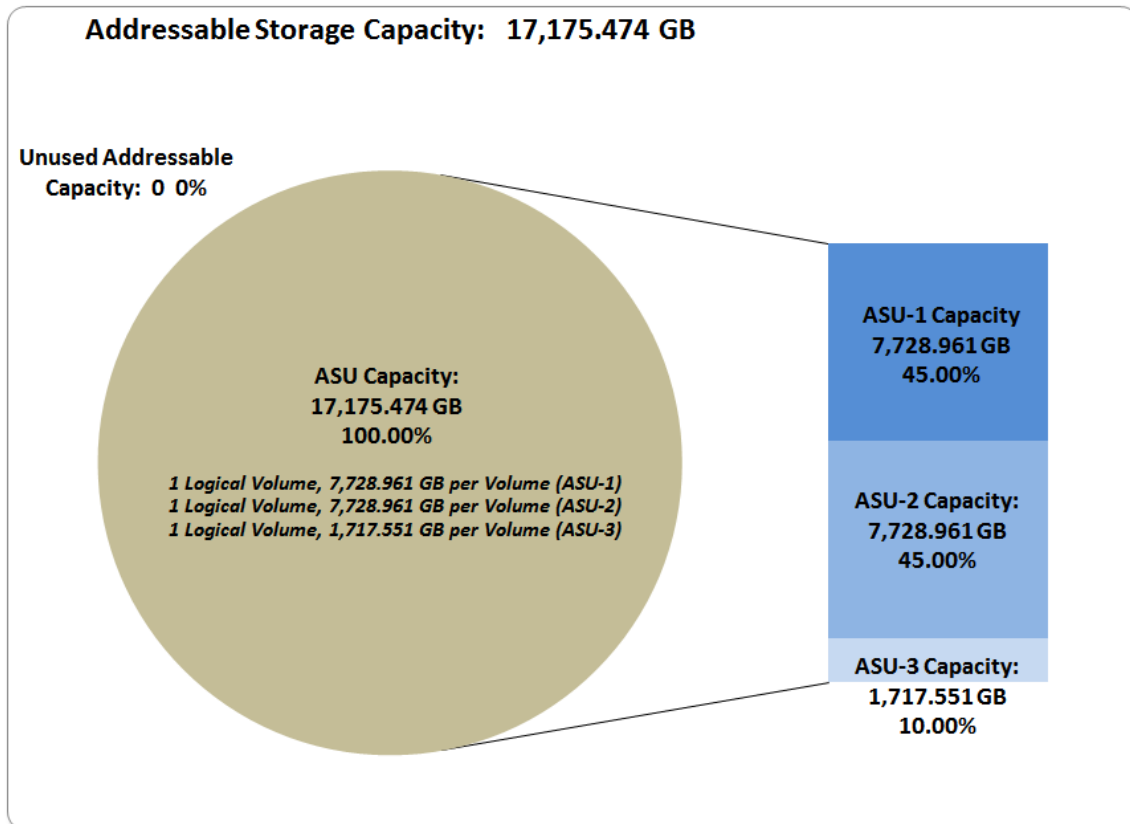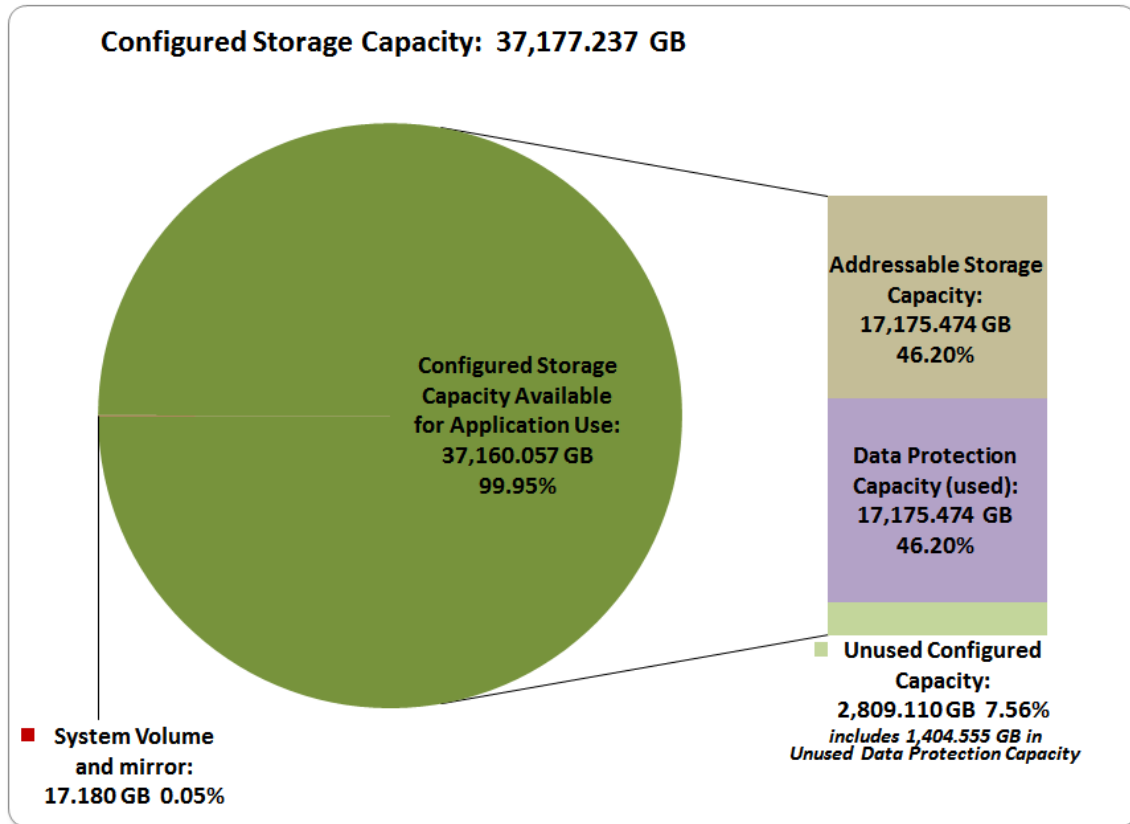

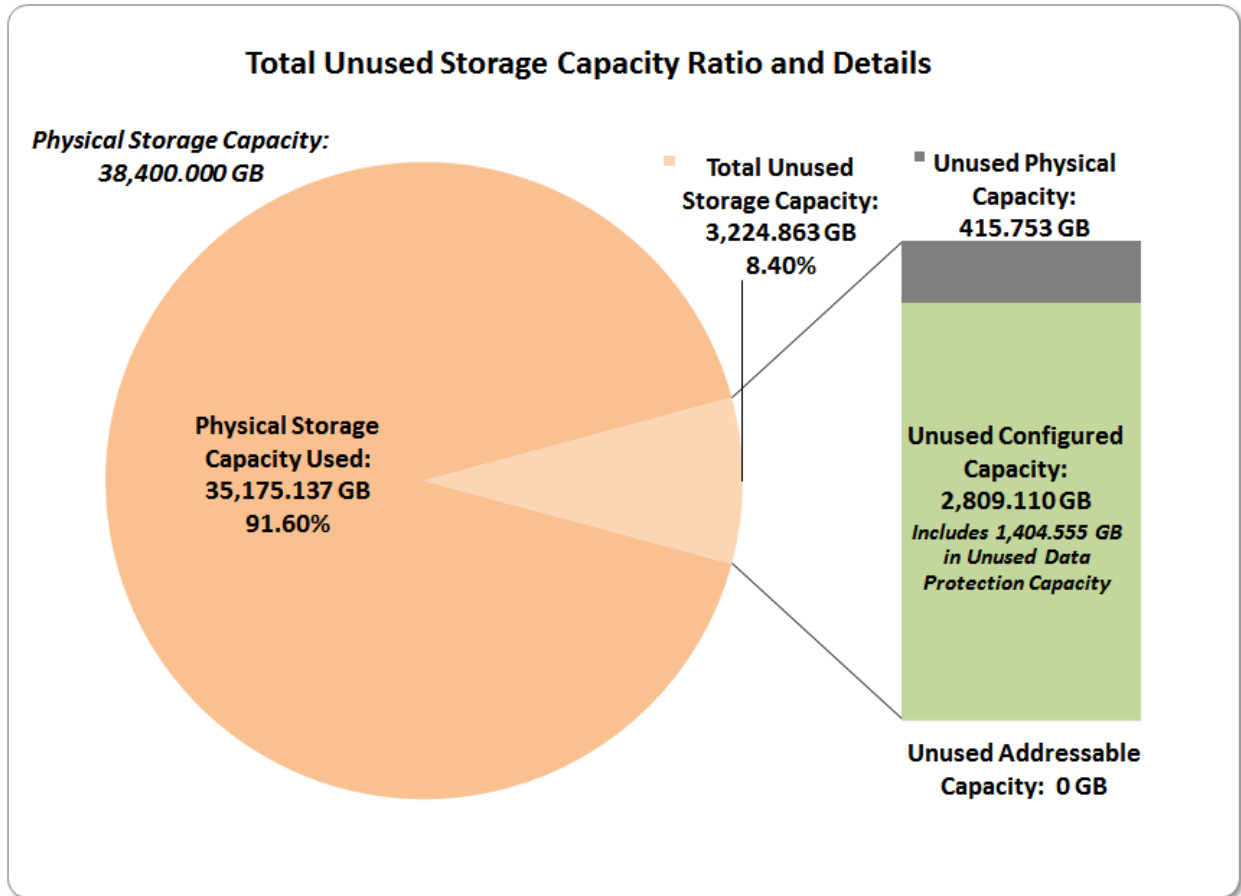

SPC-1 Storage Capacity Utilization	
Application Utilization	44.73%
Protected Application Utilization	89.46%
Unused Storage Ratio	8.40%

Application Utilization: Total ASU Capacity (17,175.474 GB) divided by Physical Storage Capacity (38,400.000 GB).

Protected Application Utilization: (Total ASU Capacity (17,175.474 GB) plus total Data Protection Capacity (18,580.029 GB) minus unused Data Protection Capacity (1,404.555 GB)) divided by Physical Storage Capacity (38,400.000 GB).


Unused Storage Ratio: Total Unused Capacity (3,224,863 GB) divided by Physical Storage Capacity (38,400.000 GB) and may not exceed 45%.

Detailed information for the various storage capacities and utilizations is available on pages 26-27.

Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

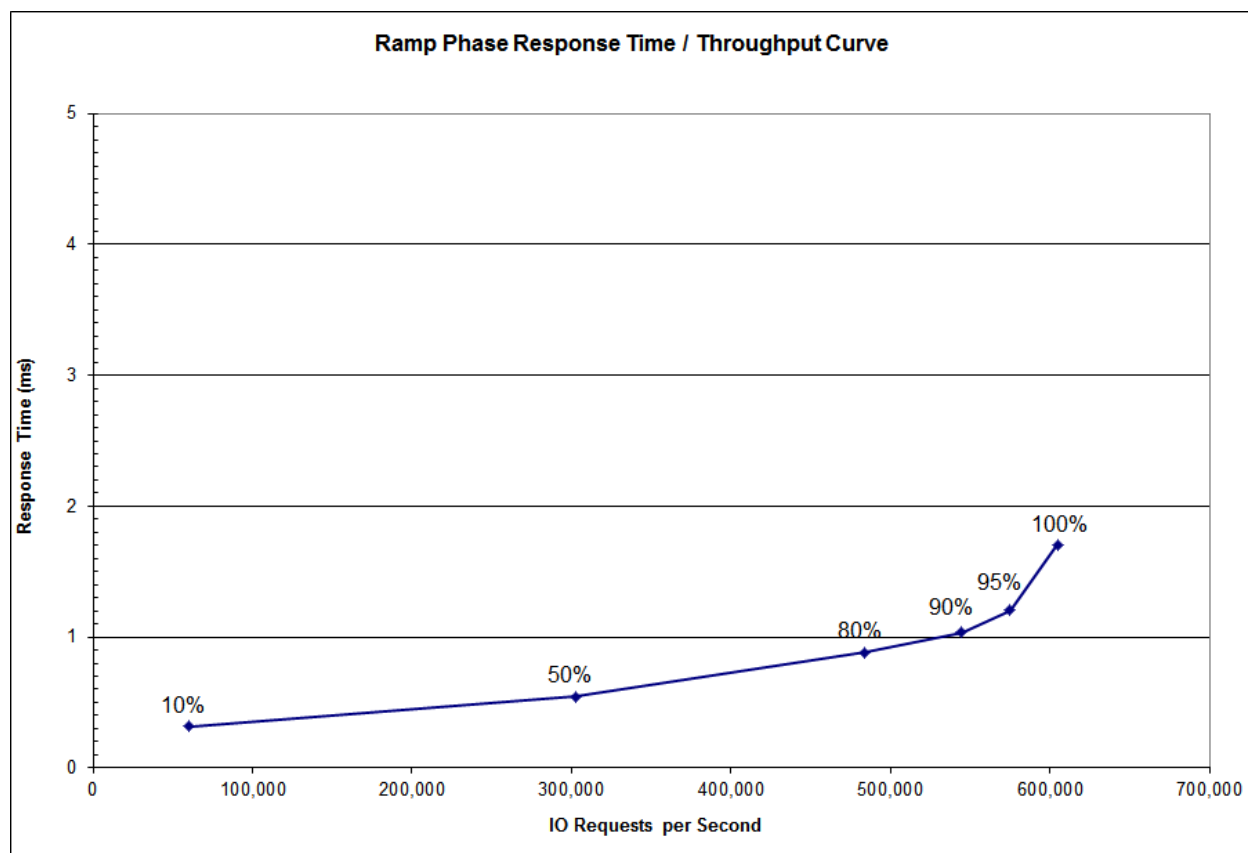

Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
I/O Request Throughput	60,496.10	302,501.55	483,971.18	544,458.66	574,758.81	605,016.49
Average Response Time (ms):						
All ASUs	0.32	0.54	0.88	1.04	1.21	1.71
ASU-1	0.31	0.53	0.84	0.98	1.14	1.60
ASU-2	0.34	0.56	0.89	1.04	1.21	1.70
ASU-3	0.32	0.57	0.96	1.15	1.35	1.93
Reads	0.35	0.55	0.82	0.93	1.06	1.47
Writes	0.30	0.54	0.92	1.10	1.30	1.86

Priced Storage Configuration Pricing

SKU	Description	Quantity	Unit List Price	Extended List	Discount	Extended Discount
Hardware						
NF5322-SFP16E	2 - 16Gb FC SFPs	12	\$ 367.00	\$ 4,404.00	20%	\$ 3,523.20
Q24-HL000000118980	M710F Dual Controller Disk Array Unit w Base SW (w - 192GB Cache Memory, 2 - 4 port Disk Port Cards w/o Host Port Card, SFP)	1	\$ 100,913.00	\$ 100,913.00	20%	\$ 80,730.40
Q24-HL000000072891	Localization Kit for M510/M710 Disk Array Unit	1	\$ -	\$ -	20%	\$ -
NF5372-SF06WE	M710 2 - 4 port FC Host Port Cards (4 ports per Controller) w/o SFP	6	\$ 3,491.00	\$ 20,946.00	20%	\$ 16,756.80
NF5372-SD01WE	M710 2 - 4 port Disk Port Cards (4 ports per Controller)	1	\$ 2,961.00	\$ 2,961.00	20%	\$ 2,368.80
NF5322-SSA96E	SAS SSD (2.5" 400GB)	96	\$ 2,739.00	\$ 262,944.00	20%	\$ 210,355.20
			\$ -	\$ -	20%	\$ -
NF5322-SE81E	Disk Enclosure 2.5 inch for Mx10	8	\$ 5,427.00	\$ 43,416.00	20%	\$ 34,732.80
Q24-HL000000072706	Localization Kit for Mx10 Disk Enclosure	8	\$ -	\$ -	20%	\$ -
N8190-158	NEC N8190-158 dual-port 16G FC HBAs (w/ SFP)	12	\$ 1,570.00	\$ 18,840.00	20%	\$ 15,072.00
Software						
Q24-HL000000074244	M710 60 Day Trial License Bundle	1	\$ -	\$ -	20%	\$ -
Q24-HL000000072867	M710 Base Software	1	\$ -	\$ -	20%	\$ -
Maintenance						
Q24-DN000000072502	3 Years Upgrade to Platinum M710F Dual Controller w/Base SW	1	\$ 16,571.00	\$ 16,571.00	15%	\$ 14,085.35
Q24-DN000000072693	3 Years Upgrade to Platinum M710 2 - 4 port FC Host Port Cards (4 ports per Controller)	6	\$ 1,222.00	\$ 7,332.00	15%	\$ 6,232.20
Q24-DN000000072700	3 Years Upgrade to Platinum M710 2 - 4 port Disk Port Cards (4 ports per Controller)	1	\$ 1,037.00	\$ 1,037.00	15%	\$ 881.45
Q24-DN000000072609	3 Years Upgrade to Platinum Disk Enclosure 2.5 inch for Mx10	8	\$ 1,900.00	\$ 15,200.00	15%	\$ 12,920.00
Q24-DN000000072939	1 Year Platinum SW Maintenance M710 Base Software	3	\$ 5,620.00	\$ 16,860.00	15%	\$ 14,331.00
Q24-DN000000073181	3 Years Upgrade to Platinum SAS SSD (2.5" 400GB)	96	\$ 959.00	\$ 92,064.00	15%	\$ 78,254.40
Cables and Racks						
Power Strips	Power Strips (8 outlets)	4	\$ 78.00	\$ 312.00	10%	\$ 280.80
RACK	Rack 42U	1	\$ 1,799.00	\$ 1,799.00	10%	\$ 1,619.10
FC CABLE	CRU FC CABLE 5M x2 (M#LCLC-5MQ) 5M	12	\$ 54.00	\$ 648.00	10%	\$ 583.20
	Configuration Total			\$ 606,247.00		\$ 492,726.70

- *Power codes for M710F and Disk Enclosures are included in Localization Kits (Q24-HL000000072891 and Q24-HL000000072706).*
- *Price of M710F Disk Array Unit includes price of M710F Base Software (Q24-HL000000072867).*
- *PathManager for Windows/Linux/VMware is included in M710F Base Software (Q24-HL000000072867).*


The above pricing includes hardware maintenance and software support for three years, 7 days per week, 24 hours per day. The hardware maintenance and software support provides the following:

- Acknowledgement of new and existing problems within four (4) hours.
- Onsite presence of a qualified maintenance engineer or provision of a customer replaceable part within four (4) hours of the above acknowledgement for any hardware failure that results in an inoperative Price Storage Configuration that can be remedied by the repair or replacement of a Priced Storage Configuration component.

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the Tested Storage Configuration and the Priced Storage Configuration.

Priced Storage Configuration Diagram

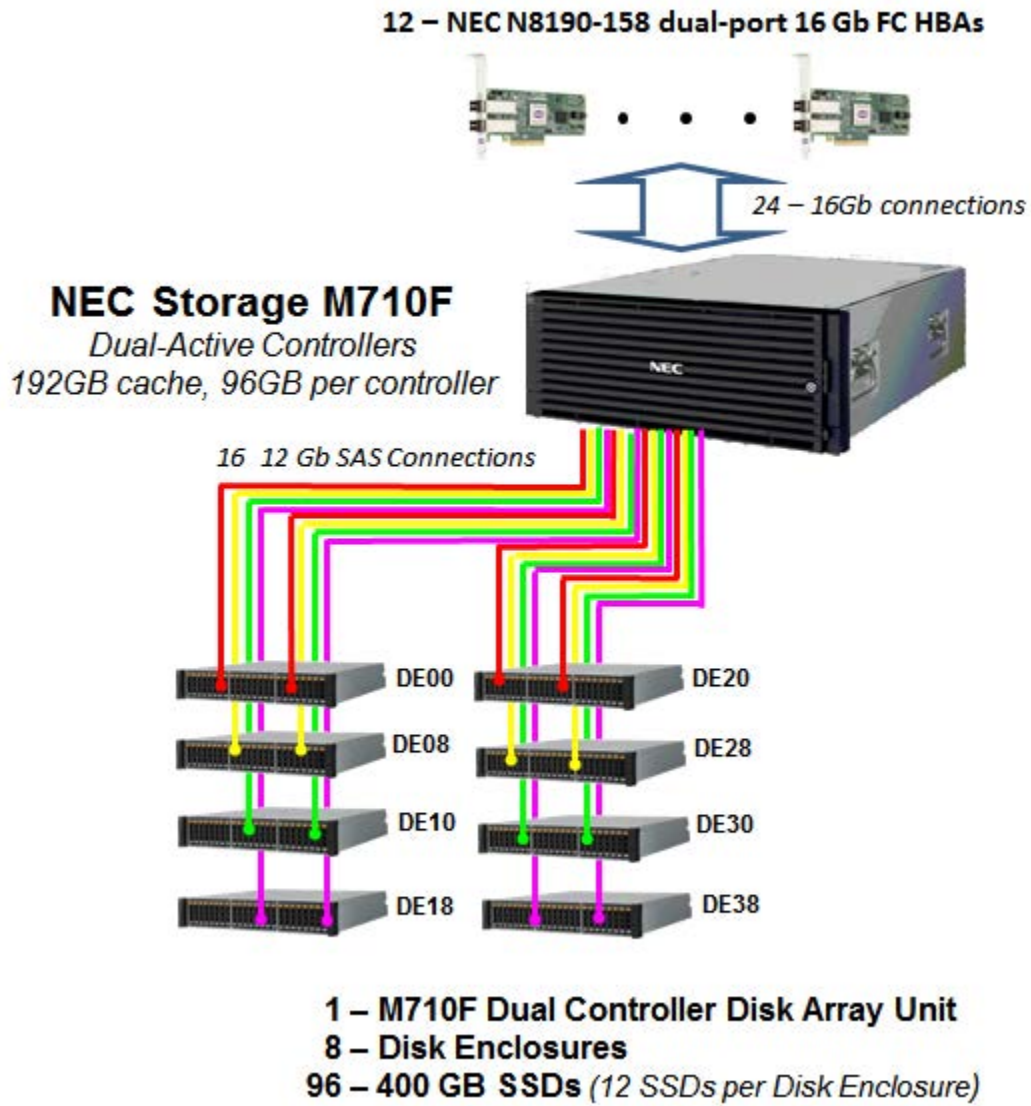

Priced Storage Configuration Components

Priced Storage Configuration
12 – NEC N8190-158 dual-port 16Gb FC HBAs
NEC Storage M710F Dual-Active Controllers, each with 96 GB memory (<i>192 GB total</i>) 1 – 4-port Disk Port Card (<i>2 cards total, 8 ports total and used</i>)
12 – 4-port FC Host Port Cards <i>(6 cards and 24 ports per controller, 48 ports total, 24 ports used)</i>
2 – 4-port Disk Port Cards <i>(1 card and 4 ports per controller; 8 ports total and used)</i>
8 – Disk Enclosures, 2.5"
96 – 400 GB SAS SSDs (<i>12 SSDs per Disk Enclosure</i>)
1 – 42U Rack with 4 power strips (<i>8 outlets per strip</i>)

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-1 benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

CONFIGURATION INFORMATION

Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram

Clause 9.4.3.4.1

A one page Benchmark Configuration (BC)/Tested Storage Configuration (TSC) diagram shall be included in the FDR...

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page [22 \(Benchmark Configuration/Tested Storage Configuration Diagram\)](#).

Storage Network Configuration

Clause 9.4.3.4.1

...

- 5. If the TSC contains network storage, the diagram will include the network configuration. If a single diagram is not sufficient to illustrate both the Benchmark Configuration and network configuration in sufficient detail, the Benchmark Configuration diagram will include a high-level network illustration as shown in Figure 9-8. In that case, a separate, detailed network configuration diagram will also be included as described in Clause 9.4.3.4.2.*

Clause 9.4.3.4.2

If a storage network was configured as a part of the Tested Storage Configuration and the Benchmark Configuration diagram described in Clause 9.4.3.4.1 contains a high-level illustration of the network configuration, the Executive Summary will contain a one page topology diagram of the storage network as illustrated in Figure 9-9.

The Tested Storage Configuration (TSC) was configured with direct-attached storage.


Host System(s) and Tested Storage Configuration (TSC) Table of Components

Clause 9.4.3.4.3

The FDR will contain a table that lists the major components of each Host System and the Tested Storage Configuration (TSC).

The Host System(s) and TSC table of components may be found on page [23 \(Host System and Tested Storage Configuration Components\)](#).

Benchmark Configuration/Tested Storage Configuration Diagram

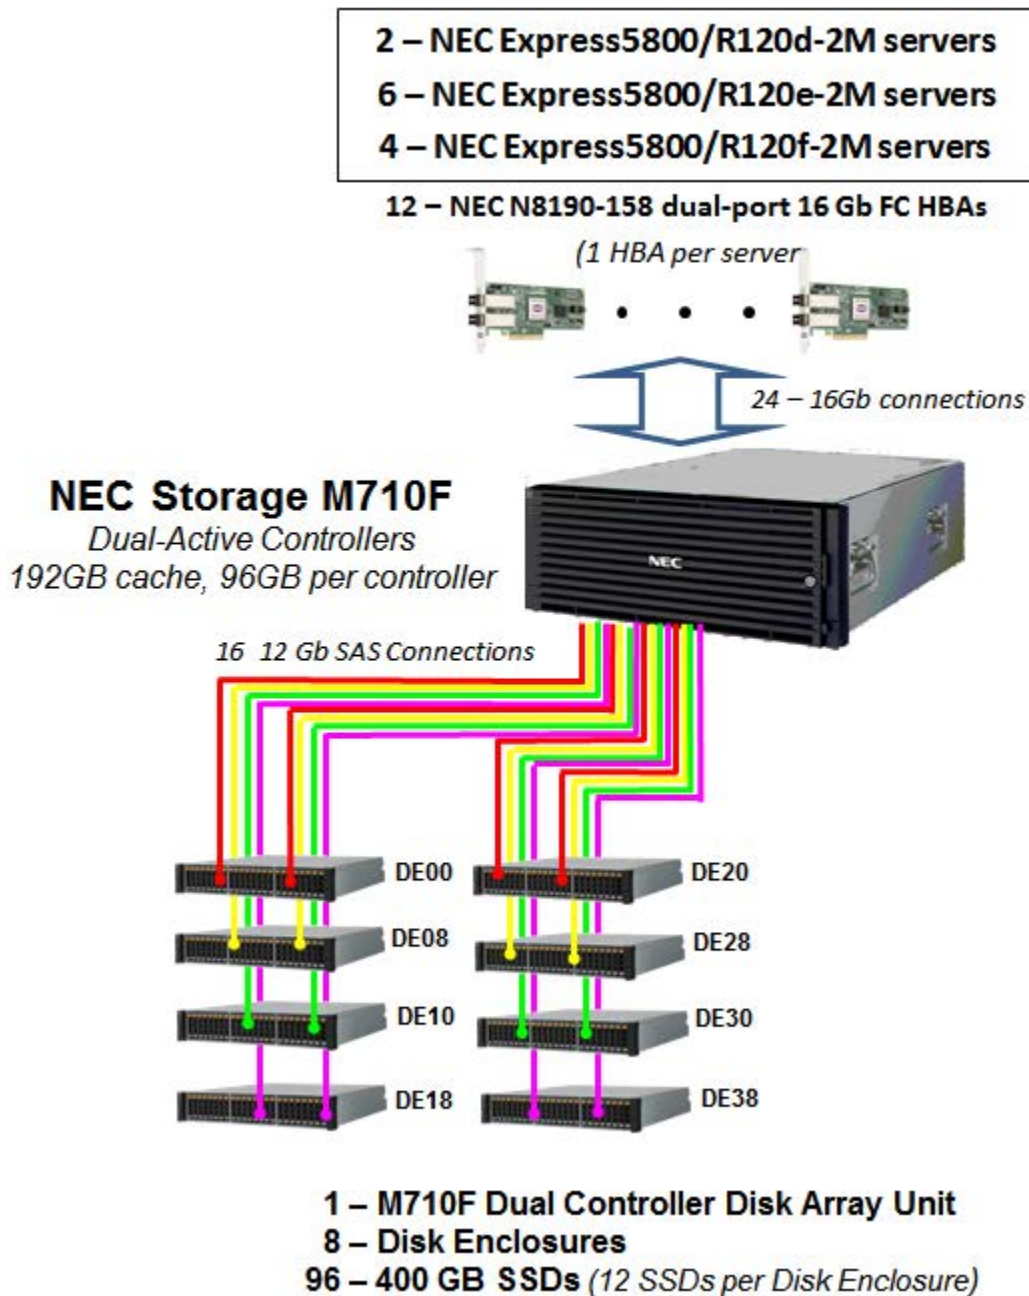

Host System and Tested Storage Configuration Components

Host Systems
<p>2 – NEC Express5800/R120d-2M servers, each with:</p> <ul style="list-style-type: none"> 2 – Intel® Xeon® 2.5 GHz E5-2640 v2 processors 6 cores per processor and 15 MB Intel® Smart Cache 16 GB main memory Windows Server 2008 R2 Standard with SP1 PCIe
<p>6 – NEC Express5800/R120e-2M servers, each with:</p> <ul style="list-style-type: none"> 2 – Intel® Xeon® 2.6 GHz E5-2630 v2 processors 6 cores per processor and 15 MB Intel® Smart Cache 16 GB main memory Windows Server 2008 R2 Standard with SP1 PCIe
<p>4 – NEC Express5800/R120f-2M servers, each with:</p> <ul style="list-style-type: none"> 2 – Intel® Xeon® 2.6 GHz E5-2660 v3 processors 10 cores per processor and 25 MB Intel® Smart Cache 32 GB main memory Windows Server 2008 R2 Standard with SP1 PCIe
Priced Storage Configuration
12 – NEC N8190-158 dual-port 16Gb FC HBAs (<i>1 HBA per server</i>)
<p>NEC Storage M710F</p> <ul style="list-style-type: none"> Dual-Active Controllers, each with <ul style="list-style-type: none"> 96 GB memory (<i>192 GB total</i>) 1 – 4-port Disk Port Card (<i>2 cards total, 8 ports total and used</i>)
12 – 4-port FC Host Port Cards (<i>6 cards and 24 ports per controller, 48 ports total, 24 ports used</i>)
2 – 4-port Disk Port Cards (<i>1 card and 4 ports per controller; 8 ports total and used</i>)
8 – Disk Enclosures, 2.5"
96 – 400 GB SAS SSDs (<i>12 SSDs per Disk Enclosure</i>)
1 – 42U Rack with 4 power strips (<i>8 outlets per strip</i>)

Customer Tunable Parameters and Options

Clause 9.4.3.5.1

All Benchmark Configuration (BC) components with customer tunable parameter and options that have been altered from their default values must be listed in the FDR. The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option. If the parameter name is not self-explanatory to a knowledgeable practitioner, a brief description of the parameter's use must also be included in the FDR entry.

[Appendix B: Customer Tunable Parameters and Options](#) on page 67 contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

Tested Storage Configuration (TSC) Description

Clause 9.4.3.5.2

The FDR must include sufficient information to recreate the logical representation of the TSC. In addition to customer tunable parameters and options (Clause 4.2.4.5.3), that information must include, at a minimum:

- A diagram and/or description of the following:
 - All physical components that comprise the TSC. Those components are also illustrated in the BC Configuration Diagram in Clause 9.2.4.4.1 and/or the Storage Network Configuration Diagram in Clause 9.2.4.4.2.
 - The logical representation of the TSC, configured from the above components that will be presented to the Workload Generator.
- Listings of scripts used to create the logical representation of the TSC.
- If scripts were not used, a description of the process used with sufficient detail to recreate the logical representation of the TSC.

[Appendix C: Tested Storage Configuration \(TSC\) Creation](#) on page 68 contains the detailed information that describes how to create and configure the logical TSC.

SPC-1 Workload Generator Storage Configuration

Clause 9.4.3.5.3

The FDR must include all SPC-1 Workload Generator storage configuration commands and parameters.

The SPC-1 Workload Generator storage configuration commands and parameters for this measurement appear in [Appendix D: SPC-1 Workload Generator Storage Commands and Parameters](#) on page 71.

ASU Pre-Fill

Clause 5.3.3

Each of the three SPC-1 ASUs (ASU-1, ASU-2 and ASU-3) is required to be completely filled with specified content prior to the execution of audited SPC-1 Tests. The content is required to consist of random data pattern such as that produced by an SPC recommended tool.

The configuration file used to complete the required ASU pre-fill appears in [Appendix D: SPC-1 Workload Generator Storage Commands and Parameters](#) on page [71](#).

SPC-1 DATA REPOSITORY

This portion of the Full Disclosure Report presents the detailed information that fully documents the various SPC-1 storage capacities and mappings used in the Tested Storage Configuration. [SPC-1 Data Repository Definitions](#) on page [63](#) contains definitions of terms specific to the SPC-1 Data Repository.

Storage Capacities and Relationships

Clause 9.4.3.6.1

Two tables and four charts documenting the storage capacities and relationships of the SPC-1 Storage Hierarchy (Clause 2.1) shall be included in the FDR. ... The capacity value in each chart may be listed as an integer value, for readability, rather than the decimal value listed in the table below.

SPC-1 Storage Capacities

The Physical Storage Capacity consisted of 38,400.000 GB distributed over 96 solid state devices (SSDs) each with a formatted capacity of 400.000 GB. There was 415.753 GB (1.08%) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 807.010 GB (2.10%) of the Physical Storage Capacity. There was 2,809.110 GB (7.56%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 100% of the Addressable Storage Capacity resulting in 0.00 GB (0.00%) of Unused Storage within the Addressable Storage Capacity. The Data Protection (*Mirroring*) capacity was 18,580.029 GB of which 17,175.474 GB was utilized. The total Unused Storage capacity was 3,224.863 GB.


Note: The configured Storage Devices may include additional storage capacity reserved for system overhead, which is not accessible for application use. That storage capacity may not be included in the value presented for Physical Storage Capacity.



SPC-1 Storage Capacities		
Storage Hierarchy Component	Units	Capacity
Total ASU Capacity	Gigabytes (GB)	17,175.474
Addressable Storage Capacity	Gigabytes (GB)	17,175.474
Configured Storage Capacity	Gigabytes (GB)	37,177.237
Physical Storage Capacity	Gigabytes (GB)	38,400.000
Data Protection (<i>Mirroring</i>)	Gigabytes (GB)	18,580.029
Required Storage (<i>system volume/mirror</i>)	Gigabytes (GB)	17.180
Global Storage Overhead	Gigabytes (GB)	807.010
Total Unused Storage	Gigabytes (GB)	3,224.863


SPC-1 Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	100.00%	46.20%	44.73%
Required for Data Protection (<i>Mirroring</i>)		49.98%	48.39%
Addressable Storage Capacity		46.20%	44.73%
Required Storage (<i>system volume/mirror</i>)		0.05%	0.04%
Configured Storage Capacity			96.82%
Global Storage Overhead			2.10%
Unused Storage:			
Addressable	0.00%		
Configured		7.56%	
Physical			1.08%

SPC-1 Storage Capacity Charts

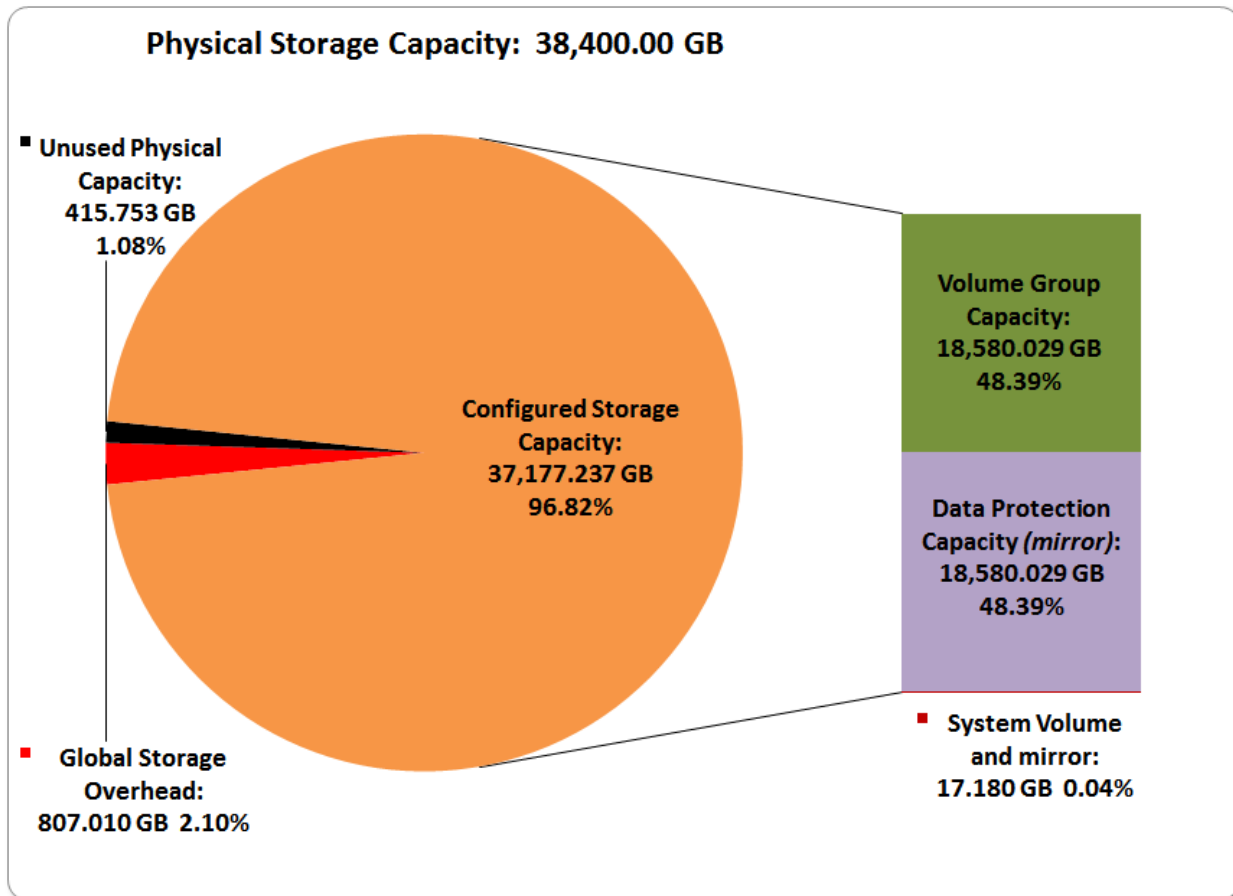

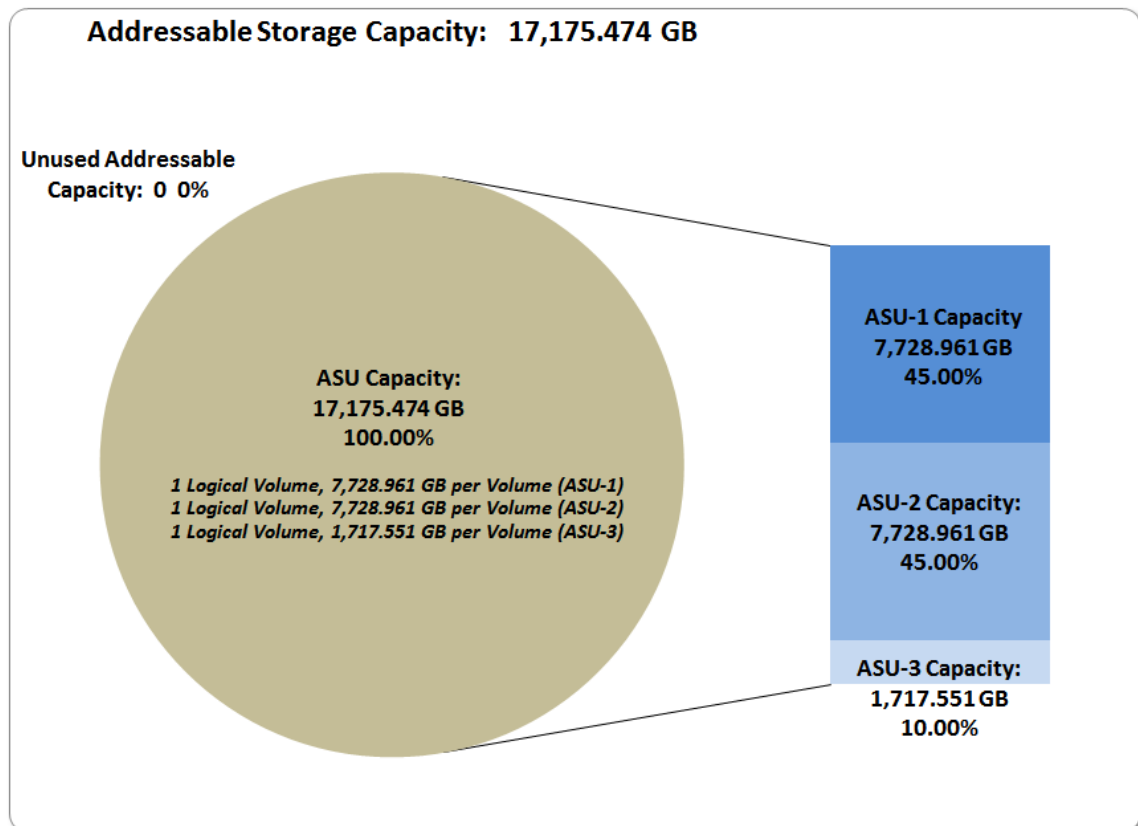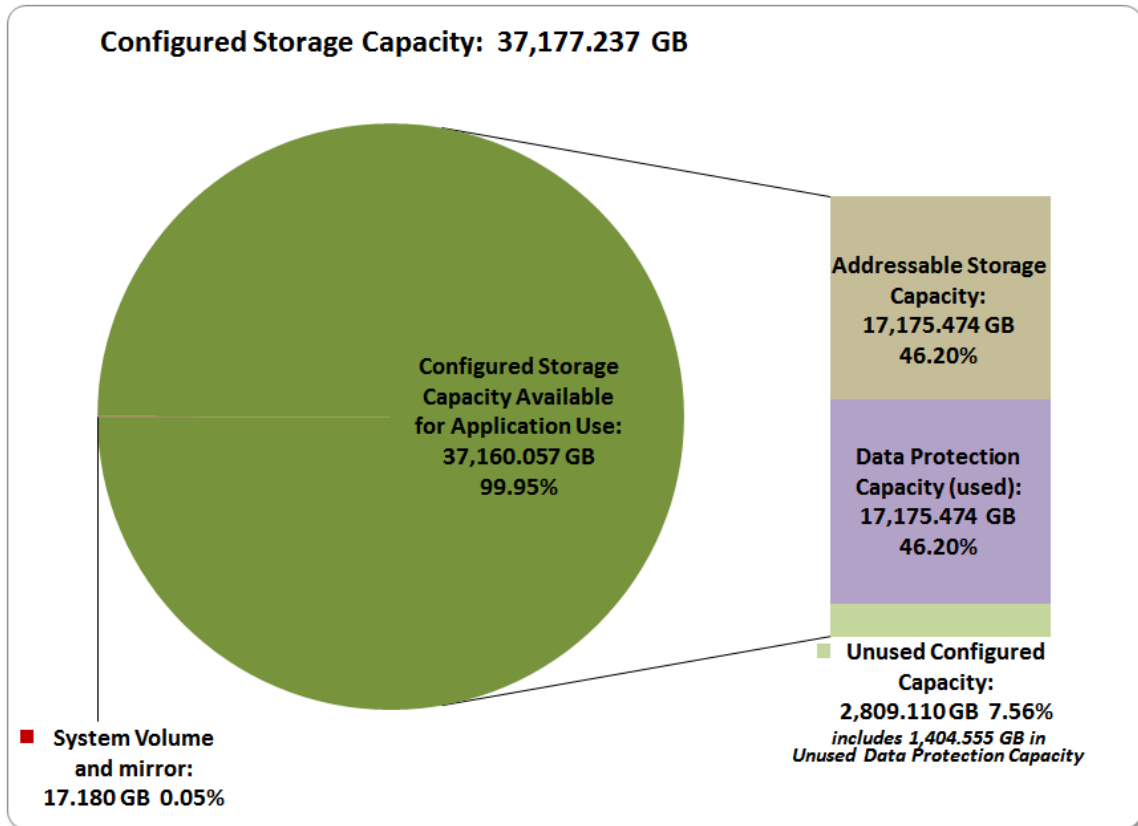

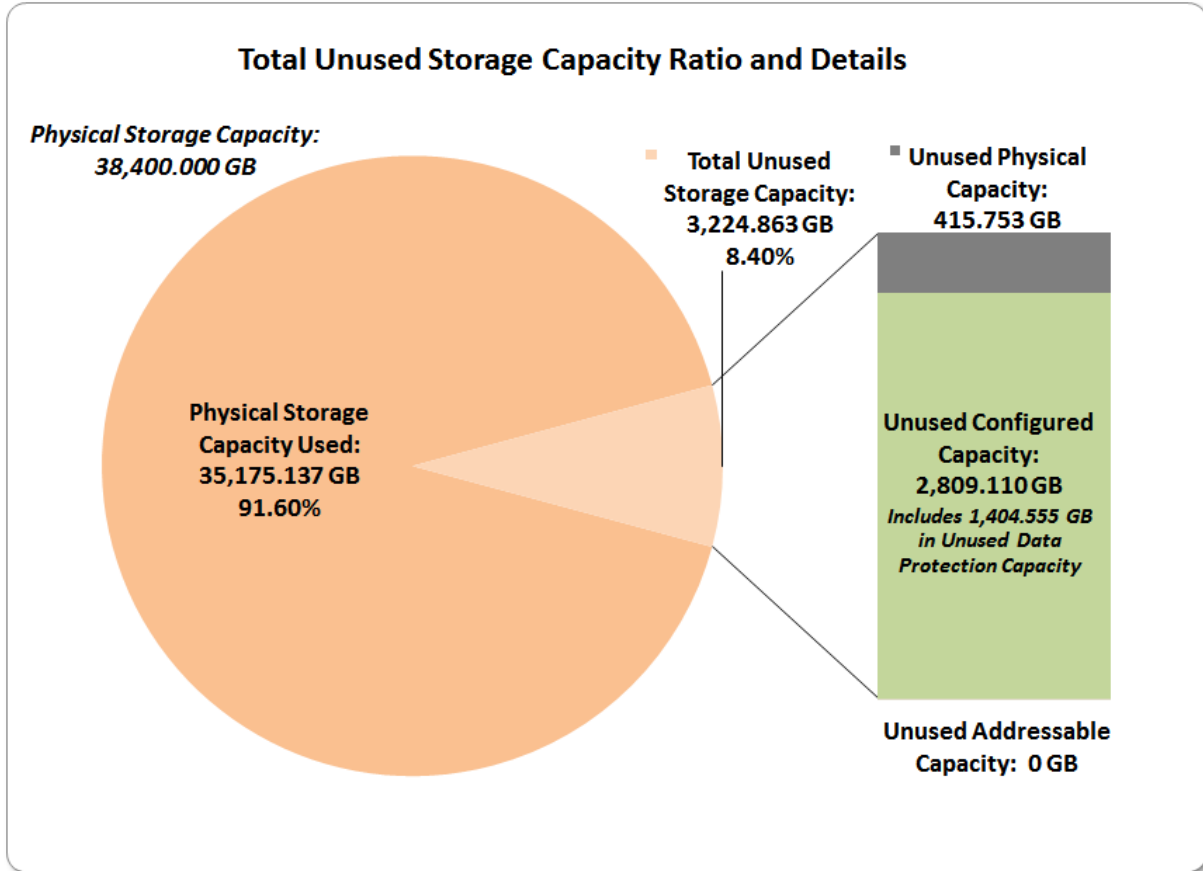

Storage Capacity Utilization

Clause 9.4.3.6.2

The FDR will include a table illustrating the storage capacity utilization values defined for Application Utilization (Clause 2.8.1), Protected Application Utilization (Clause 2.8.2), and Unused Storage Ratio (Clause 2.8.3).

Clause 2.8.1

Application Utilization is defined as Total ASU Capacity divided by Physical Storage Capacity.

Clause 2.8.2

Protected Application Utilization is defined as (Total ASU Capacity plus total Data Protection Capacity minus unused Data Protection Capacity) divided by Physical Storage Capacity.

Clause 2.8.3

Unused Storage Ratio is defined as Total Unused Capacity divided by Physical Storage Capacity and may not exceed 45%.

SPC-1 Storage Capacity Utilization	
Application Utilization	44.73%
Protected Application Utilization	89.46%
Unused Storage Ratio	8.40%

Logical Volume Capacity and ASU Mapping

Clause 9.4.3.6.3

A table illustrating the capacity of each ASU and the mapping of Logical Volumes to ASUs shall be provided in the FDR. ... Logical Volumes shall be sequenced in the table from top to bottom per its position in the contiguous address space of each ASU. The capacity of each Logical Volume shall be stated. ... In conjunction with this table, the Test Sponsor shall provide a complete description of the type of data protection (see Clause 2.4.5) used on each Logical Volume.

Logical Volume Capacity and Mapping
ASU-1 (7,728.961 GB)
1 Logical Volume 7,728.961 GB per Logical Volume (7,728.961 GB used per Logical Volume)
ASU-2 (7,728.961 GB)
1 Logical Volume 7,728.961 GB per Logical Volume (7,728.961 GB used per Logical Volume)
ASU-3 (1,717.551 GB)
1 Logical Volume 1,717.551 GB per Logical Volume (1,717.551 GB used per Logical Volume)

The Data Protection Level used for all Logical Volumes was [Protected 2](#) using *Mirroring* as described on page [12](#). See “ASU Configuration” in the [IOPS Test Results File](#) for more detailed configuration information.

SPC-1 BENCHMARK EXECUTION RESULTS

This portion of the Full Disclosure Report documents the results of the various SPC-1 Tests, Test Phases, and Test Runs. An [SPC-1 glossary](#) on page 63 contains definitions of terms specific to the SPC-1 Tests, Test Phases, and Test Runs.

Clause 5.4.3

The Tests must be executed in the following sequence: Primary Metrics, Repeatability, and Data Persistence. That required sequence must be uninterrupted from the start of Primary Metrics to the completion of Persistence Test Run 1. Uninterrupted means the Benchmark Configuration shall not be power cycled, restarted, disturbed, altered, or adjusted during the above measurement sequence. If the required sequence is interrupted other than for the Host System/TSC power cycle between the two Persistence Test Runs, the measurement is invalid.

SPC-1 Tests, Test Phases, and Test Runs

The SPC-1 benchmark consists of the following Tests, Test Phases, and Test Runs:

- **Primary Metrics Test**
 - Sustainability Test Phase and Test Run
 - IOPS Test Phase and Test Run
 - Response Time Ramp Test Phase
 - 95% of IOPS Test Run
 - 90% of IOPS Test Run
 - 80% of IOPS Test Run
 - 50% of IOPS Test Run
 - 10% of IOPS Test Run (LRT)
- **Repeatability Test**
 - Repeatability Test Phase 1
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
 - Repeatability Test Phase 2
 - 10% of IOPS Test Run (LRT)
 - IOPS Test Run
- **Data Persistence Test**
 - Data Persistence Test Run 1
 - Data Persistence Test Run 2

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

“Ramp-Up” Test Runs

Clause 5.3.13

In order to warm-up caches or perform the initial ASU data migration in a multi-tier configuration, a Test Sponsor may perform a series of “Ramp-Up” Test Runs as a substitute for an initial, gradual Ramp-Up.

Clause 5.3.13.3

The “Ramp-Up” Test Runs will immediately precede the Primary Metrics Test as part of the uninterrupted SPC-1 measurement sequence.

Clause 9.4.3.7.1

If a series of “Ramp-Up” Test Runs were included in the SPC-1 measurement sequence, the FDR shall report the duration (ramp-up and measurement interval), BSU level, SPC-1 IOPS and average response time for each “Ramp-Up” Test Run in an appropriate table.

There were no “Ramp-Up” Test Runs executed.

Primary Metrics Test – Sustainability Test Phase

Clause 5.4.4.1.1

The Sustainability Test Phase has exactly one Test Run and shall demonstrate the maximum sustainable I/O Request Throughput within at least a continuous eight (8) hour Measurement Interval. This Test Phase also serves to insure that the TSC has reached Steady State prior to reporting the final maximum I/O Request Throughput result (SPC-1 IOPS™).

Clause 5.4.4.1.2

The computed I/O Request Throughput of the Sustainability Test must be within 5% of the reported SPC-1 IOPS™ result.

Clause 5.4.4.1.4

The Average Response Time, as defined in Clause 5.1.1, will be computed and reported for the Sustainability Test Run and cannot exceed 30 milliseconds. If the Average Response time exceeds that 30-milliseconds constraint, the measurement is invalid.

Clause 9.4.3.7.2

For the Sustainability Test Phase the FDR shall contain:

- 1. A Data Rate Distribution graph and data table.*
- 2. I/O Request Throughput Distribution graph and data table.*
- 3. A Response Time Frequency Distribution graph and table.*
- 4. An Average Response Time Distribution graph and table.*
- 5. The human readable Test Run Results File produced by the Workload Generator (may be included in an appendix).*
- 6. A listing or screen image of all input parameters supplied to the Workload Generator (may be included in an appendix).*
- 7. The Measured Intensity Multiplier for each I/O stream.*
- 8. The variability of the Measured Intensity Multiplier, as defined in Clause 5.3.13.3.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page 73.

Sustainability Test Results File

A link to the test results file generated from the Sustainability Test Run is listed below.


[Sustainability Test Results File](#)

Sustainability – Data Rate Distribution Data (MB/second)

The Sustainability Data Rate table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Data Rate Table](#)

Sustainability – Data Rate Distribution Graph

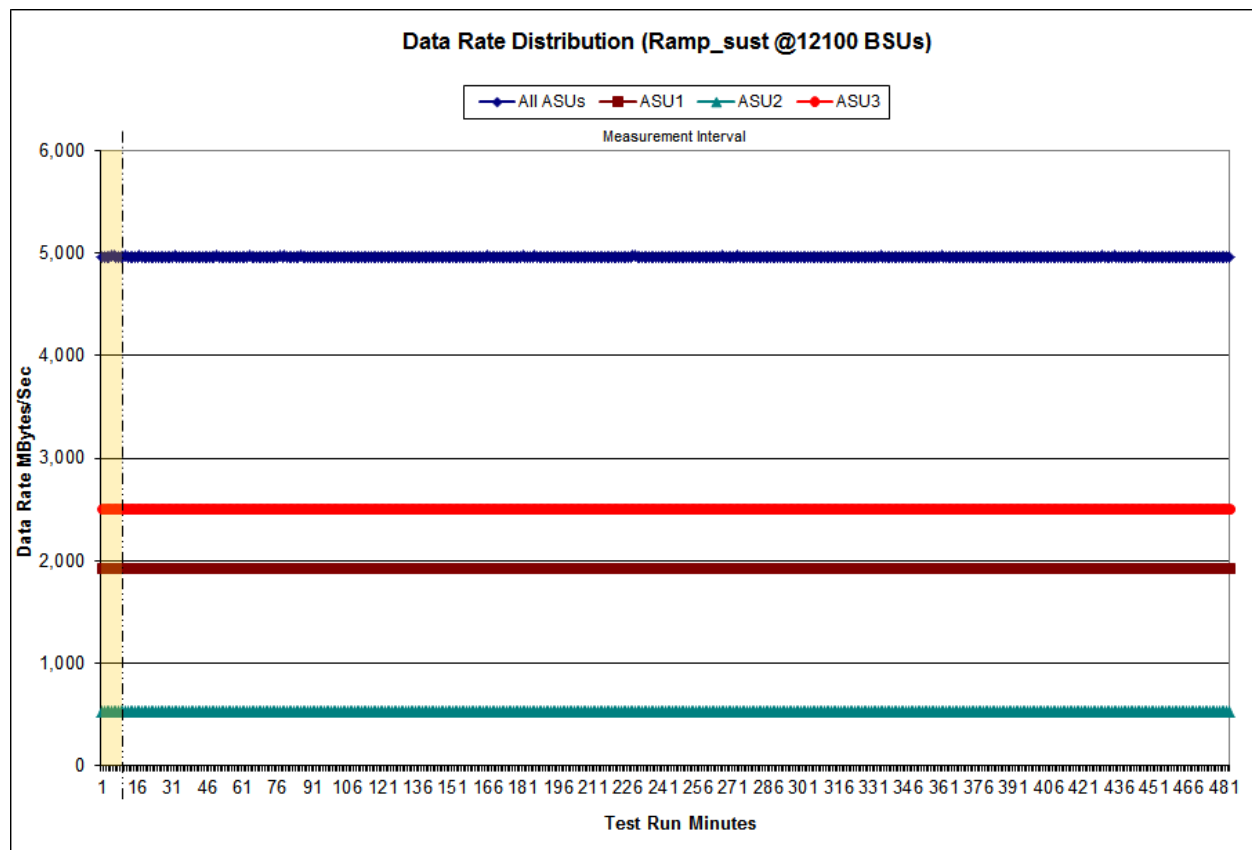


Sustainability – I/O Request Throughput Distribution Data

The Sustainability I/O Request Throughput table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability I/O Request Throughput Table](#)

Sustainability – I/O Request Throughput Distribution Graph

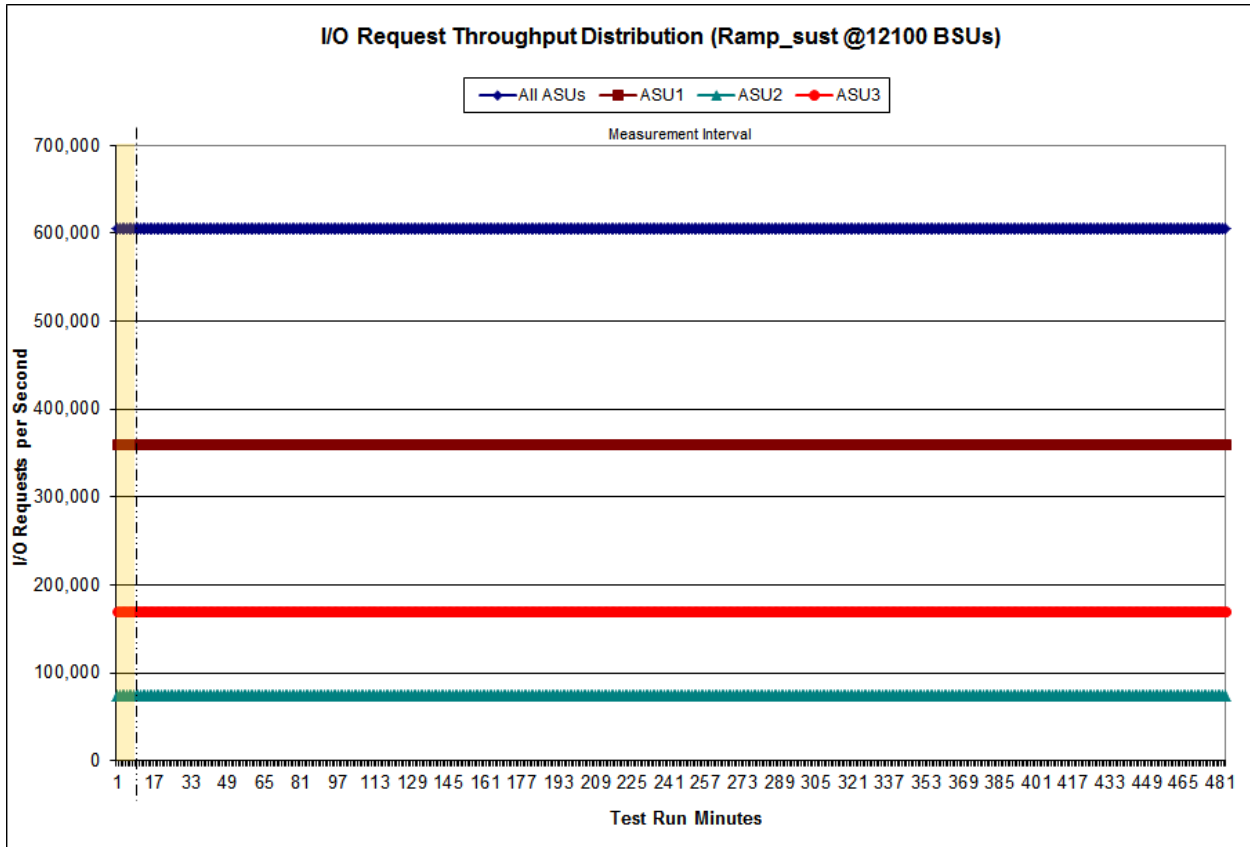


Sustainability – Average Response Time (ms) Distribution Data

The Sustainability Average Response Time table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Average Response Time Table](#)


Sustainability – Average Response Time (ms) Distribution Graph

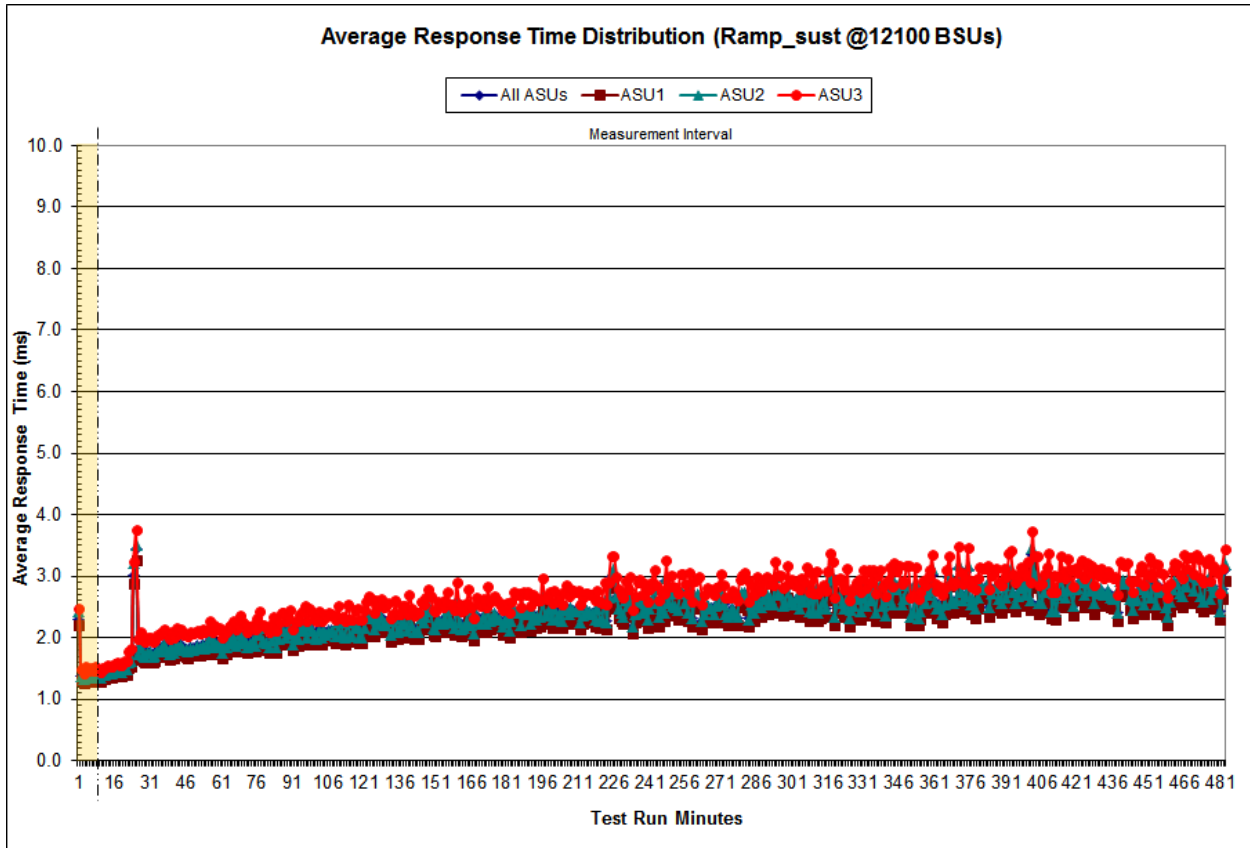

Sustainability – Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	28,801,511	165,917,060	865,564,298	1,241,911,037	1,103,696,449	691,141,273	476,210,135	335,835,878
Write	499	43,758,614	759,001,135	1,558,068,298	1,728,464,193	1,270,129,356	866,664,285	586,509,718
All ASUs	28,802,010	209,675,674	1,624,565,433	2,799,979,335	2,832,160,642	1,961,270,629	1,342,874,420	922,345,596
ASU1	27,776,651	177,130,742	1,116,486,678	1,769,650,194	1,692,731,651	1,123,432,699	761,990,281	525,111,772
ASU2	1,025,235	16,388,473	197,426,873	351,308,282	352,961,652	239,948,056	164,373,433	113,901,885
ASU3	124	16,156,459	310,651,882	679,020,859	786,467,339	597,889,874	416,510,706	283,331,939
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	526,086,016	365,636,833	289,487,637	178,820,572	137,583,204	97,077,980	134,693,929	78,567,377
Write	853,597,912	530,726,339	420,156,702	311,841,885	271,621,675	212,150,130	335,813,539	233,797,200
All ASUs	1,379,683,928	896,363,172	709,644,339	490,662,457	409,204,879	309,228,110	470,507,468	312,364,577
ASU1	796,076,931	527,557,498	416,966,690	279,205,859	228,043,502	169,229,694	251,504,535	162,017,082
ASU2	173,023,006	114,508,404	91,779,689	61,888,287	50,587,663	37,616,987	56,292,248	36,579,839
ASU3	410,583,991	254,297,270	200,897,960	149,568,311	130,573,714	102,381,429	162,710,685	113,767,656
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	46,652,709	28,333,689	17,466,629	30,321,516	8,260,200	4,359,289	2,915,194	16,541,042
Write	162,224,489	110,963,025	75,354,703	141,268,360	31,363,178	12,041,262	6,581,474	29,825,116
All ASUs	208,877,198	139,296,714	92,821,332	171,589,876	39,623,378	16,400,551	9,496,668	46,366,158
ASU1	105,549,197	68,989,636	45,168,918	81,598,443	19,085,422	8,360,816	5,051,062	25,861,189
ASU2	24,022,852	15,799,574	10,393,984	18,967,092	4,537,314	2,027,512	1,241,357	6,487,411
ASU3	79,305,149	54,507,504	37,258,430	71,024,341	16,000,642	6,012,223	3,204,249	14,017,558

Sustainability – Response Time Frequency Distribution Graph

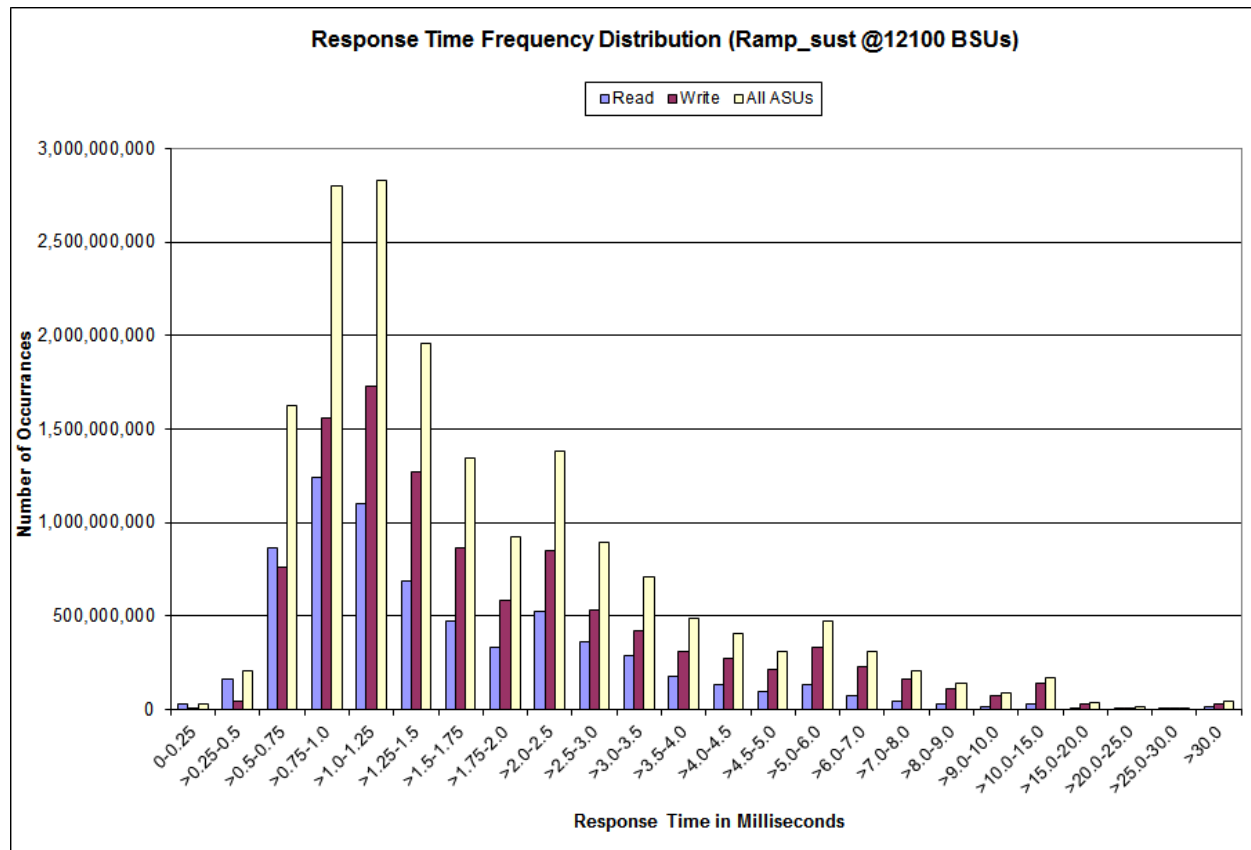

Sustainability – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.02100	0.0180	0.0700	0.0350	0.2810
COV	0.001	0.000	0.001	0.000	0.001	0.001	0.001	0.000

Primary Metrics Test – IOPS Test Phase

Clause 5.4.4.2

The IOPS Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of ten (10) minutes. The IOPS Test Phase immediately follows the Sustainability Test Phase without any interruption or manual intervention.

The IOPS Test Run generates the SPC-1 IOPS™ primary metric, which is computed as the I/O Request Throughput for the Measurement Interval of the IOPS Test Run.

The Average Response Time is computed for the IOPS Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds the 30 millisecond constraint, the measurement is invalid.

Clause 9.4.3.7.3

For the IOPS Test Phase the FDR shall contain:

- 1. I/O Request Throughput Distribution (data and graph).*
- 2. A Response Time Frequency Distribution.*
- 3. An Average Response Time Distribution.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*
- 6. The total number of I/O Requests completed in the Measurement Interval as well as the number of I/O Requests with a Response Time less than or equal to 30 milliseconds and the number of I/O Requests with a Response Time greater than 30 milliseconds.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [73](#).

IOPS Test Results File


A link to the test results file generated from the IOPS Test Run is listed below.

[IOPS Test Results File](#)

IOPS Test Run – I/O Request Throughput Distribution Data

12,100 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:58:59	20:02:00	0-2	0:03:01
<i>Measurement Interval</i>	20:02:00	20:12:00	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	605,228.38	360,695.78	74,466.12	170,066.48
1	604,919.10	360,482.80	74,413.88	170,022.42
2	605,096.67	360,594.92	74,385.00	170,116.75
3	605,091.12	360,658.07	74,468.00	169,965.05
4	604,955.17	360,503.93	74,421.73	170,029.50
5	604,850.82	360,591.60	74,425.65	169,833.57
6	605,014.87	360,527.33	74,472.33	170,015.20
7	605,000.77	360,652.87	74,386.00	169,961.90
8	605,039.20	360,680.73	74,414.07	169,944.40
9	605,209.30	360,661.42	74,475.70	170,072.18
10	605,013.55	360,588.05	74,377.83	170,047.67
11	605,044.18	360,631.40	74,457.63	169,955.15
12	604,945.92	360,583.72	74,405.05	169,957.15
Average	605,016.49	360,607.91	74,430.40	169,978.18


IOPS Test Run – I/O Request Throughput Distribution Graph

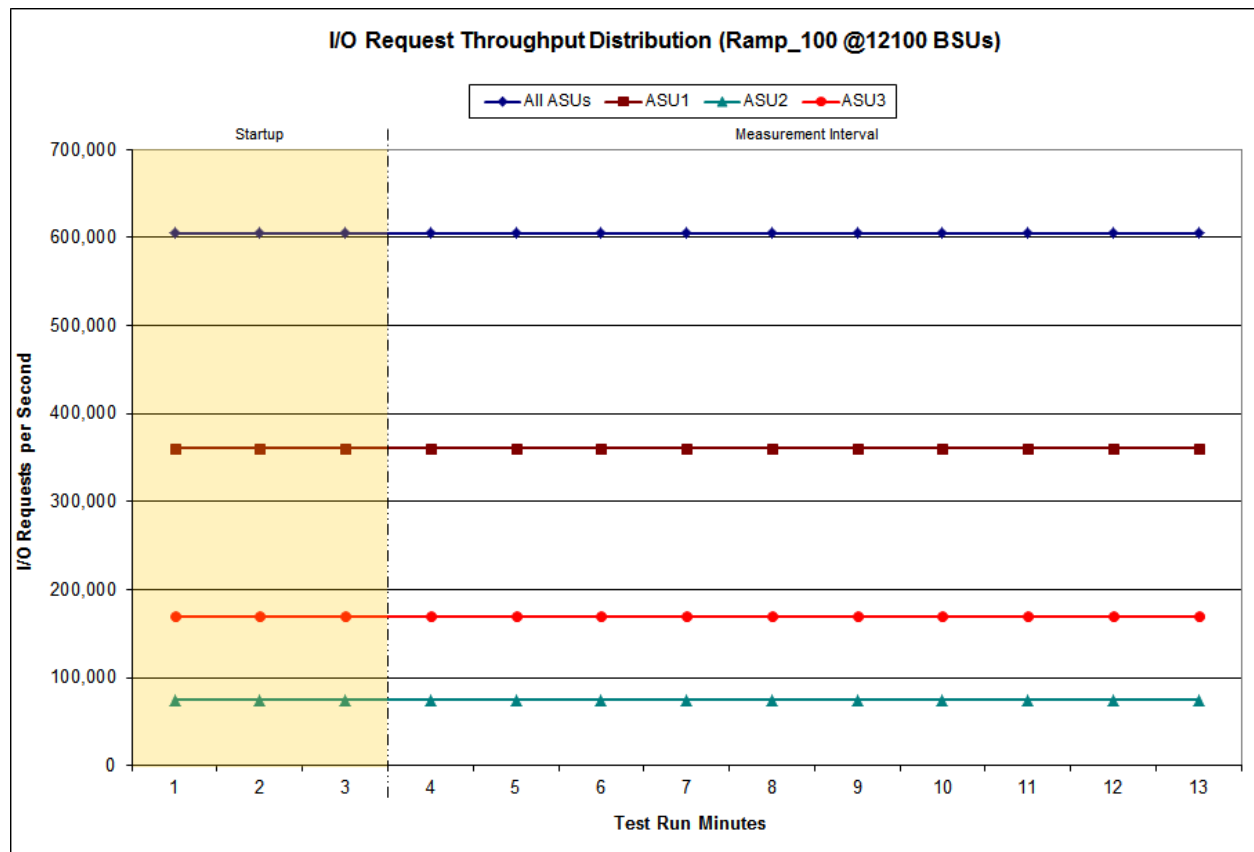

IOPS Test Run – Average Response Time (ms) Distribution Data

12,100 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	19:58:59	20:02:00	0-2	0:03:01
<i>Measurement Interval</i>	20:02:00	20:12:00	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	3.77	3.58	3.97	4.07
1	1.63	1.53	1.63	1.84
2	1.68	1.58	1.68	1.90
3	1.64	1.54	1.64	1.85
4	1.72	1.62	1.72	1.95
5	1.67	1.57	1.67	1.89
6	1.72	1.62	1.72	1.94
7	1.69	1.59	1.69	1.91
8	1.75	1.64	1.74	1.97
9	1.77	1.66	1.77	2.00
10	1.76	1.65	1.75	1.99
11	1.65	1.56	1.65	1.87
12	1.68	1.58	1.68	1.90
Average	1.71	1.60	1.70	1.93


IOPS Test Run – Average Response Time (ms) Distribution Graph

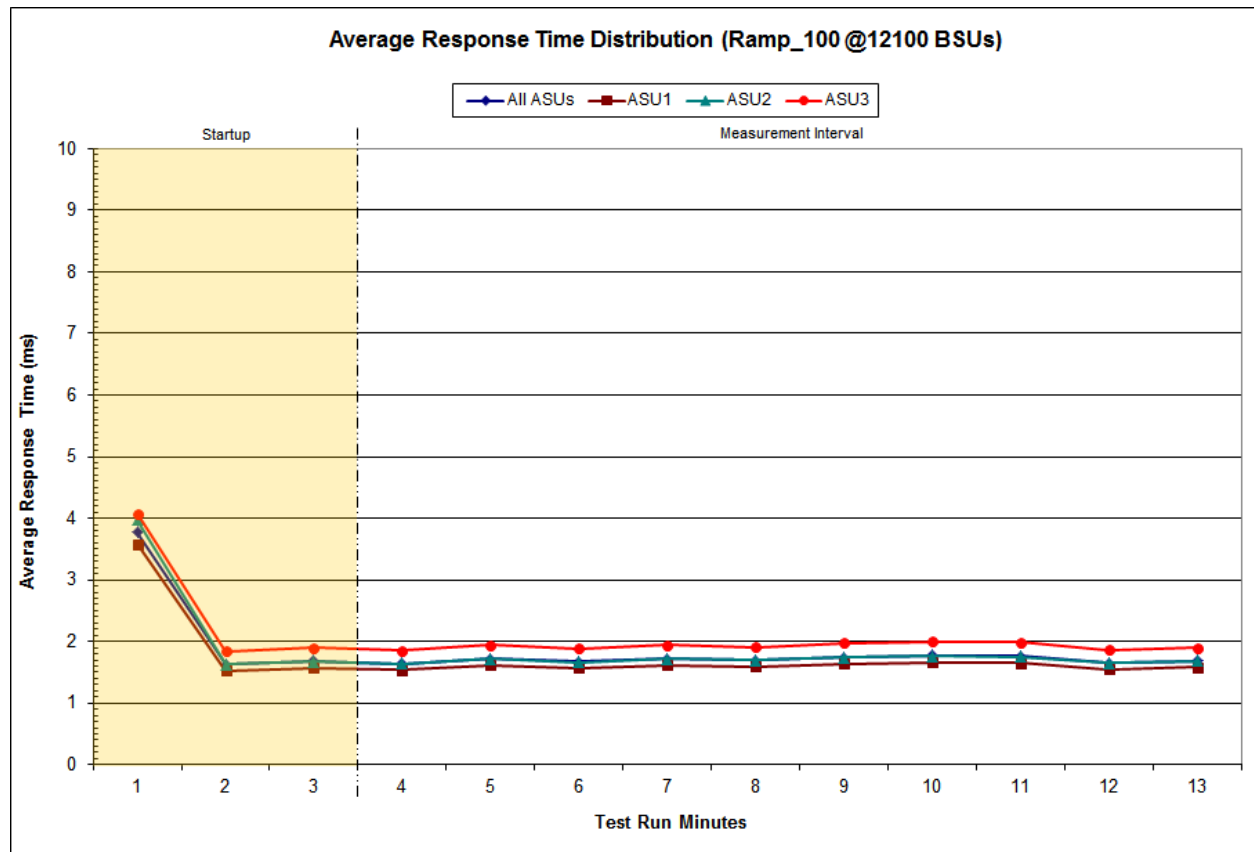

IOPS Test Run –Response Time Frequency Distribution Data

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	1,295,579	6,117,454	22,217,623	29,125,590	24,390,034	14,950,546	9,995,336	6,850,392
Write	7	1,100,175	19,555,062	38,336,473	40,727,151	28,865,160	19,272,191	12,901,163
All ASUs	1,295,586	7,217,629	41,772,685	67,462,063	65,117,185	43,815,706	29,267,527	19,751,555
ASU1	1,265,179	6,385,641	28,749,707	42,149,715	38,291,968	24,728,552	16,331,331	11,025,583
ASU2	30,403	427,516	5,017,341	8,559,743	8,224,538	5,442,115	3,642,680	2,475,333
ASU3	4	404,472	8,005,637	16,752,605	18,600,679	13,645,039	9,293,516	6,250,639
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	10,110,096	6,575,978	4,707,352	2,342,739	1,481,091	893,940	1,037,682	477,614
Write	18,100,968	10,401,263	7,537,394	5,165,406	4,195,267	3,063,679	4,377,574	2,579,795
All ASUs	28,211,064	16,977,241	12,244,746	7,508,145	5,676,358	3,957,619	5,415,256	3,057,409
ASU1	15,868,281	9,736,302	6,964,574	4,029,986	2,922,859	1,973,174	2,604,830	1,413,727
ASU2	3,576,612	2,188,607	1,605,003	939,309	678,125	458,176	606,300	331,824
ASU3	8,766,171	5,052,332	3,675,169	2,538,850	2,075,374	1,526,269	2,204,126	1,311,858
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	239,571	128,543	72,228	105,684	22,360	10,289	6,445	28,176
Write	1,485,462	848,892	484,893	651,708	86,822	26,221	14,344	49,216
All ASUs	1,725,033	977,435	557,121	757,392	109,182	36,510	20,789	77,392
ASU1	780,234	437,114	247,369	336,285	50,486	18,278	10,870	41,989
ASU2	184,499	102,791	58,366	79,533	12,355	4,469	2,604	9,843
ASU3	760,300	437,530	251,386	341,574	46,341	13,763	7,315	25,560

IOPS Test Run –Response Time Frequency Distribution Graph

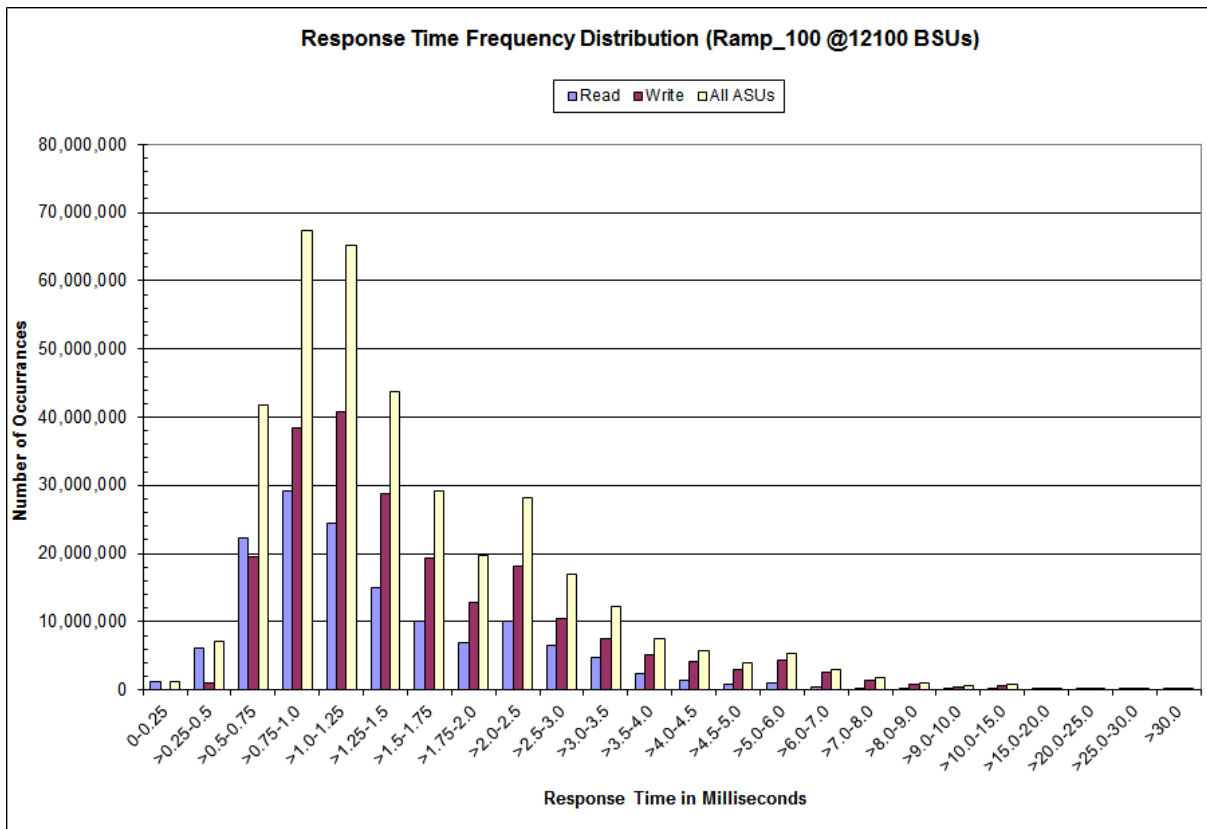

IOPS Test Run – I/O Request Information

I/O Requests Completed in the Measurement Interval
363,008,628
I/O Requests Completed with Response Time = or < 30 ms
362,931,236
I/O Requests Completed with Response Time > 30 ms
77,392

IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2809
COV	0.001	0.000	0.001	0.000	0.002	0.001	0.001	0.000

Primary Metrics Test – Response Time Ramp Test Phase

Clause 5.4.4.3

The Response Time Ramp Test Phase consists of five Test Runs, one each at 95%, 90%, 80%, 50%, and 10% of the load point (100%) used to generate the SPC-1 IOPS™ primary metric. Each of the five Test Runs has a Measurement Interval of ten (10) minutes. The Response Time Ramp Test Phase immediately follows the IOPS Test Phase without any interruption or manual intervention.

The five Response Time Ramp Test Runs, in conjunction with the IOPS Test Run (100%), demonstrate the relationship between Average Response Time and I/O Request Throughput for the Tested Storage Configuration (TSC) as illustrated in the response time/throughput curve on page 16.

In addition, the Average Response Time measured during the 10% Test Run is the value for the SPC-1 LRT™ metric. That value represents the Average Response Time of a lightly loaded TSC.

Clause 9.4.3.7.4

The following content shall appear in the FDR for the Response Time Ramp Phase:

- 1. A Response Time Ramp Distribution.*
- 2. The human readable Test Run Results File produced by the Workload Generator for each Test Run within the Response Time Ramp Test Phase.*
- 3. For the 10% Load Level Test Run (SPC-1 LRT™ metric) an Average Response Time Distribution.*
- 4. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [73](#).

Response Time Ramp Test Results File

A link to each test result file generated from each Response Time Ramp Test Run list listed below.

[95% Load Level](#)

[90% Load Level](#)

[80% Load Level](#)

[50% Load Level](#)

[10% Load Level](#)

Response Time Ramp Distribution (IOPS) Data


The five Test Runs that comprise the Response Time Ramp Phase are executed at 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit (BSU) load level used to produce the SPC-1 IOPS™ primary metric. The 100% BSU load level is included in the following Response Time Ramp data table and graph for completeness.

100% Load Level: 12,100 BSUs					95% Load Level: 11,495 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	19:58:59	20:02:00	0-3	0:03:01	Start-Up/Ramp-Up	20:15:05	20:18:06	0-3	0:03:01
Measurement Interval	20:02:00	20:12:00	3-12	0:10:00	Measurement Interval	20:18:06	20:28:06	3-12	0:10:00
<i>(60 second intervals)</i>	All ASUs	ASU-1	ASU-2	ASU-3	<i>(60 second intervals)</i>	All ASUs	ASU-1	ASU-2	ASU-3
0	605,228.38	360,695.78	74,466.12	170,066.48	0	574,899.72	342,642.58	70,741.62	161,515.52
1	604,919.10	360,482.80	74,413.88	170,022.42	1	574,726.10	342,564.95	70,729.43	161,431.72
2	605,096.67	360,594.92	74,385.00	170,116.75	2	574,723.85	342,520.60	70,695.53	161,507.72
3	605,091.12	360,658.07	74,468.00	169,965.05	3	574,751.93	342,498.62	70,735.12	161,518.20
4	604,955.17	360,503.93	74,421.73	170,029.50	4	574,724.03	342,545.73	70,701.30	161,477.00
5	604,850.82	360,591.60	74,425.65	169,833.57	5	574,748.38	342,518.22	70,754.22	161,475.95
6	605,014.87	360,527.33	74,472.33	170,015.20	6	574,675.02	342,506.37	70,757.57	161,411.08
7	605,000.77	360,652.87	74,386.00	169,961.90	7	574,677.50	342,516.35	70,678.67	161,482.48
8	605,039.20	360,680.73	74,414.07	169,944.40	8	574,920.58	342,669.40	70,712.97	161,538.22
9	605,209.30	360,661.42	74,475.70	170,072.18	9	574,800.48	342,522.17	70,699.35	161,578.97
10	605,013.55	360,588.05	74,377.83	170,047.67	10	574,793.53	342,552.12	70,681.33	161,560.08
11	605,044.18	360,631.40	74,457.63	169,955.15	11	574,855.15	342,589.35	70,716.47	161,549.33
12	604,945.92	360,583.72	74,405.05	169,957.15	12	574,641.47	342,520.83	70,664.88	161,455.75
Average	605,016.49	360,607.91	74,430.40	169,978.18	Average	574,758.81	342,543.92	70,710.19	161,504.71
90% Load Level: 10,890 BSUs					80% Load Level: 9,680 BSUs				
	Start	Stop	Interval	Duration		Start	Stop	Interval	Duration
Start-Up/Ramp-Up	20:31:08	20:34:09	0-3	0:03:01	Start-Up/Ramp-Up	20:46:58	20:49:59	0-3	0:03:01
Measurement Interval	20:34:09	20:44:09	3-12	0:10:00	Measurement Interval	20:49:59	20:59:59	3-12	0:10:00
<i>(60 second intervals)</i>	All ASUs	ASU-1	ASU-2	ASU-3	<i>(60 second intervals)</i>	All ASUs	ASU-1	ASU-2	ASU-3
0	544,376.03	324,375.83	66,995.03	153,005.17	0	484,101.27	288,602.57	59,515.35	135,983.35
1	544,494.10	324,544.25	66,953.87	152,995.98	1	483,876.42	288,445.35	59,426.38	136,004.68
2	544,432.57	324,495.63	66,935.52	153,001.42	2	484,087.53	288,532.38	59,538.48	136,016.67
3	544,562.03	324,571.58	66,988.47	153,001.98	3	483,875.72	288,441.43	59,530.78	135,903.50
4	544,333.67	324,400.55	66,926.30	153,006.82	4	484,123.50	288,542.37	59,573.47	136,007.67
5	544,552.08	324,577.22	66,945.70	153,029.17	5	483,940.63	288,409.48	59,502.98	136,028.17
6	544,364.12	324,444.62	66,963.50	152,956.00	6	483,869.18	288,374.07	59,551.32	135,943.80
7	544,431.12	324,555.77	66,967.08	152,908.27	7	484,106.42	288,495.58	59,558.08	136,052.75
8	544,463.77	324,437.17	66,924.95	153,101.65	8	483,976.87	288,520.38	59,519.78	135,936.70
9	544,431.83	324,509.50	66,904.80	153,017.53	9	483,951.27	288,431.58	59,622.12	135,897.57
10	544,495.13	324,522.15	66,908.67	153,064.32	10	483,920.28	288,449.25	59,548.07	135,922.97
11	544,469.87	324,558.15	66,972.42	152,939.30	11	483,981.20	288,418.05	59,557.13	136,006.02
12	544,482.97	324,557.27	66,956.42	152,969.28	12	483,966.72	288,487.23	59,532.37	135,947.12
Average	544,458.66	324,513.40	66,945.83	152,999.43	Average	483,971.18	288,456.94	59,549.61	135,964.63

Response Time Ramp Distribution (IOPS) Data (continued)

Start-Up/Ramp-Up Measurement Interval	21:02:27 21:05:28	21:05:28 21:15:28	0-3 3-12	0:03:01 0:10:00	Start-Up/Ramp-Up Measurement Interval	21:17:22 21:20:23	21:20:23 21:30:23	0-3 3-12	0:03:01 0:10:00
(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3	(60 second intervals)	All ASUs	ASU-1	ASU-2	ASU-3
0	302,558.17	180,264.28	37,211.75	85,082.13	0	60,560.62	36,091.13	7,463.98	17,005.50
1	302,447.58	180,281.52	37,222.05	84,944.02	1	60,513.75	36,042.10	7,451.18	17,020.47
2	302,417.72	180,215.68	37,197.12	85,004.92	2	60,494.20	36,055.80	7,425.40	17,013.00
3	302,359.63	180,168.07	37,200.68	84,990.88	3	60,512.68	36,088.98	7,450.45	16,973.25
4	302,550.47	180,349.77	37,197.25	85,003.45	4	60,532.08	36,060.17	7,465.50	17,006.42
5	302,476.88	180,255.38	37,209.62	85,011.88	5	60,490.30	36,047.22	7,446.97	16,996.12
6	302,521.00	180,324.27	37,207.82	84,988.92	6	60,468.98	36,020.77	7,427.87	17,020.35
7	302,441.83	180,290.43	37,186.53	84,964.87	7	60,456.87	36,050.35	7,417.82	16,988.70
8	302,485.75	180,284.33	37,225.45	84,975.97	8	60,471.32	36,070.07	7,425.90	16,975.35
9	302,538.77	180,279.05	37,207.78	85,051.93	9	60,512.13	36,046.47	7,439.35	17,026.32
10	302,581.47	180,329.70	37,193.10	85,058.67	10	60,490.98	36,074.10	7,412.82	17,004.07
11	302,556.93	180,349.40	37,210.98	84,996.55	11	60,522.50	36,058.87	7,447.32	17,016.32
12	302,502.75	180,331.32	37,194.62	84,976.82	12	60,503.15	36,037.85	7,421.45	17,043.85
Average	302,501.55	180,296.17	37,203.38	85,001.99	Average	60,496.10	36,055.48	7,435.54	17,005.07


Response Time Ramp Distribution (IOPS) Graph

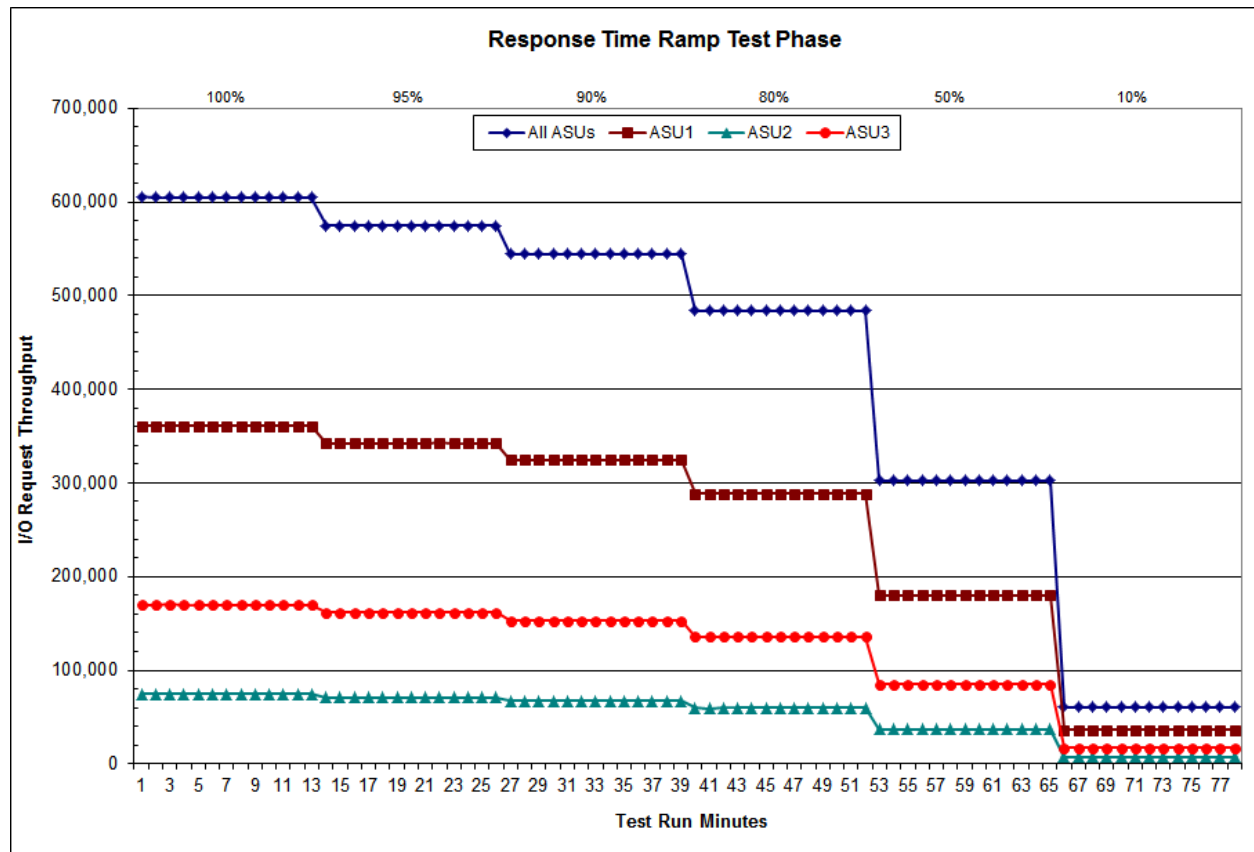

SPC-1 LRT™ Average Response Time (ms) Distribution Data

1,210 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	21:17:22	21:20:23	0-2	0:03:01
Measurement Interval	21:20:23	21:30:23	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.32	0.31	0.34	0.32
1	0.32	0.31	0.33	0.32
2	0.32	0.31	0.33	0.32
3	0.32	0.31	0.33	0.32
4	0.32	0.31	0.34	0.32
5	0.32	0.31	0.34	0.32
6	0.32	0.31	0.34	0.32
7	0.32	0.31	0.34	0.32
8	0.32	0.31	0.33	0.32
9	0.32	0.31	0.33	0.32
10	0.32	0.31	0.34	0.32
11	0.32	0.31	0.33	0.32
12	0.32	0.32	0.34	0.33
Average	0.32	0.31	0.34	0.32

SPC-1 LRT™ Average Response Time (ms) Distribution Graph

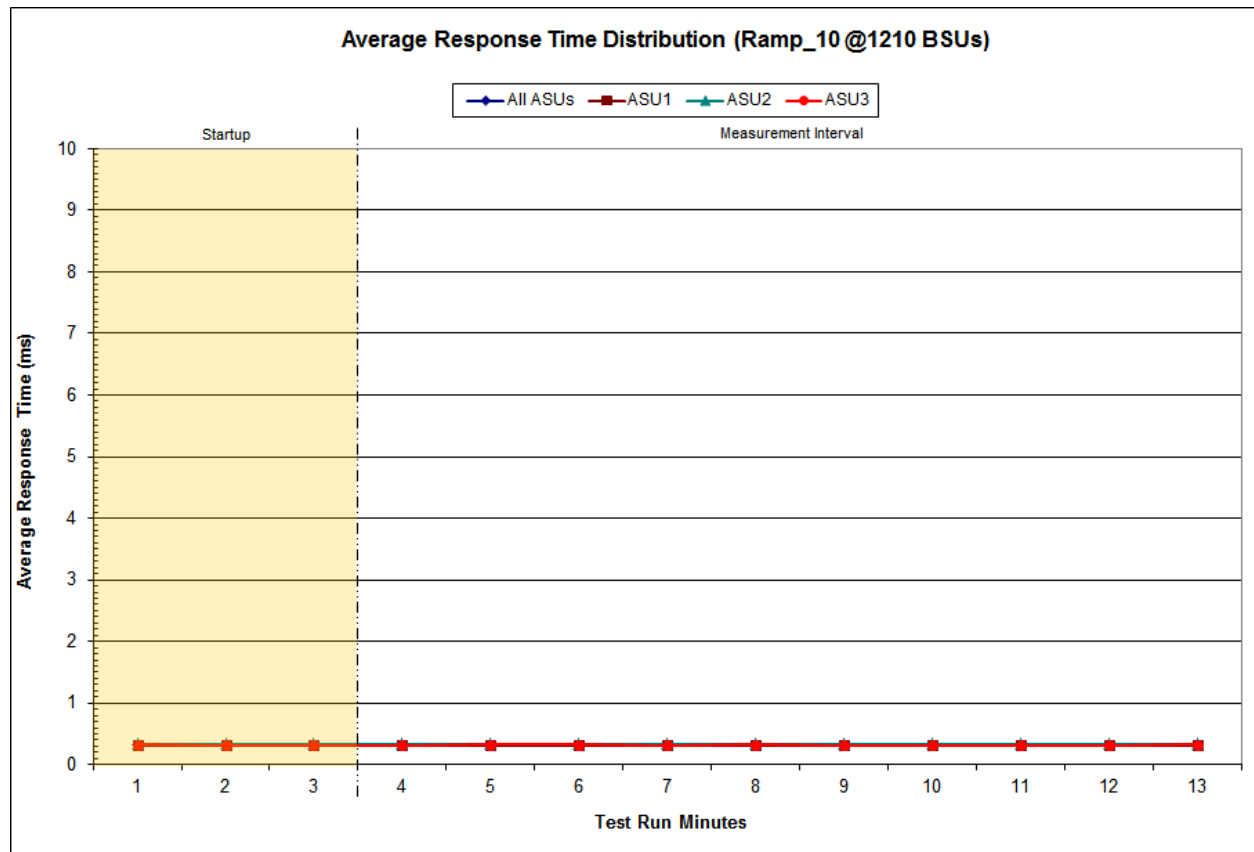

SPC-1 LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0699	0.0351	0.2811
COV	0.002	0.001	0.002	0.001	0.006	0.002	0.003	0.001

Repeatability Test

Clause 5.4.5

The Repeatability Test demonstrates the repeatability and reproducibility of the SPC-1 IOPS™ primary metric and the SPC-1 LRT™ metric generated in earlier Test Runs.

There are two identical Repeatability Test Phases. Each Test Phase contains two Test Runs. Each of the Test Runs will have a Measurement Interval of no less than ten (10) minutes. The two Test Runs in each Test Phase will be executed without interruption or any type of manual intervention.

The first Test Run in each Test Phase is executed at the 10% load point. The Average Response Time from each of the Test Runs is compared to the SPC-1 LRT™ metric. Each Average Response Time value must be less than the SPC-1 LRT™ metric plus 5% or less than the SPC-1 LRT™ metric plus one (1) millisecond (ms).

The second Test Run in each Test Phase is executed at the 100% load point. The I/O Request Throughput from the Test Runs is compared to the SPC-1 IOPS™ primary metric. Each I/O Request Throughput value must be greater than the SPC-1 IOPS™ primary metric minus 5%. In addition, the Average Response Time for each Test Run cannot exceed 30 milliseconds.

If any of the above constraints are not met, the benchmark measurement is invalid.

Clause 9.4.3.7.5

The following content shall appear in the FDR for each Test Run in the two Repeatability Test Phases:

- 1. A table containing the results of the Repeatability Test.*
- 2. An I/O Request Throughput Distribution graph and table.*
- 3. An Average Response Time Distribution graph and table.*
- 4. The human readable Test Run Results File produced by the Workload Generator.*
- 5. A listing or screen image of all input parameters supplied to the Workload Generator.*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [73](#).

Repeatability Test Results File

The values for the SPC-1 IOPS™, SPC-1 LRT™, and the Repeatability Test measurements are listed in the tables below.

	SPC-1 IOPS™
Primary Metrics	605,016.49
Repeatability Test Phase 1	604,948.73
Repeatability Test Phase 2	605,056.58

The SPC-1 IOPS™ values in the above table were generated using 100% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1 IOPS™ must be greater than 95% of the reported SPC-1 IOPS™ Primary Metric.

	SPC-1 LRT™
Primary Metrics	0.32
Repeatability Test Phase 1	0.32
Repeatability Test Phase 2	0.32

The average response time values in the SPC-1 LRT™ column were generated using 10% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1 LRT™ must be less than 105% of the reported SPC-1 LRT™ Primary Metric or less than the reported SPC-1 LRT™ Primary Metric plus one (1) millisecond (ms).

A link to the test result file generated from each Repeatability Test Run is listed below.

[Repeatability Test Phase 1, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 1, Test Run 2 \(IOPS\)](#)


[Repeatability Test Phase 2, Test Run 1 \(LRT\)](#)

[Repeatability Test Phase 2, Test Run 2 \(IOPS\)](#)

Repeatability 1 LRT – I/O Request Throughput Distribution Data

1,210 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	21:33:12	21:36:12	0-2	0:03:00
Measurement Interval	21:36:12	21:46:12	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	60,520.97	36,035.37	7,448.87	17,036.73
1	60,494.18	36,048.45	7,452.55	16,993.18
2	60,562.40	36,055.05	7,444.55	17,062.80
3	60,566.80	36,071.03	7,459.90	17,035.87
4	60,493.78	36,068.20	7,417.63	17,007.95
5	60,470.75	36,038.63	7,456.13	16,975.98
6	60,500.62	36,069.07	7,444.98	16,986.57
7	60,515.70	36,089.40	7,438.95	16,987.35
8	60,505.67	36,057.55	7,440.55	17,007.57
9	60,558.95	36,111.20	7,461.62	16,986.13
10	60,442.92	36,008.77	7,440.03	16,994.12
11	60,546.52	36,095.03	7,436.67	17,014.82
12	60,504.65	36,058.75	7,442.72	17,003.18
Average	60,510.64	36,066.76	7,443.92	16,999.95


Repeatability 1 LRT – I/O Request Throughput Distribution Graph

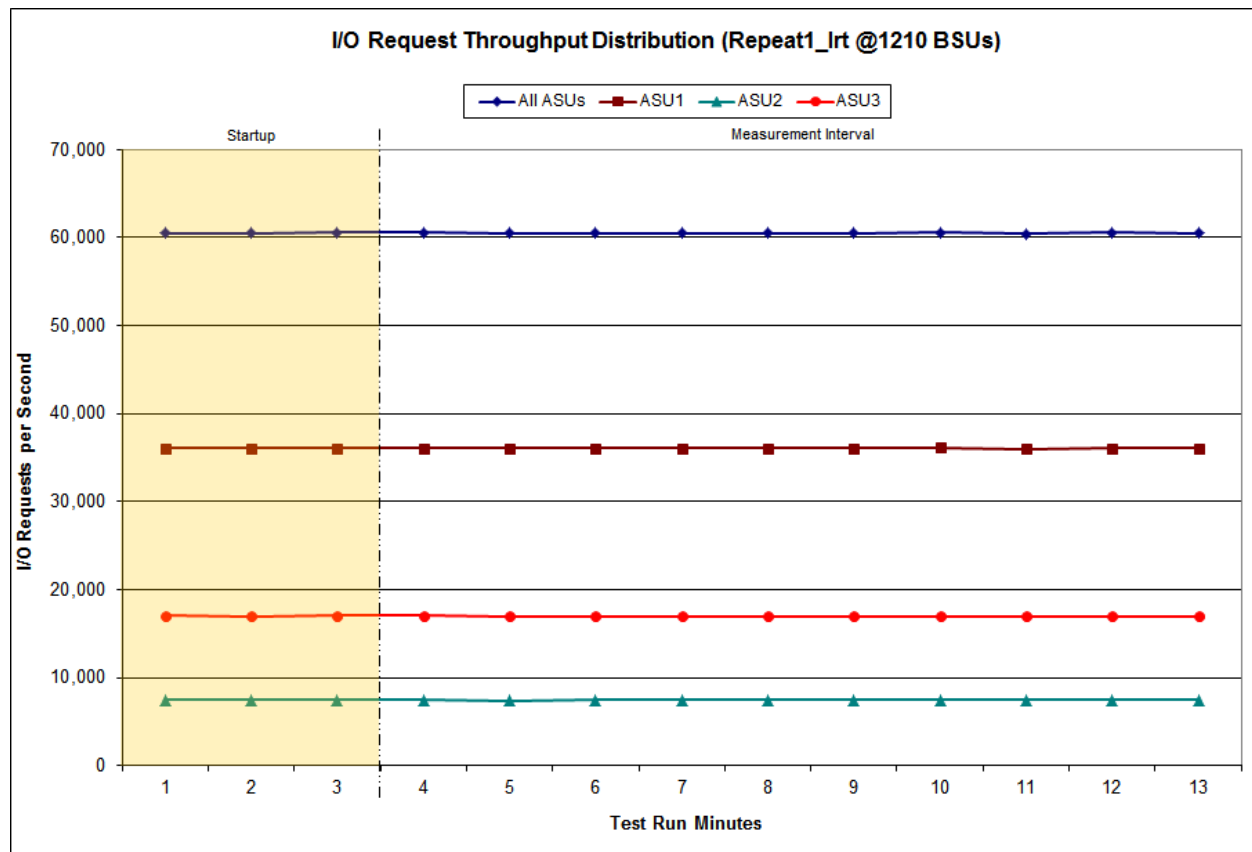

Repeatability 1 LRT –Average Response Time (ms) Distribution Data

1,210 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	21:33:12	21:36:12	0-2	0:03:00
<i>Measurement Interval</i>	21:36:12	21:46:12	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.31	0.31	0.33	0.32
1	0.32	0.31	0.33	0.32
2	0.32	0.31	0.33	0.32
3	0.31	0.31	0.33	0.32
4	0.32	0.31	0.33	0.32
5	0.32	0.31	0.33	0.32
6	0.31	0.31	0.33	0.32
7	0.32	0.31	0.33	0.32
8	0.32	0.31	0.33	0.32
9	0.32	0.31	0.34	0.32
10	0.32	0.31	0.34	0.32
11	0.32	0.31	0.33	0.32
12	0.35	0.34	0.37	0.36
Average	0.32	0.31	0.34	0.32


Repeatability 1 LRT –Average Response Time (ms) Distribution Graph

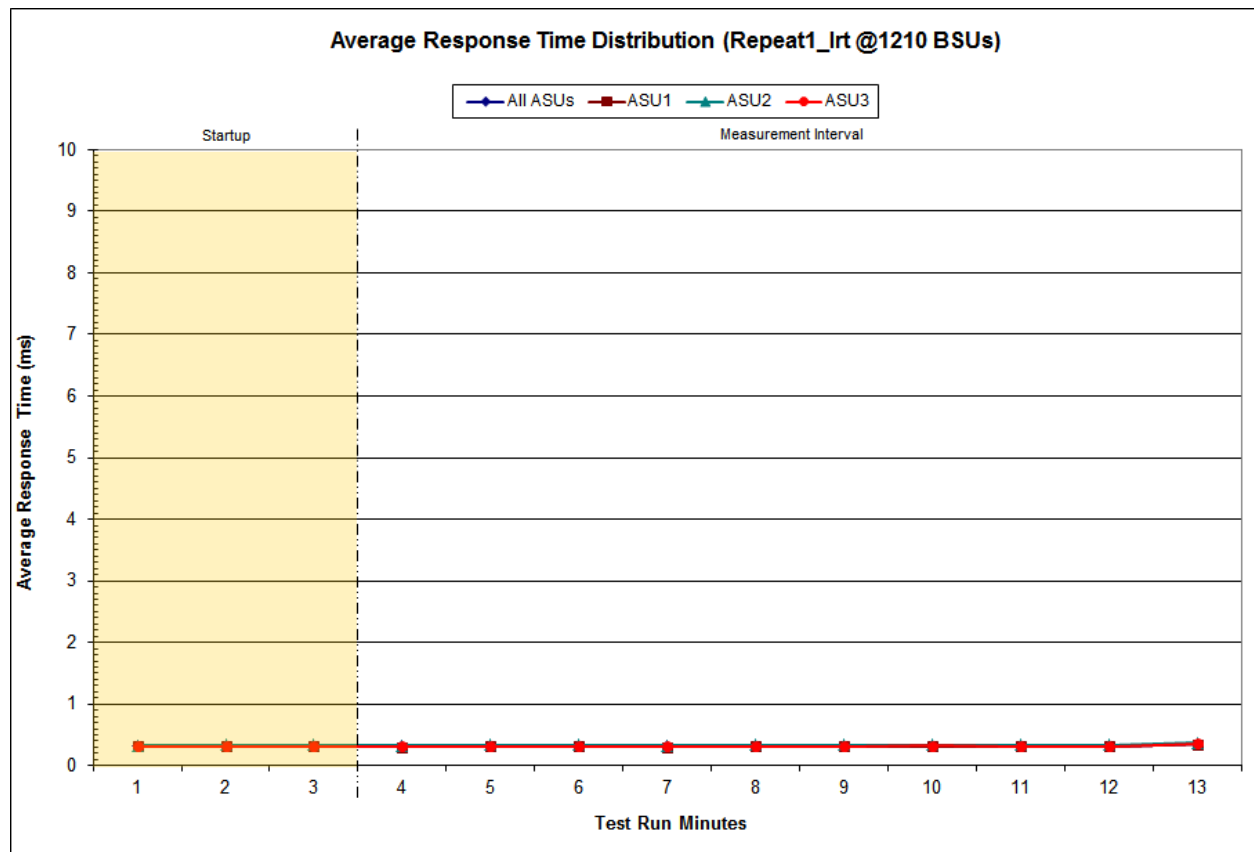

Repeatability 1 IOPS – I/O Request Throughput Distribution Data

12,100 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	21:49:49	21:52:50	0-2	0:03:01
Measurement Interval	21:52:50	22:02:50	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	605,110.52	360,617.23	74,453.47	170,039.82
1	605,175.97	360,794.30	74,322.77	170,058.90
2	604,969.33	360,444.95	74,468.37	170,056.02
3	604,841.15	360,534.80	74,392.28	169,914.07
4	605,062.85	360,616.30	74,469.52	169,977.03
5	604,938.52	360,523.98	74,377.75	170,036.78
6	604,993.98	360,631.25	74,396.58	169,966.15
7	604,839.07	360,378.27	74,432.37	170,028.43
8	605,019.02	360,667.65	74,433.35	169,918.02
9	604,835.25	360,543.22	74,319.67	169,972.37
10	604,959.52	360,547.13	74,422.37	169,990.02
11	605,049.05	360,570.08	74,453.88	170,025.08
12	604,948.92	360,494.72	74,413.73	170,040.47
Average	604,948.73	360,550.74	74,411.15	169,986.84


Repeatability 1 IOPS – I/O Request Throughput Distribution Graph

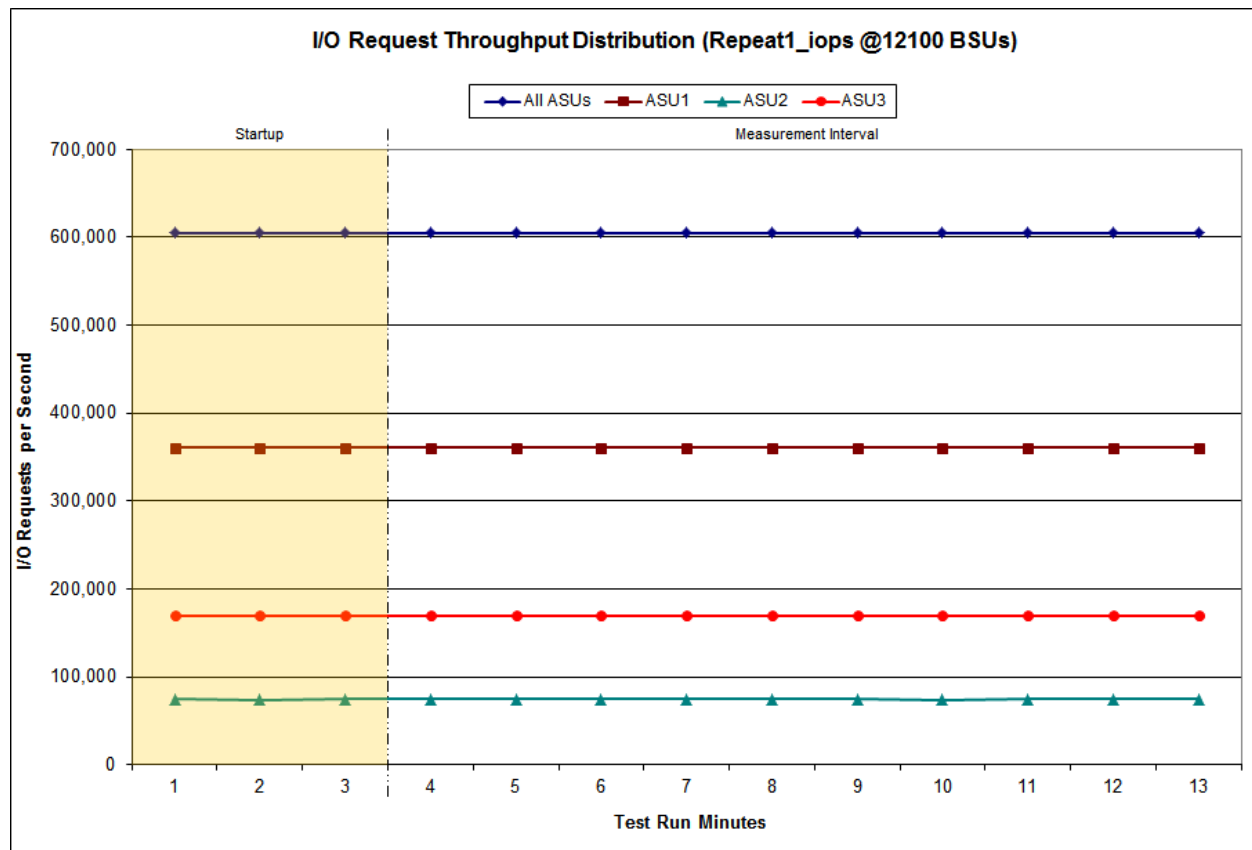

Repeatability 1 IOPS –Average Response Time (ms) Distribution Data

12,100 BSUs Start-Up/Ramp-Up Measurement Interval	Start	Stop	Interval	Duration
	21:49:49	21:52:50	0-2	0:03:01
	21:52:50	22:02:50	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	3.30	3.11	3.45	3.63
1	1.71	1.61	1.71	1.93
2	1.71	1.61	1.71	1.93
3	1.67	1.57	1.67	1.89
4	1.70	1.59	1.69	1.92
5	1.75	1.65	1.75	1.97
6	1.73	1.63	1.73	1.95
7	1.69	1.59	1.69	1.91
8	1.67	1.57	1.67	1.89
9	1.71	1.60	1.71	1.92
10	1.78	1.67	1.78	2.01
11	1.70	1.60	1.70	1.92
12	1.74	1.63	1.73	1.96
Average	1.71	1.61	1.71	1.93


Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph

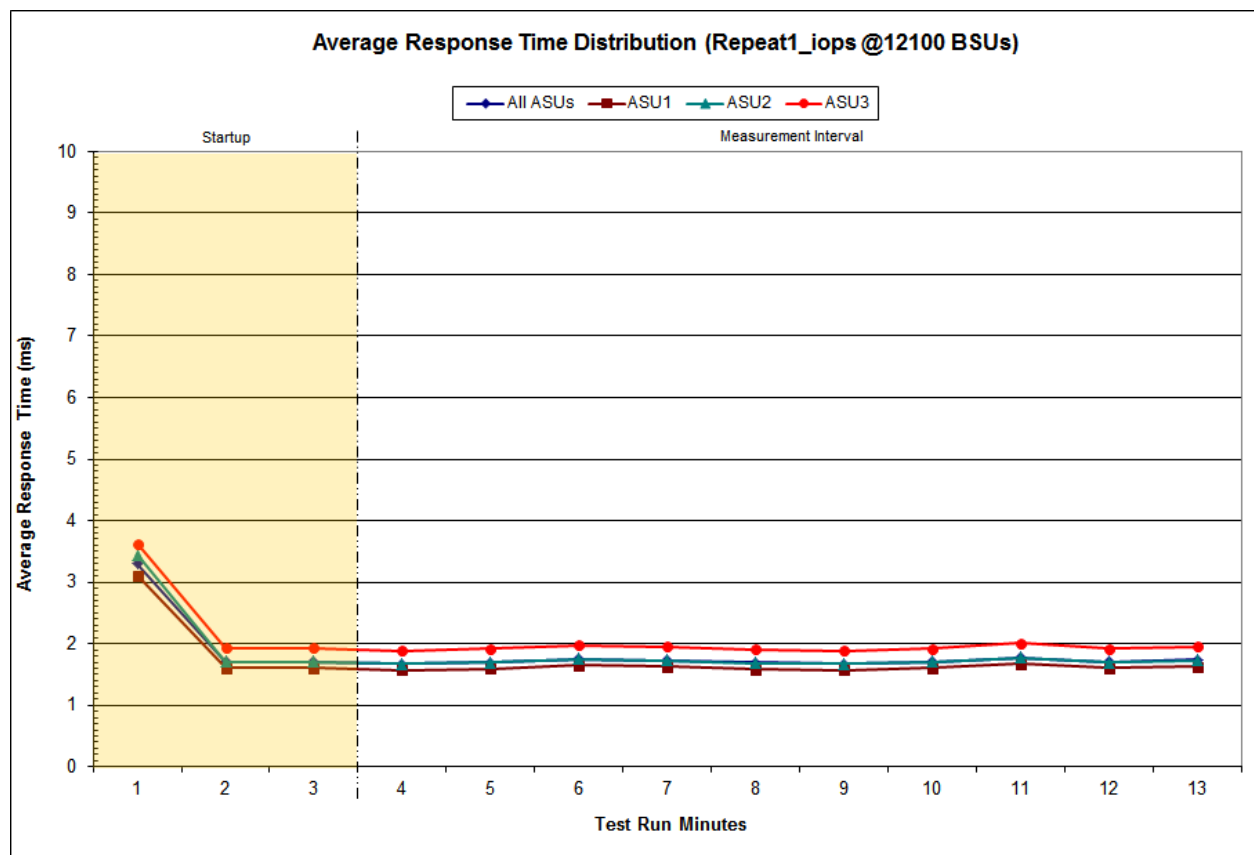

Repeatability 2 LRT – I/O Request Throughput Distribution Data

1,210 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:05:35	22:08:35	0-2	0:03:00
<i>Measurement Interval</i>	22:08:35	22:18:35	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	60,489.28	36,063.88	7,446.65	16,978.75
1	60,522.42	36,077.93	7,444.57	16,999.92
2	60,459.77	36,023.75	7,437.98	16,998.03
3	60,527.62	36,061.32	7,456.27	17,010.03
4	60,509.70	36,054.88	7,424.90	17,029.92
5	60,551.42	36,061.50	7,457.53	17,032.38
6	60,468.73	36,070.38	7,435.57	16,962.78
7	60,479.60	36,049.63	7,453.23	16,976.73
8	60,475.65	36,034.38	7,427.23	17,014.03
9	60,428.82	35,999.85	7,443.05	16,985.92
10	60,547.92	36,097.05	7,451.93	16,998.93
11	60,483.35	36,055.75	7,434.38	16,993.22
12	60,512.52	36,045.13	7,452.13	17,015.25
Average	60,498.53	36,052.99	7,443.62	17,001.92

Repeatability 2 LRT – I/O Request Throughput Distribution Graph

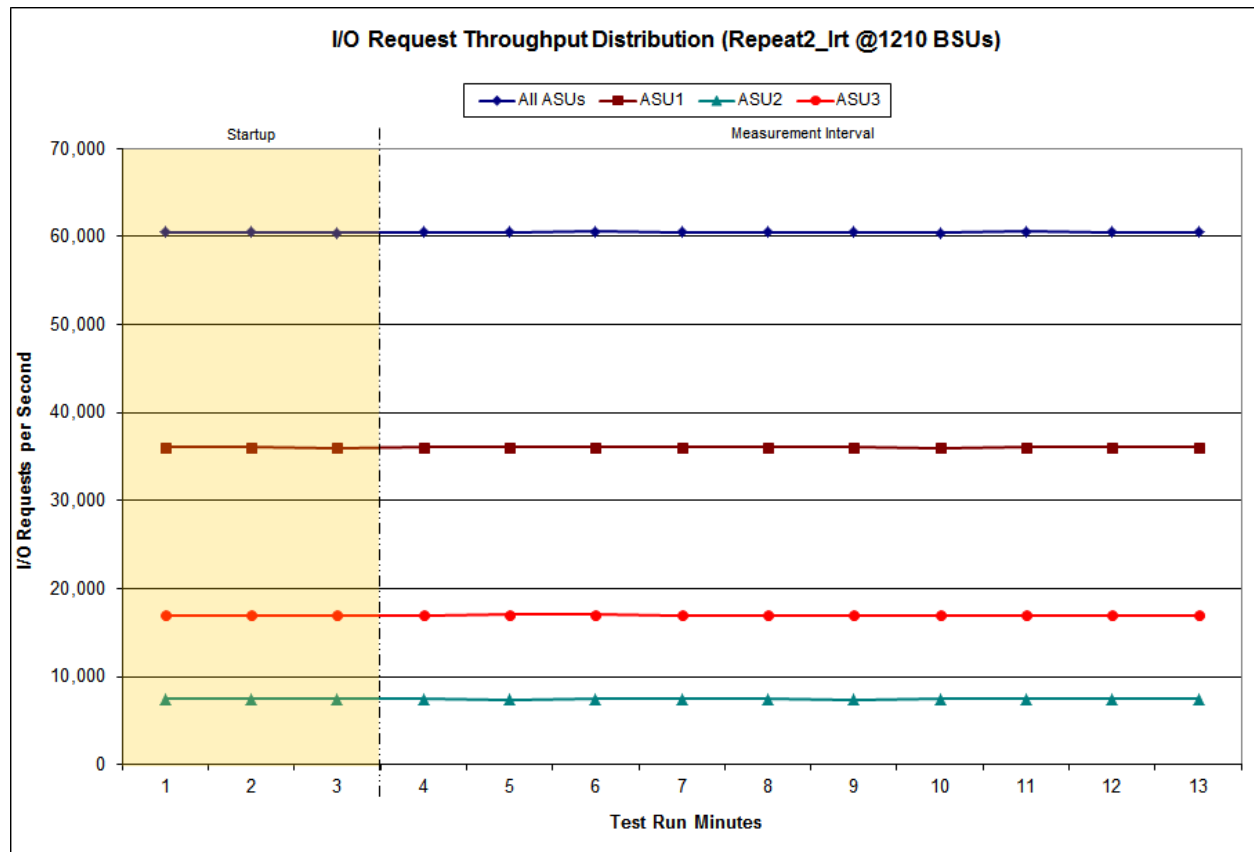


Repeatability 2 LRT –Average Response Time (ms) Distribution Data

1,210 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:05:35	22:08:35	0-2	0:03:00
<i>Measurement Interval</i>	22:08:35	22:18:35	3-12	0:10:00

60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	0.32	0.32	0.34	0.32
1	0.32	0.31	0.33	0.32
2	0.32	0.32	0.34	0.32
3	0.31	0.31	0.33	0.32
4	0.32	0.31	0.33	0.32
5	0.33	0.33	0.35	0.34
6	0.32	0.31	0.33	0.32
7	0.32	0.31	0.34	0.32
8	0.31	0.31	0.33	0.32
9	0.32	0.31	0.33	0.32
10	0.32	0.31	0.33	0.32
11	0.32	0.31	0.33	0.32
12	0.32	0.31	0.33	0.32
<i>Average</i>	<i>0.32</i>	<i>0.31</i>	<i>0.34</i>	<i>0.32</i>


Repeatability 2 LRT –Average Response Time (ms) Distribution Graph

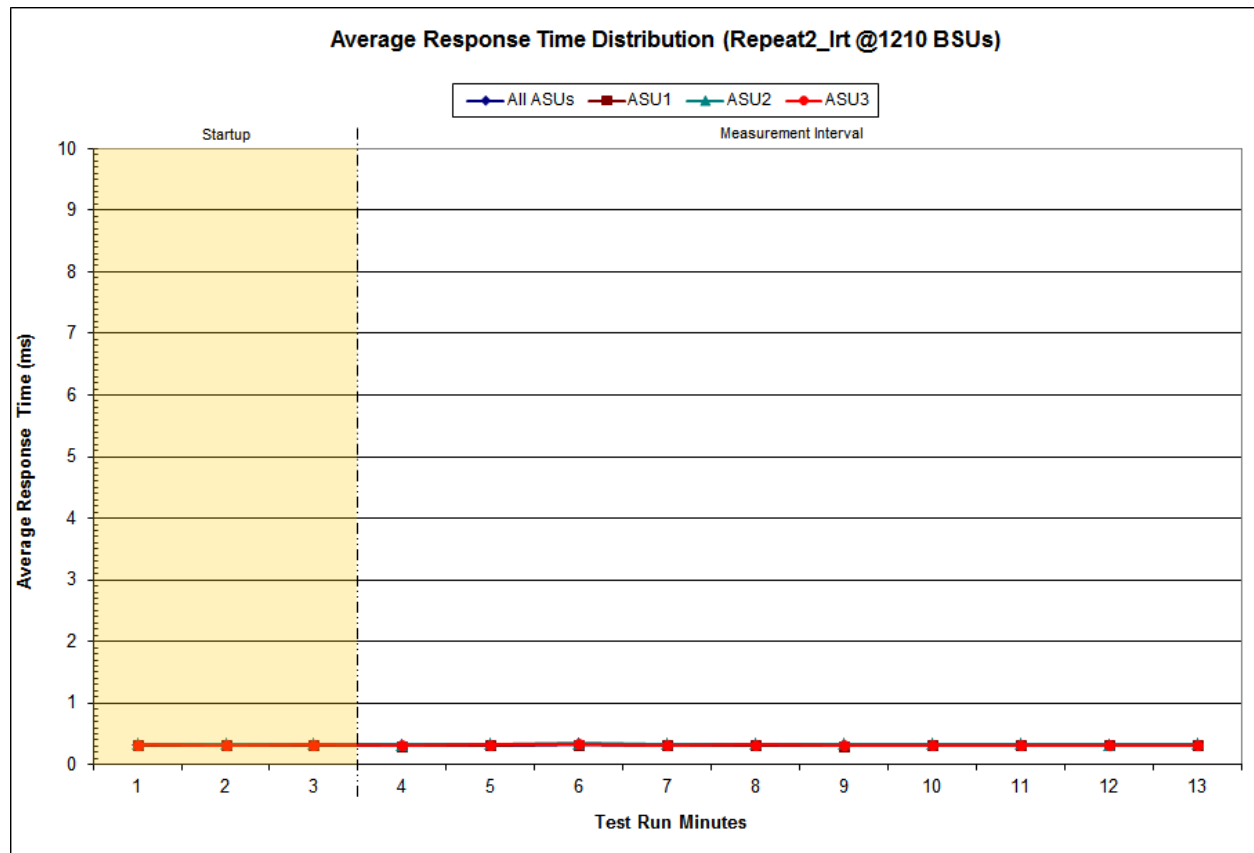

Repeatability 2 IOPS – I/O Request Throughput Distribution Data

12,100 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:22:00	22:25:01	0-2	0:03:01
Measurement Interval	22:25:01	22:35:01	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	605,022.45	360,633.73	74,434.25	169,954.47
1	605,008.72	360,636.37	74,387.22	169,985.13
2	604,993.17	360,513.32	74,444.78	170,035.07
3	604,856.67	360,452.42	74,415.23	169,989.02
4	604,952.17	360,598.93	74,356.35	169,996.88
5	605,211.10	360,667.82	74,440.68	170,102.60
6	605,026.90	360,585.40	74,435.98	170,005.52
7	605,031.97	360,604.78	74,396.40	170,030.78
8	605,141.83	360,641.43	74,473.65	170,026.75
9	605,109.43	360,672.90	74,513.57	169,922.97
10	604,950.67	360,516.97	74,393.78	170,039.92
11	605,054.12	360,578.00	74,418.73	170,057.38
12	605,230.90	360,763.87	74,420.77	170,046.27
Average	605,056.58	360,608.25	74,426.52	170,021.81


Repeatability 2 IOPS – I/O Request Throughput Distribution Graph

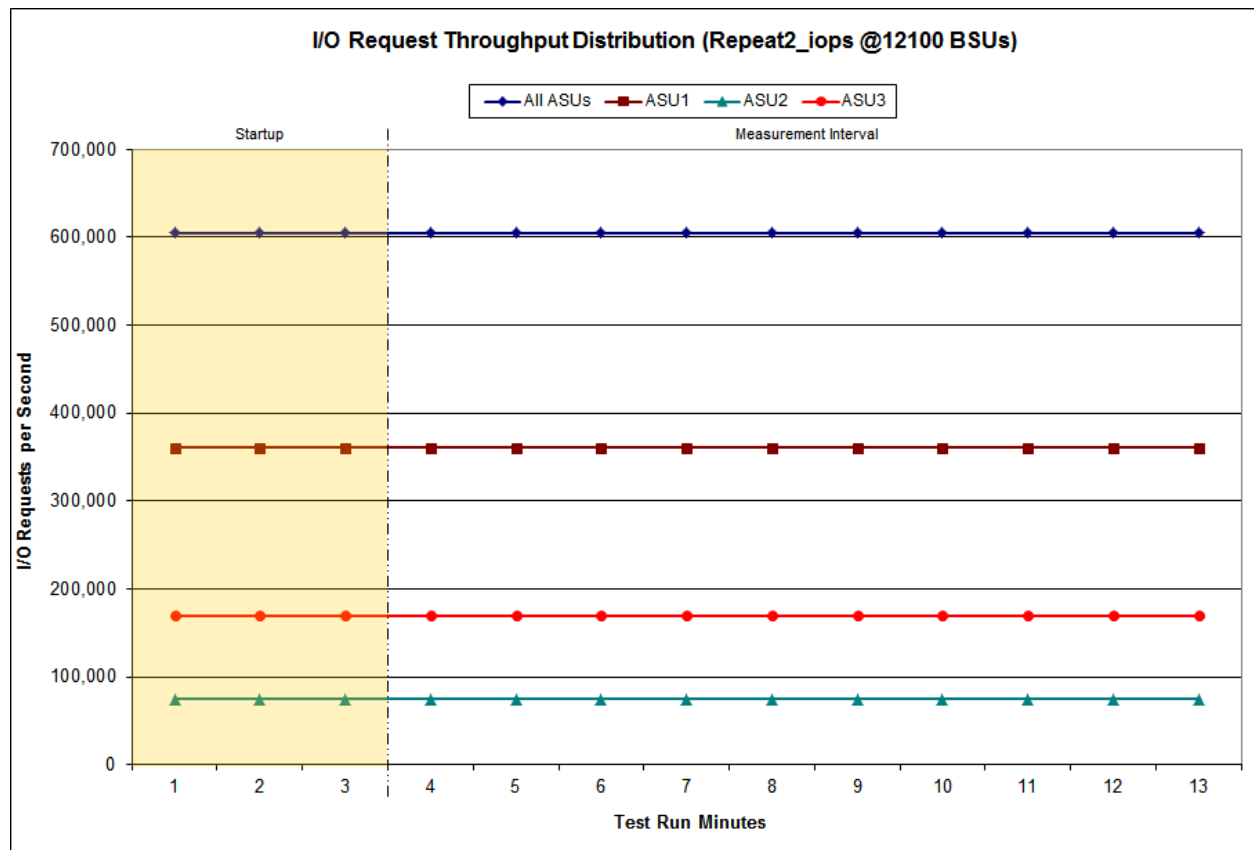

Repeatability 2 IOPS –Average Response Time (ms) Distribution Data

12,100 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:22:00	22:25:01	0-2	0:03:01
<i>Measurement Interval</i>	22:25:01	22:35:01	3-12	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.57	2.44	2.63	2.83
1	1.64	1.54	1.64	1.85
2	1.65	1.55	1.65	1.86
3	1.68	1.58	1.68	1.90
4	1.71	1.61	1.71	1.93
5	1.70	1.60	1.70	1.92
6	1.72	1.62	1.72	1.94
7	1.75	1.64	1.75	1.98
8	1.74	1.64	1.74	1.96
9	1.67	1.57	1.66	1.88
10	1.75	1.65	1.76	1.97
11	1.69	1.59	1.69	1.91
12	1.77	1.67	1.77	2.00
<i>Average</i>	<i>1.72</i>	<i>1.62</i>	<i>1.72</i>	<i>1.94</i>

Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph

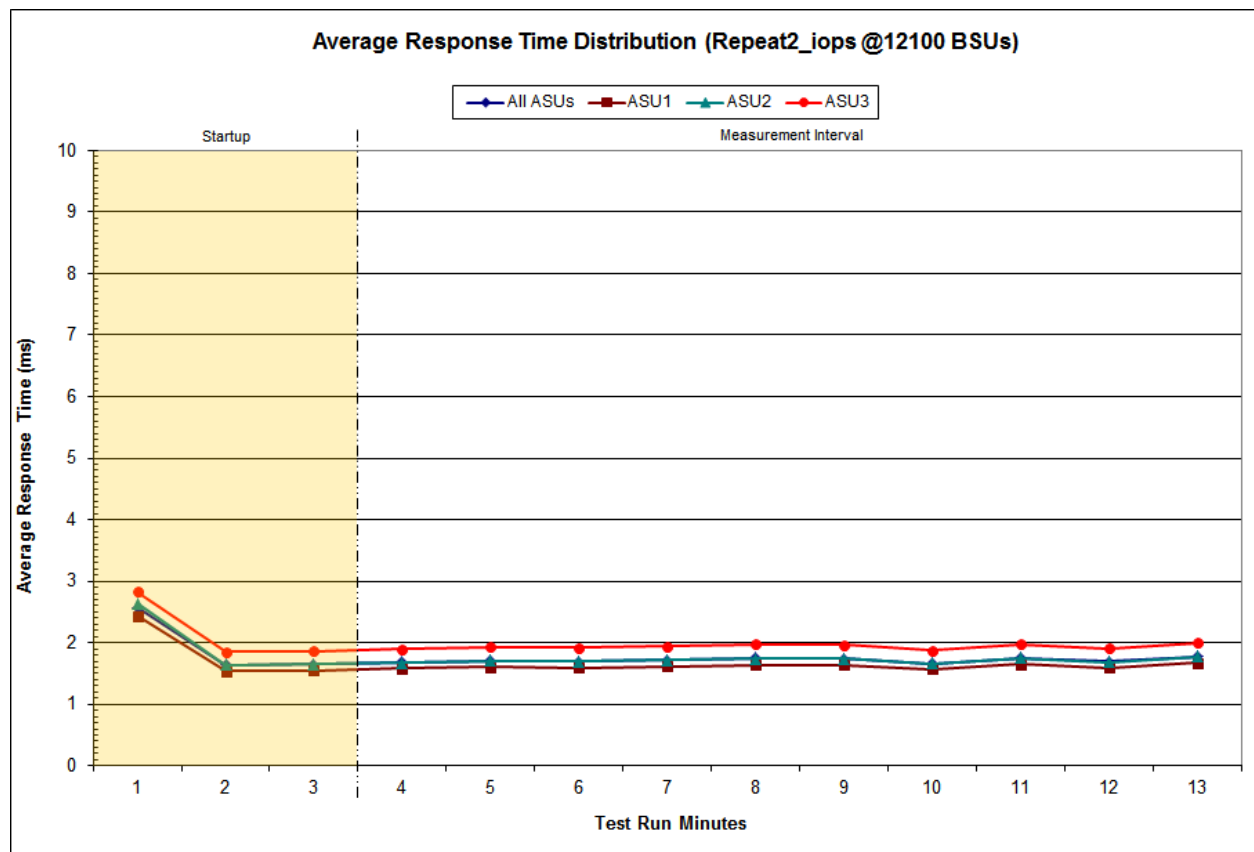

Repeatability 1 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

IM – Intensity Multiplier: The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 5.1.10 and 5.3.15.2

MIM – Measured Intensity Multiplier: The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1). This value may differ from the corresponding Expected Intensity Multiplier by no more than 5%.

Clause 5.3.15.3

COV – Coefficient of Variation: This measure of variation for the Measured Intensity Multiplier cannot exceed 0.2.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2101	0.0180	0.0699	0.0351	0.2809
COV	0.002	0.001	0.002	0.001	0.003	0.002	0.003	0.001

Repeatability 1 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.001	0.000	0.001	0.000	0.001	0.001	0.001	0.000

Repeatability 2 (LRT)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
IM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2809	0.0700	0.2100	0.0180	0.0701	0.0350	0.2810
COV	0.003	0.001	0.002	0.001	0.002	0.002	0.003	0.001

Repeatability 2 (IOPS)
Measured Intensity Multiplier and Coefficient of Variation

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<i>IM</i>	<i>0.0350</i>	<i>0.2810</i>	<i>0.0700</i>	<i>0.2100</i>	<i>0.0180</i>	<i>0.0700</i>	<i>0.0350</i>	<i>0.2810</i>
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.001	0.000	0.001	0.000	0.001	0.001	0.001	0.000

Data Persistence Test

Clause 6

The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

The SPC-1 Workload Generator will write 16 block I/O requests at random over the total Addressable Storage Capacity of the TSC for ten (10) minutes at a minimum of 25% of the load used to generate the SPC-1 IOPS™ primary metric. The bit pattern selected to be written to each block as well as the address of the block will be retained in a log file.

The Tested Storage Configuration (TSC) will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.

The SPC-1 Workload Generator will then use the above log file to verify each block written contains the correct bit pattern.

Clause 9.4.3.8

The following content shall appear in this section of the FDR:

1. *A listing or screen image of all input parameters supplied to the Workload Generator.*
2. *For the successful Data Persistence Test Run, a table illustrating key results. The content, appearance, and format of this table are specified in Table 9-12. Information displayed in this table shall be obtained from the Test Run Results File referenced below in #3.*
3. *For the successful Data Persistence Test Run, the human readable Test Run Results file produced by the Workload Generator (may be contained in an appendix).*

SPC-1 Workload Generator Input Parameters

The SPC-1 Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1 Workload Generator Input Parameters](#) on Page [73](#).

Data Persistence Test Results File

A link to each test result file generated from each Data Persistence Test is listed below.

[Persistence 1 Test Results File](#)

[Persistence 2 Test Results File](#)

Data Persistence Test Results

Data Persistence Test Results	
Data Persistence Test Run Number: 1	
Total Number of Logical Blocks Written	966,268,640
Total Number of Logical Blocks Verified	258,177,696
Total Number of Logical Blocks that Failed Verification	0
Time Duration for Writing Test Logical Blocks	10 minutes
Size in bytes of each Logical Block	512
Number of Failed I/O Requests in the process of the Test	0

In some cases the same address was the target of multiple writes, which resulted in more Logical Blocks Written than Logical Blocks Verified. In the case of multiple writes to the same address, the pattern written and verified must be associated with the last write to that address.

PRICED STORAGE CONFIGURATION AVAILABILITY DATE

Clause 9.4.3.9

The committed delivery data for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date for the Priced Storage Configuration must be the date at which all components are committed to be available.

The NEC Storage M710F as documented in this Full Disclosure Report is currently available for customer purchase and shipment.

PRICING INFORMATION

Clause 9.4.3.3.6

The Executive Summary shall contain a pricing spreadsheet as documented in Clause 8.3.1.

Pricing information may be found in the Priced Storage Configuration Pricing section on page [17](#).

TESTED STORAGE CONFIGURATION (TSC) AND PRICED STORAGE CONFIGURATION DIFFERENCES

Clause 9.4.3.3.8

The Executive Summary shall contain a list of all differences between the Tested Storage Configuration (TSC) and the Priced Storage Configuration.

A list of all differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration may be found in the Executive Summary portion of this document on page [17](#).

ANOMALIES OR IRREGULARITIES

Clause 9.4.3.10

The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-1 benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in this FDR.

There were no anomalies or irregularities encountered during the SPC-1 Remote Audit of the NEC Storage M710F.

APPENDIX A: SPC-1 GLOSSARY

“Decimal” (*powers of ten*) Measurement Units

In the storage industry, the terms “kilo”, “mega”, “giga”, “tera”, “peta”, and “exa” are commonly used prefixes for computing performance and capacity. For the purposes of the SPC workload definitions, all of the following terms are defined in “powers of ten” measurement units.

A kilobyte (KB) is equal to 1,000 (10^3) bytes.

A megabyte (MB) is equal to 1,000,000 (10^6) bytes.

A gigabyte (GB) is equal to 1,000,000,000 (10^9) bytes.

A terabyte (TB) is equal to 1,000,000,000,000 (10^{12}) bytes.

A petabyte (PB) is equal to 1,000,000,000,000,000 (10^{15}) bytes

An exabyte (EB) is equal to 1,000,000,000,000,000,000 (10^{18}) bytes

“Binary” (*powers of two*) Measurement Units

The sizes reported by many operating system components use “powers of two” measurement units rather than “power of ten” units. The following standardized definitions and terms are also valid and may be used in this document.

A kibibyte (KiB) is equal to 1,024 (2^{10}) bytes.

A mebibyte (MiB) is equal to 1,048,576 (2^{20}) bytes.

A gibibyte (GiB) is equal to 1,073,741,824 (2^{30}) bytes.

A tebibyte (TiB) is equal to 1,099,511,627,776 (2^{40}) bytes.

A pebibyte (PiB) is equal to 1,125,899,906,842,624 (2^{50}) bytes.

An exbibyte (EiB) is equal to 1,152,921,504,606,846,967 (2^{60}) bytes.

SPC-1 Data Repository Definitions

Total ASU Capacity: The total storage capacity read and written in the course of executing the SPC-1 benchmark.

Application Storage Unit (ASU): The logical interface between the storage and SPC-1 Workload Generator. The three ASUs (Data, User, and Log) are typically implemented on one or more Logical Volume.

Logical Volume: The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-1 benchmark. Each Logical Volume is implemented as a single, contiguous address space.

Addressable Storage Capacity: The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-1 Workload Generator.

Configured Storage Capacity: This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

Physical Storage Capacity: The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

Data Protection Overhead: The storage capacity required to implement the selected level of data protection.

Required Storage: The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the three ASUs.

Global Storage Overhead: The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

Total Unused Storage: The amount of storage capacity available for use by application programs but not included in the Total ASU Capacity.

SPC-1 Data Protection Levels

Protected 1: The single point of failure of any *storage device* in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.

Protected 2: The single point of failure of any *component* in the configuration will not result in permanent loss of access to or integrity of the SPC-1 Data Repository.

SPC-1 Test Execution Definitions

Average Response Time: The sum of the Response Times for all Measured I/O Requests divided by the total number of Measured I/O Requests.

Completed I/O Request: An I/O Request with a Start Time and a Completion Time (see “I/O Completion Types” below).

Completion Time: The time recorded by the Workload Generator when an I/O Request is satisfied by the TSC as signaled by System Software.

Data Rate: The data transferred in all Measured I/O Requests in an SPC-1 Test Run divided by the length of the Test Run in seconds.

Expected I/O Count: For any given I/O Stream and Test Phase, the product of 50 times the BSU level, the duration of the Test Phase in seconds, and the Intensity Multiplier for that I/O Stream.

Failed I/O Request: Any I/O Request issued by the Workload Generator that could not be completed or was signaled as failed by System Software. A Failed I/O Request has no Completion Time (see “I/O Completion Types” below).

I/O Request Throughput: The total number of Measured I/O requests in an SPC-1 Test Run divided by the duration of the Measurement Interval in seconds.

In-Flight I/O Request: An I/O Request issued by the I/O Command Generator to the TSC that has a recorded Start Time, but does not complete within the Measurement Interval (see “I/O Completion Types” below).

Measured I/O Request: A Completed I/O Request with a Completion Time occurring within the Measurement Interval (see “I/O Completion Types” below).

Measured Intensity Multiplier: The percentage of all Measured I/O Requests that were issued by a given I/O Stream.

Measurement Interval: The finite and contiguous time period, after the TSC has reached Steady State, when data is collected by a Test Sponsor to generate an SPC-1 test result or support an SPC-1 test result.

Ramp-Up: The time required for the Benchmark Configuration (BC) to produce Steady State throughput after the Workload Generator begins submitting I/O Requests to the TSC for execution.

Ramp-Down: The time required for the BC to complete all I/O Requests issued by the Workload Generator. The Ramp-Down period begins when the Workload Generator ceases to issue new I/O Requests to the TSC.

Response Time: The Response Time of a Measured I/O Request is its Completion Time minus its Start Time.

Start Time: The time recorded by the Workload Generator when an I/O Request is submitted, by the Workload Generator, to the System Software for execution on the Tested Storage Configuration (TSC).

Start-Up: The period that begins after the Workload Generator starts to submit I/O requests to the TSC and ends at the beginning of the Measurement Interval.

Shut-Down: The period between the end of the Measurement Interval and the time when all I/O Requests issued by the Workload Generator have completed or failed.


Steady State: The consistent and sustainable throughput of the TSC. During this period the load presented to the TSC by the Workload Generator is constant.

Test: A collection of Test Phases and or Test Runs sharing a common objective.


Test Run: The execution of SPC-1 for the purpose of producing or supporting an SPC-1 test result. SPC-1 Test Runs may have a finite and measured Ramp-Up period, Start-Up period, Shut-Down period, and Ramp-Down period as illustrated in the “SPC-1 Test Run Components” below. All SPC-1 Test Runs shall have a Steady State period and a Measurement Interval.

Test Phase: A collection of one or more SPC-1 Test Runs sharing a common objective and intended to be run in a specific sequence.

I/O Completion Types

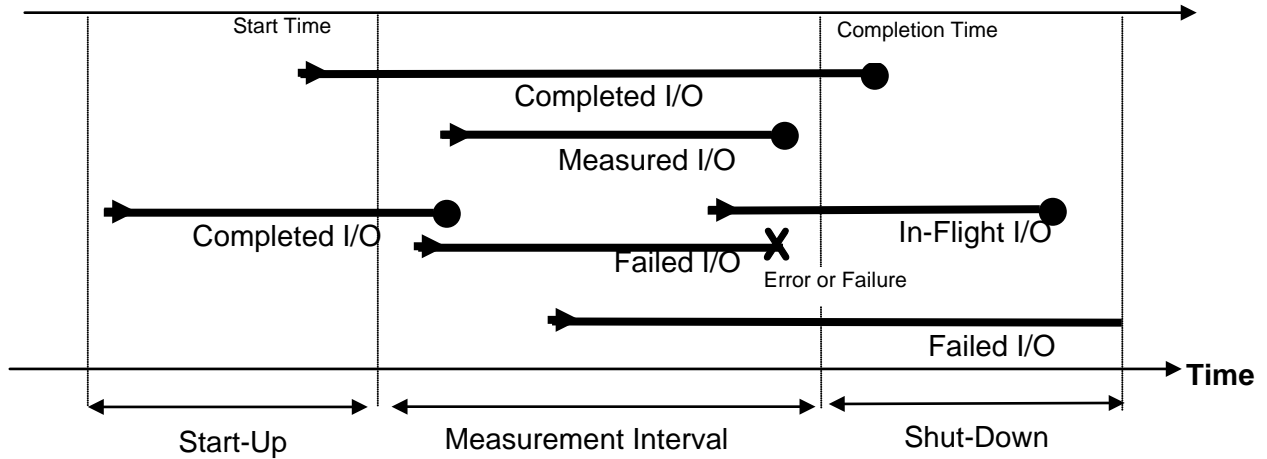

SPC-1 Test Run Components

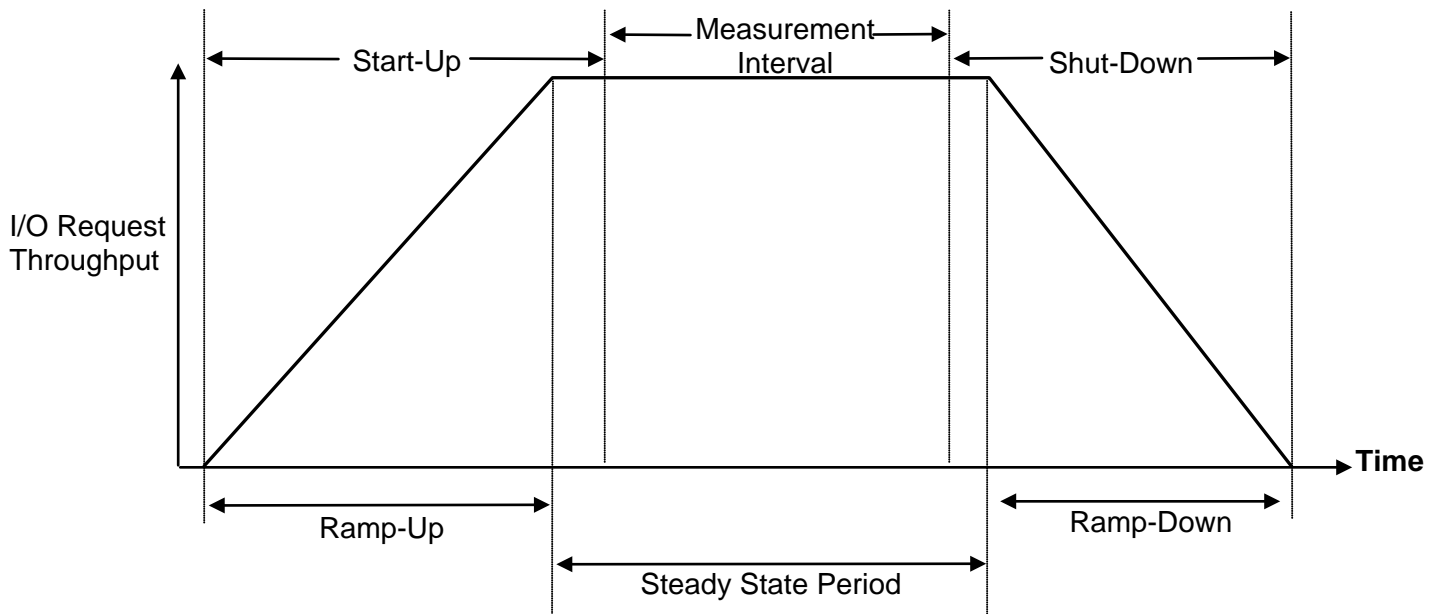

APPENDIX B: CUSTOMER TUNABLE PARAMETERS AND OPTIONS

There were no customer tunable parameters or options changed from their default values for the benchmark measurements.

APPENDIX C: TESTED STORAGE CONFIGURATION (TSC) CREATION

A CLI session is started with the NEC Storage M710F, via one of the Host Systems, using telnet to enter the commands described below.

Telnet Login and Enter Maintenance Mode

Start a telnet client on one of the Host System and specify the IP address of the NEC Storage M710F (*10.1.0.11 is the default value*).

Enter **sysadmin** as the username at the first prompt and **sys123** (*default value*) at the second prompt to logon to the NEC Storage M710F.

The following command will place the NEC Storage M710F into maintenance mode:

```
iSMcfg setseize -mode on
```

Create Volume Group (Pools)

The following commands will create 8 RAID-1 volume groups (pools), using 12 SSDs for each volume group:

```
iSMcfg poolbind -type dynamic -poolnumber 0000h -poolname Pool0000 -raid 1 -  
pdg 00h -pdn 0000h-000bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0001h -poolname Pool0001 -raid 1 -  
pdg 00h -pdn 0800h-080bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0002h -poolname Pool0002 -raid 1 -  
pdg 00h -pdn 1000h-100bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0003h -poolname Pool0003 -raid 1 -  
pdg 00h -pdn 1800h-180bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0004h -poolname Pool0004 -raid 1 -  
pdg 00h -pdn 2000h-200bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0005h -poolname Pool0005 -raid 1 -  
pdg 00h -pdn 2800h-280bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0006h -poolname Pool0006 -raid 1 -  
pdg 00h -pdn 3000h-300bh -time 0  
  
iSMcfg poolbind -type dynamic -poolnumber 0007h -poolname Pool0007 -raid 1 -  
pdg 00h -pdn 3800h-380bh -time 0
```

Create Logical Disks

The following commands will create 32 logical disks, 4 logical disks per volume group (pool):

```
iSMcfg ldbind -poolnumber 0000h -ldn 0000h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0000h -ldn 0001h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0000h -ldn 0002h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0000h -ldn 0003h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0001h -ldn 0004h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0001h -ldn 0005h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0001h -ldn 0006h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0001h -ldn 0007h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0002h -ldn 0008h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0002h -ldn 0009h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0002h -ldn 000ah -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0002h -ldn 000bh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0003h -ldn 000ch -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0003h -ldn 000dh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0003h -ldn 000eh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0003h -ldn 000fh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0004h -ldn 0010h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0004h -ldn 0011h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0004h -ldn 0012h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0004h -ldn 0013h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0005h -ldn 0014h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0005h -ldn 0015h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0005h -ldn 0016h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0005h -ldn 0017h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0006h -ldn 0018h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0006h -ldn 0019h -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0006h -ldn 001ah -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0006h -ldn 001bh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0007h -ldn 001ch -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0007h -ldn 001dh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0007h -ldn 001eh -capacity 500 -unit gb -time 0
iSMcfg ldbind -poolnumber 0007h -ldn 001fh -capacity 500 -unit gb -time 0
```

Exit Maintenance Mode and Telnet Logoff

The following command will exit maintenance mode:

```
iSMcfg setseize -mode off -force
```

The telnet session is terminated with the **exit** command.

SPC-1 Logical Volume Creation

The following steps are executed on a single Host System, using the Windows Disk Management utility, to create the SPC-1 Logical Volumes.

- a) Start the Windows Disk Management utility and confirm that the 32 logical disks are presented as 32 Windows “Disks”.
- b) Initialize and convert all 32 Windows “Disks” to GPT Disks.
- c) Convert all 30 Windows “Disks” to Dynamic Disks.
- d) Create a Windows striped (RAID-0) volume for ASU-1 as follows:
 - i. Select 32 Windows “Disks”.
 - ii. Set the capacity of each stripe to 230,341 MB
 - iii. Assign drive letter “E” to the volume.
 - iv. Do not format the volume.
- e) Create a Windows striped (RAID-0) volume for ASU-2 as follows:
 - i. Select 32 Windows “Disks”.
 - ii. Set the capacity of each stripe to 230,341 MB
 - iii. Assign drive letter “F” to the volume.
 - iv. Do not format the volume.
- f) Create a Windows striped (RAID-0) volume for ASU-3 as follows:
 - i. Select 32 Windows “Disks”.
 - ii. Set the capacity of each stripe to 51,187 MB
 - iii. Assign drive letter “G” to the volume.
 - iv. Do not format the volume.
- g) Reboot all of the Host Systems.
- h) After the reboot completes, start the Windows Disk Management utility on each of the Host Systems.
- i) On each Host System, select either the import foreign disk or reactivate Windows stripe sets option, as necessary, then assign drive letters to the stripe sets as were defined in steps ‘d’ – ‘f’ above.

Note: The values listed above as MB represent 1,048,576 bytes (MiB) per unit rather than 1,000,000 bytes.

APPENDIX D: SPC-1 WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETERS

ASU Pre-Fill

```
compratio=1

sd=default,threads=8

sd=sd1,lun=\\.e:,size=7728961421312
sd=sd2,lun=\\.f:,size=7728961421312
sd=sd3,lun=\\.g:,size=1717550710784

wd=default,rdpct=0,seek=-1,xfersize=1048576
wd=wd1,sd=sd1
wd=wd2,sd=sd2
wd=wd3,sd=sd3
rd=PREPSSD,wd=wd*,iorate=max,elapsed=999990,interval=10
```

Primary Metrics and Repeatability Tests

The content of SPC-1 Workload Generator command and parameter file used in this benchmark to execute the Primary Metrics (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*) and Repeatability (*Repeatability Test Phase 1 and Repeatability Test Phase 2*) Tests is listed below.

```
* spc1_metrics.cfg

host=master

# ns59/60/61/62/66 6slaves, ns63/64/65 7slaves = 126 slave
slaves=(ns59_1,ns59_2,ns59_3,ns59_4,ns59_5,ns59_6,ns59_7,ns59_8,ns59_9,ns59_10,ns60_1,ns60_2,ns60_3,ns60_4,ns60_5,ns60_6,ns60_7,ns60_8,ns60_9,ns60_10,ns61_1,ns61_2,ns61_3,ns61_4,ns61_5,ns61_6,ns61_7,ns61_8,ns61_9,ns61_10,ns62_1,ns62_2,ns62_3,ns62_4,ns62_5,ns62_6,ns62_7,ns62_8,ns62_9,ns62_10,ns63_1,ns63_2,ns63_3,ns63_4,ns63_5,ns63_6,ns63_7,ns63_8,ns63_9,ns63_10,ns64_1,ns64_2,ns64_3,ns64_4,ns64_5,ns64_6,ns64_7,ns64_8,ns64_9,ns64_10,ns65_1,ns65_2,ns65_3,ns65_4,ns65_5,ns65_6,ns65_7,ns65_8,ns65_9,ns65_10,ns66_1,ns66_2,ns66_3,ns66_4,ns66_5,ns66_6,ns66_7,ns66_8,ns66_9,ns66_10,ns72_1,ns72_2,ns72_3,ns72_4,ns72_5,ns72_6,ns72_7,ns72_8,ns72_9,ns72_10,ns73_1,ns73_2,ns73_3,ns73_4,ns73_5,ns73_6,ns73_7,ns73_8,ns73_9,ns73_10,ns74_1,ns74_2,ns74_3,ns74_4,ns74_5,ns74_6,ns74_7,ns74_8,ns74_9,ns74_10,ns75_1,ns75_2,ns75_3,ns75_4,ns75_5,ns75_6,ns75_7,ns75_8,ns75_9,ns75_10,ns75_11)

sd=asu1_1,lun=\\.e:,size=7728961421312
sd=asu2_1,lun=\\.f:,size=7728961421312
sd=asu3_1,lun=\\.g:,size=1717550710784
```

SPC-1 Persistence Test

The content of SPC-1 Workload Generator command and parameter file, used in this benchmark to execute the SPC-1 Persistence Test, is listed below.

```
* spc1_persist.cfg

sd=asu1_1,lun=\\.e:,size=7728961421312
sd=asu2_1,lun=\\.f:,size=7728961421312
sd=asu3_1,lun=\\.g:,size=1717550710784
```

Slave JVMs

The Slave JVM command and parameter files are documented in the [Slave JVMs](#) section of [Appendix E: SPC-1 Workload Generator Input Parameters](#).

APPENDIX E: SPC-1 WORKLOAD GENERATOR INPUT PARAMETERS

There were 121 Slave JVMs used in the Primary Metrics and Repeatability Tests. Those Slave JVMs were started as the first step in the execution sequence. The [Slave JVMs](#) section below documents that step.

The following script, [master script 1 M710f.bat](#), was then executed to invoke the following in an uninterrupted execution sequence:

- Generate the first set of detailed storage configuration information required for a remote audit,
- The ASU pre-fill script, [prepsd.bat](#).
- The commands to execute the Primary Metrics Test (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*), Repeatability Test (*Repeatability Test Phase 1 and Repeatability Test Phase 2*), and SPC-1 Persistence Test Run 1 (*write phase*).
- A script, [shutdown.bat](#), to power off the TSC.

The following script, [master script 2 M710f.bat](#), was executed after the required TSC power off/power on cycle to execute the SPC-1 Persistence Test Run 2 (*read phase*) and generate the second set of detailed storage configuration information required for a remote audit.

Slave JVMs

There were 121 Slave JVMs used in the Primary Metrics and Repeatability Tests. The script, [start_slave_10.bat](#), listed below, illustrates the commands to start the 10 Slave JVMs (**ns59_s1 – ns59_s10**) that executed on the first Host System (**ns59**).

start_slave_10.bat

```
start java -Xmx1024m -Xms1024m spc1 -fns59_s1.parm -ons59_s1
start java -Xmx1024m -Xms1024m spc1 -fns59_s2.parm -ons59_s2
start java -Xmx1024m -Xms1024m spc1 -fns59_s3.parm -ons59_s3
start java -Xmx1024m -Xms1024m spc1 -fns59_s4.parm -ons59_s4
start java -Xmx1024m -Xms1024m spc1 -fns59_s5.parm -ons59_s5
start java -Xmx1024m -Xms1024m spc1 -fns59_s6.parm -ons59_s6
start java -Xmx1024m -Xms1024m spc1 -fns59_s7.parm -ons59_s7
start java -Xmx1024m -Xms1024m spc1 -fns59_s8.parm -ons59_s8
start java -Xmx1024m -Xms1024m spc1 -fns59_s9.parm -ons59_s9
start java -Xmx1024m -Xms1024m spc1 -fns59_s10.parm -ons59_s10
```

The following scripts were used to start the remaining 111 Slave JVMs on the remaining 11 Host Systems (**ns60 – ns75**):

- **ns60: start_slave_10.bat**
- **ns61: start_slave_10.bat**
- **ns62: start_slave_10.bat**
- **ns63: start_slave_10.bat**
- **ns64: start_slave_10.bat**
- **ns65: start_slave_10.bat**

- **ns66: start_slave_10.bat**
- **ns72: start_slave_10.bat**
- **ns73: start_slave_10.bat**
- **ns74: start_slave_10.bat**
- **ns75: start_slave_11.bat**

The file, listed below, is the configuration file for the first Slave JVM (**ns59_s1**).

ns59_s1.parm

```
host=ns59_1
master=192.168.10.161

sd=asu1_1,lun=\\.e:
sd=asu2_1,lun=\\.f:
sd=asu3_1,lun=\\.g:
```

The following sets of configuration files were used for the remaining 111 Slave JVMs. The only difference in those configuration files is the **host= parameter** value, which specifies the appropriate Slave JVM (**ns59_s2...ns74_s11**).

- **ns59_s2.parm – ns59_s10.parm**
- **ns60_s1.parm – ns60_s10.parm**
- **ns61_s1.parm – ns61_s10.parm**
- **ns62_s1.parm – ns62_s10.parm**
- **ns63_s1.parm – ns63_s10.parm**
- **ns64_s1.parm – ns64_s10.parm**
- **ns65_s1.parm – ns65_s10.parm**
- **ns66_s1.parm – ns66_s10.parm**
- **ns72_s1.parm – ns72_s10.parm**
- **ns73_s1.parm – ns73_s10.parm**
- **ns74_s1.parm – ns74_s10.parm**
- **ns75_s1.parm – ns75_s11.parm**

master_script_M710f.bat

```
call profile.bat
call prepssd.bat

copy /y spc1_metrics.cfg spc1.cfg
java metrics -b 12100 -t 28800
java repeat1 -b 12100
java repeat2 -b 12100

copy /y spc1_persist.cfg spc1.cfg
java persist1 -b 12100

call shutdown.bat
```

ASU Pre-Fill

The following script was invoked to execute the required ASU pre-fill using the command and parameter file documented in [Appendix D: SPC-1 Workload Generator Storage Commands and Parameters](#) on page 71.

prepssd.bat

```
c:\spc\vdbench503rc11\vdbenchJRE32 -f c:\spc\prepssd.txt -o c:\spc\ssdprep
```

TSC Power Off

The following script and command file were used to execute the required TSC power off after completion of SPC-1 Persistence Test Run 1.

shutdown.bat

```
c:\spc\teraterm\ttermpro.exe /M=c:\spc\teraterm\M710F_shutdown.ttl
```

M710F_shutdown.ttl

```
;; connection user/password
HOSTADDR = '192.168.70.238'
USERNAME = 'sysadmin'
PASSWORD = 'sys123'
;=====
;; config
COMMAND = HOSTADDR
strconcat COMMAND ':23 /nossh /T=1'
;; connect
connect COMMAND
;; login
wait 'login: '
sendln USERNAME
wait 'Password: '
sendln PASSWORD

;; command1
wait 'sysadmin@M710_2-0# '
sendln 'iSMenv gettime'

;; command2
wait 'sysadmin@M710_2-0# '
sendln 'iSMview -all'

;; command3
wait 'sysadmin@M710_2-0# '
sendln 'iSMcfg shutdown -time 5'

;; finish
sendln 'exit'

end
```

SPC-1 Persistence Test Run 2 (*read phase*)

The following script, was executed after the required TSC power off/power on cycle to execute the SPC-1 Persistence Test Run 2 (*read phase*) and generate the second set of detailed storage configuration information required for a remote audit.

master_script_2_M710f.bat

```
java persist2  
call profile.bat
```