



**SPC BENCHMARK 1C™  
FULL DISCLOSURE REPORT**

**SEAGATE TECHNOLOGY LLC  
SEAGATE 600GB 15K  
12GBPS SAS 2.5"  
ENTERPRISE PERFORMANCE  
HDD/ST600MP0065**

**SPC-1C V1.5**

**Submitted for Review: November 3, 2014  
Submission Identifier: C00019**

**First Edition – November 2014**

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by Seagate Technology LLC for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. Seagate Technology LLC may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local Seagate Technology LLC representative for information on products and services available in your area.

© Copyright Seagate Technology LLC 2013. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

**Trademarks**

SPC Benchmark-1C, SPC-1C, SPC-1C IOPS and SPC-1C LRT are trademarks of the Storage Performance Council. Seagate, Seagate Technology, the Wave logo and Seagate Savvio are registered trademarks of Seagate Technology LLC in the United States and other countries. Savvio is either a trademark or registered trademark of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other brands, trademarks, and product names are the property of their respective owners.

## Table of Contents

<b>Audit Certification</b> .....	<b>vii</b>
<b>Audit Certification (<i>cont.</i>)</b> .....	<b>viii</b>
<b>Letter of Good Faith</b> .....	<b>ix</b>
<b>Executive Summary</b> .....	<b>10</b>
<b>Test Sponsor and Contact Information</b> .....	<b>10</b>
<b>Revision Information and Key Dates</b> .....	<b>10</b>
<b>Tested Storage Product (TSP) Description</b> .....	<b>10</b>
<b>Summary of Results</b> .....	<b>11</b>
<b>Storage Capacities, Relationships, and Utilization</b> .....	<b>12</b>
<b>Response Time – Throughput Curve</b> .....	<b>15</b>
<b>Response Time – Throughput Data</b> .....	<b>15</b>
<b>Priced Storage Configuration Pricing</b> .....	<b>16</b>
<b>Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration</b> .....	<b>16</b>
<b>Benchmark Configuration/Tested Storage Configuration Diagram</b> .....	<b>17</b>
<b>Host System and Tested Storage Configuration Components</b> .....	<b>17</b>
<b>Configuration Information</b> .....	<b>18</b>
<b>Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram</b> .....	<b>18</b>
<b>Host System(s) and Tested Storage Configuration (TSC) Table of Components</b> .....	<b>18</b>
<b>Customer Tunable Parameters and Options</b> .....	<b>18</b>
<b>Tested Storage Configuration (TSC) Description</b> .....	<b>19</b>
<b>SPC-1C Workload Generator Storage Configuration</b> .....	<b>19</b>
<b>ASU Pre-Fill</b> .....	<b>19</b>
<b>SPC-1C Data Repository</b> .....	<b>20</b>
<b>Storage Capacities and Relationships</b> .....	<b>20</b>
SPC-1C Storage Capacities .....	<b>20</b>
SPC-1C Storage Hierarchy Ratios .....	<b>21</b>
SPC-1C Storage Capacity Charts.....	<b>21</b>
<b>Storage Capacity Utilization</b> .....	<b>23</b>
<b>Logical Volume Capacity and ASU Mapping</b> .....	<b>24</b>
<b>SPC-1C Benchmark Execution Results</b> .....	<b>25</b>
<b>SPC-1C Tests, Test Phases, and Test Runs</b> .....	<b>25</b>
<b>“Ramp-Up” Test Runs</b> .....	<b>26</b>
<b>Primary Metrics Test – Sustainability Test Phase</b> .....	<b>26</b>
SPC-1C Workload Generator Input Parameters.....	<b>27</b>

Sustainability Test Results File .....	27
Sustainability – Data Rate Distribution Data (MB/second) .....	27
Sustainability – Data Rate Distribution Graph .....	27
Sustainability – I/O Request Throughput Distribution Data .....	28
Sustainability – I/O Request Throughput Distribution Graph .....	28
Sustainability – Average Response Time (ms) Distribution Data .....	29
Sustainability – Average Response Time (ms) Distribution Graph .....	29
Sustainability – Response Time Frequency Distribution Data .....	30
Sustainability – Response Time Frequency Distribution Graph .....	30
Sustainability – Measured Intensity Multiplier and Coefficient of Variation.....	31
<b>Primary Metrics Test – IOPS Test Phase.....</b>	<b>32</b>
SPC-1C Workload Generator Input Parameters.....	32
IOPS Test Results File.....	32
IOPS Test Run – I/O Request Throughput Distribution Data .....	33
IOPS Test Run – I/O Request Throughput Distribution Graph.....	33
IOPS Test Run – Average Response Time (ms) Distribution Data .....	34
IOPS Test Run – Average Response Time (ms) Distribution Graph .....	34
IOPS Test Run –Response Time Frequency Distribution Data .....	35
IOPS Test Run –Response Time Frequency Distribution Graph.....	35
IOPS Test Run – I/O Request Information.....	36
IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation.....	36
<b>Primary Metrics Test – Response Time Ramp Test Phase .....</b>	<b>37</b>
SPC-1C Workload Generator Input Parameters.....	37
Response Time Ramp Test Results File.....	37
Response Time Ramp Distribution (IOPS) Data.....	38
Response Time Ramp Distribution (IOPS) Data ( <i>continued</i> ) .....	39
Response Time Ramp Distribution (IOPS) Graph .....	39
SPC-1C LRT™ Average Response Time (ms) Distribution Data .....	40
SPC-1C LRT™ Average Response Time (ms) Distribution Graph.....	40
SPC-1C LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation....	41
<b>Repeatability Test .....</b>	<b>42</b>
SPC-1C Workload Generator Input Parameters.....	42
Repeatability Test Results File .....	43
Repeatability 1 LRT – I/O Request Throughput Distribution Data.....	44
Repeatability 1 LRT – I/O Request Throughput Distribution Graph .....	44
Repeatability 1 LRT –Average Response Time (ms) Distribution Data .....	45
Repeatability 1 LRT –Average Response Time (ms) Distribution Graph.....	45
Repeatability 1 IOPS – I/O Request Throughput Distribution Data .....	46
Repeatability 1 IOPS – I/O Request Throughput Distribution Graph.....	46

Repeatability 1 IOPS –Average Response Time (ms) Distribution Data .....	47
Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph .....	47
Repeatability 2 LRT – I/O Request Throughput Distribution Data.....	48
Repeatability 2 LRT – I/O Request Throughput Distribution Graph .....	48
Repeatability 2 LRT –Average Response Time (ms) Distribution Data .....	49
Repeatability 2 LRT –Average Response Time (ms) Distribution Graph.....	49
Repeatability 2 IOPS – I/O Request Throughput Distribution Data .....	50
Repeatability 2 IOPS – I/O Request Throughput Distribution Graph.....	50
Repeatability 2 IOPS –Average Response Time (ms) Distribution Data.....	51
Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph .....	51
Repeatability 1 (LRT) Measured Intensity Multiplier and Coefficient of Variation .....	52
Repeatability 1 (IOPS) Measured Intensity Multiplier and Coefficient of Variation .....	52
Repeatability 2 (LRT) Measured Intensity Multiplier and Coefficient of Variation .....	52
Repeatability 2 (IOPS) Measured Intensity Multiplier and Coefficient of Variation .....	53
<b>Data Persistence Test.....</b>	<b>54</b>
SPC-1C Workload Generator Input Parameters.....	54
Data Persistence Test Results File .....	54
Data Persistence Test Results.....	55
<b>Priced Storage Configuration Availability Date.....</b>	<b>56</b>
<b>Pricing Information.....</b>	<b>56</b>
<b>Tested Storage Configuration (TSC) and Priced Storage Configuration Differences.....</b>	<b>56</b>
<b>Anomalies or Irregularities .....</b>	<b>56</b>
<b>Appendix A: SPC-1C Glossary .....</b>	<b>57</b>
“Decimal” ( <i>powers of ten</i> ) Measurement Units.....	57
“Binary” ( <i>powers of two</i> ) Measurement Units.....	57
SPC-1C Data Repository Definitions .....	57
SPC-1C Data Protection Levels.....	58
SPC-1C Test Execution Definitions.....	58
I/O Completion Types .....	60
SPC-1C Test Run Components .....	60
<b>Appendix B: Customer Tunable Parameters and Options.....</b>	<b>61</b>
<b>Appendix C: Tested Storage Configuration (TSC) Creation .....</b>	<b>62</b>
<b>Create RAID-10 Array .....</b>	<b>62</b>
RB.cmd.....	62
<b>Create SPC-1C Logical Volumes .....</b>	<b>62</b>
diskmk.txt.....	62

<b>Change Parameters .....</b>	<b>63</b>
TuneParms.cmd .....	63
<b>Appendix D: SPC-1C Workload Generator Storage Commands and Parameters .....</b>	<b>64</b>
ASU Pre-Fill.....	64
Primary Metrics Test, Repeatability and Persistence Tests.....	64
<b>Appendix E: SPC-1C Workload Generator Input Parameters .....</b>	<b>65</b>
Primary Metrics, Repeatability and Persistence Tests.....	65
<b>Appendix F: Third-Party Quotations.....</b>	<b>66</b>
Storage Enclosure .....	66
LSI MegaRAID Controller .....	67
SAS Cables .....	68

## AUDIT CERTIFICATION



Craig Parris  
Seagate Technology LLC  
1280 Disc Drive  
Shakopee, MN 55379

October 31, 2014

The SPC Benchmark 1C™ results listed below for the Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065 were produced in compliance with the SPC Benchmark 1C™ V1.5 Audit requirements.

SPC Benchmark 1C™ V1.5 Reported Data	
Tested Storage Product (TSP): Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065	
Metric	Reported Result
SPC-1C Submission Identifier	C00019
SPC-1C IOPS™	4,700.46
Total ASU Capacity	7,194.852 GB
Data Protection Level	Protected 1 (Mirroring)
Total Price – Priced Storage Configuration	\$11,995.55
Currency Used	U.S. Dollars
Target Country for availability, sales and support	USA

The following SPC Benchmark 1C™ Audit requirements were reviewed and found compliant with V1.5 of the SPC Benchmark 1C™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified by physical inspection and information supplied by Seagate Technology LLC:
  - ✓ Physical Storage Capacity and requirements.
  - ✓ Configured Storage Capacity and requirements.
  - ✓ Addressable Storage Capacity and requirements.
  - ✓ Capacity of each Logical Volume and requirements.
  - ✓ Capacity of each Application Storage Unit (ASU) and requirements.
- The total Application Storage Unit (ASU) Capacity was filled with random data, using an auditor approved tool, prior to the execution of the SPC-1C Tests.

Storage Performance Council  
643 Bair Island Road, Suite 103  
Redwood City, CA 94062  
[AuditService@storageperformance.org](mailto:AuditService@storageperformance.org)  
650.556.9384

## AUDIT CERTIFICATION (CONT.)

Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065  
SPC-1C Audit Certification

Page 2


- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).
- Listings and commands to configure the Benchmark Configuration/Tested Storage Configuration, including customer tunable parameters that were changed from default values.
- SPC-1C Workload Generator commands and parameters used for the audited SPC-1C Test Runs.
- The following Host System requirements were verified by information supplied by Seagate Technology LLC:
  - ✓ The type of Host System including the number of processors and main memory.
  - ✓ The presence and version number of the SPC-1C Workload Generator on the Host System.
  - ✓ The TSC boundary within the Host System.
- The execution of each Test, Test Phase, and Test Run was observed and found compliant with all of the requirements and constraints of Clauses 4 and 5 of the SPC-1C Benchmark Specification.
- The Test Results Files and resultant Summary Results Files for each of following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 4, 5 and 6 of the SPC-1C Benchmark Specification:
  - ✓ Data Persistence Test
  - ✓ Sustainability Test Phase
  - ✓ IOPS Test Phase
  - ✓ Response Time Ramp Test Phase
  - ✓ Repeatability Test
- There were no differences between the Tested Storage Configuration (TSC) used for the benchmark and Priced Storage Configuration.
- The submitted pricing information met all of the requirements and constraints of Clause 9 of the SPC-1C Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 10 of the SPC-1C Benchmark Specification.
- This successfully audited SPC measurement is not subject to an SPC Confidential Review.

**Audit Notes:**

There were no audit notes or exceptions.

Respectfully,

Walter E. Baker



SPC Auditor

Storage Performance Council  
643 Bair Island Road, Suite 103  
Redwood City, CA 94062  
[AuditService@storageperformance.org](mailto:AuditService@storageperformance.org)  
650.556.9384



## LETTER OF GOOD FAITH



Seagate Technology  
1280 Disc Drive  
Shakopee MN 55379

Date: *October 20<sup>th</sup> 2014*

From: John Morris

To: *Walter Baker*

Subject:

SPC-1C Letter of Good Faith Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD

*Seagate Technology* is the SPC-1C Test Sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1C benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with *V1.5* of the SPC-1C benchmark specification.

In addition, we have reported any items in the Benchmark Configuration and execution of the benchmark necessary to reproduce the reported results even if the items are not explicitly required to be disclosed by the above SPC-1C benchmark specification.

Signed:

Date:

 \_\_\_\_\_ *10/31/14*

John Morris  
Vice President, Enterprise Product Development

Seagate Technology  
1280 Disc Drive  
Shakopee, MN 55379

## EXECUTIVE SUMMARY

### Test Sponsor and Contact Information

Test Sponsor and Contact Information	
<b>Test Sponsor Primary Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Craig Parris – <a href="mailto:craig.parris@seagate.com">craig.parris@seagate.com</a> 1280 Disc Drive Shakopee, MN 55379 Phone: (952) 402-2418
<b>Test Sponsor Alternate Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Barbara Craig – <a href="mailto:barbara.j.craig@seagate.com">barbara.j.craig@seagate.com</a> 1280 Disc Drive Shakopee, MN 55379 Phone: (952) 402-2804
<b>Auditor</b>	Storage Performance Council – <a href="http://www.storageperformance.org">http://www.storageperformance.org</a> Walter E. Baker – <a href="mailto:AuditService@StoragePerformance.org">AuditService@StoragePerformance.org</a> 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

### Revision Information and Key Dates

Revision Information and Key Dates	
<b>SPC-1C Specification revision number</b>	V1.5
<b>SPC-1C Workload Generator revision number</b>	V1.2.0
<b>Date Results were first used publicly</b>	November 3, 2014
<b>Date the FDR was submitted to the SPC</b>	November 3, 2014
<b>Date the Priced Storage Configuration is available for shipment to customers</b>	currently available
<b>Date the TSC completed audit certification</b>	October 31, 2014

### Tested Storage Product (TSP) Description

These drives provide high performance, high capacity data storage for a variety of systems including engineering workstations, network servers, mainframes, and supercomputers. The 12Gb Serial Attached SCSI interface is designed to meet next-generation computing demands for performance, scalability, flexibility and high-density storage requirements. These drives are random access storage devices designed to support the 12Gb Serial Attached SCSI.

## Summary of Results

SPC-1C Reported Data	
Tested Storage Product (TSP) Name: Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065	
Metric	Reported Result
SPC-1C Submission Identifier	C00019
SPC-1C IOPS™	4,700.46
Total ASU Capacity	7,194.852 GB
Data Protection Level	Protected 1 ( <i>Mirroring</i> )
Total Price	\$11,995.55
Pricing Currency	U.S. Dollars
Target Country for availability, sales and support	USA

**SPC-1C Submission Identifier** is the unique identifier assigned to this specific SPC-1C Result.

**SPC-1C IOPS™** represents the maximum I/O Request Throughput at the 100% load point.

**Total ASU (Application Storage Unit) Capacity** represents the total storage capacity available to be read and written in the course of executing the SPC-1C benchmark.

A **Data Protection Level** of **Protected 1** using **Mirroring** configures two or more identical copies of user data.

***Protected 1:** The single point of failure of any **storage device** in the configuration will not result in permanent loss of access to or integrity of the SPC-1C Data Repository.*


**Total Price** includes the cost of the Priced Storage Configuration plus three years of hardware maintenance and software support as detailed on page 16.



**Pricing Currency** is formal name for the currency used in calculating the **Total Price**. That currency may be the local currency of the **Target Country** or the currency of a difference country (*non-local currency*).


The **Target Country** is the country in which the Priced Storage Configuration is available for sale and in which the required hardware maintenance and software support is provided either directly from the Test Sponsor or indirectly via a third-party supplier.

### Storage Capacities, Relationships, and Utilization

The following four charts and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

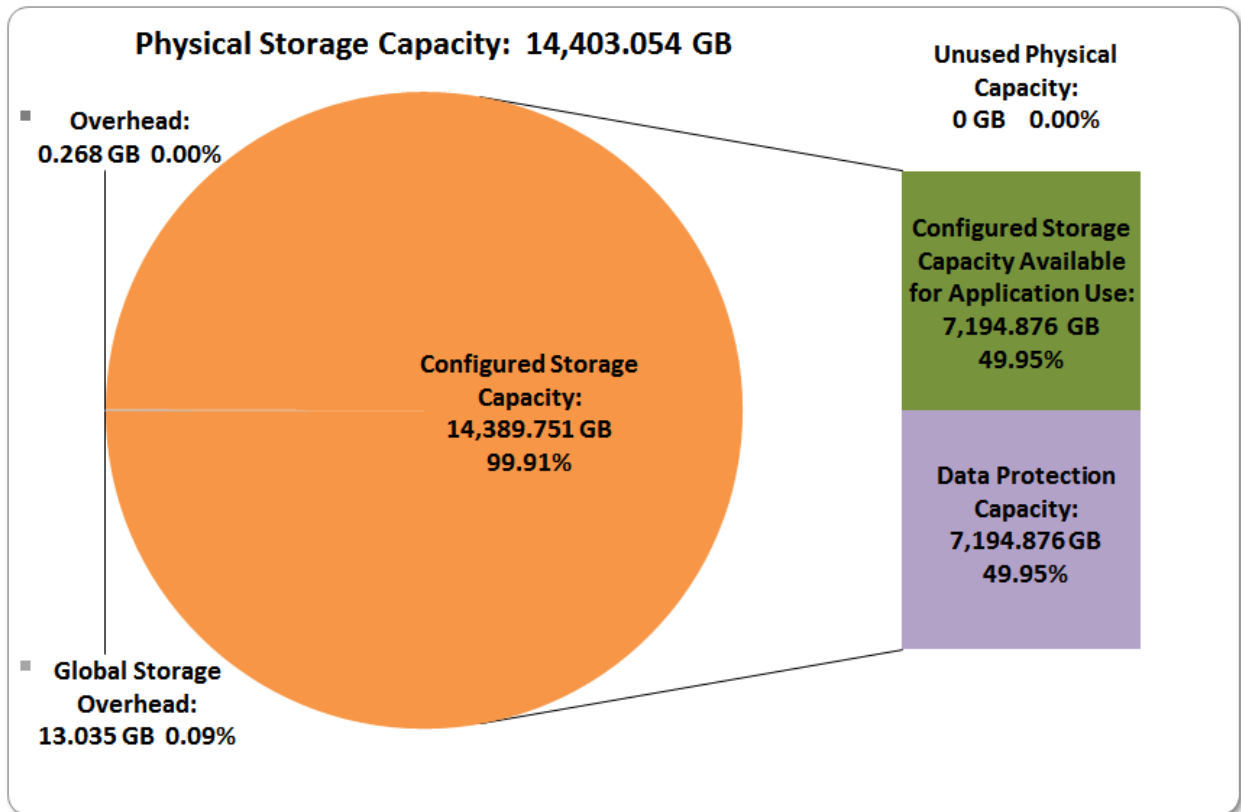

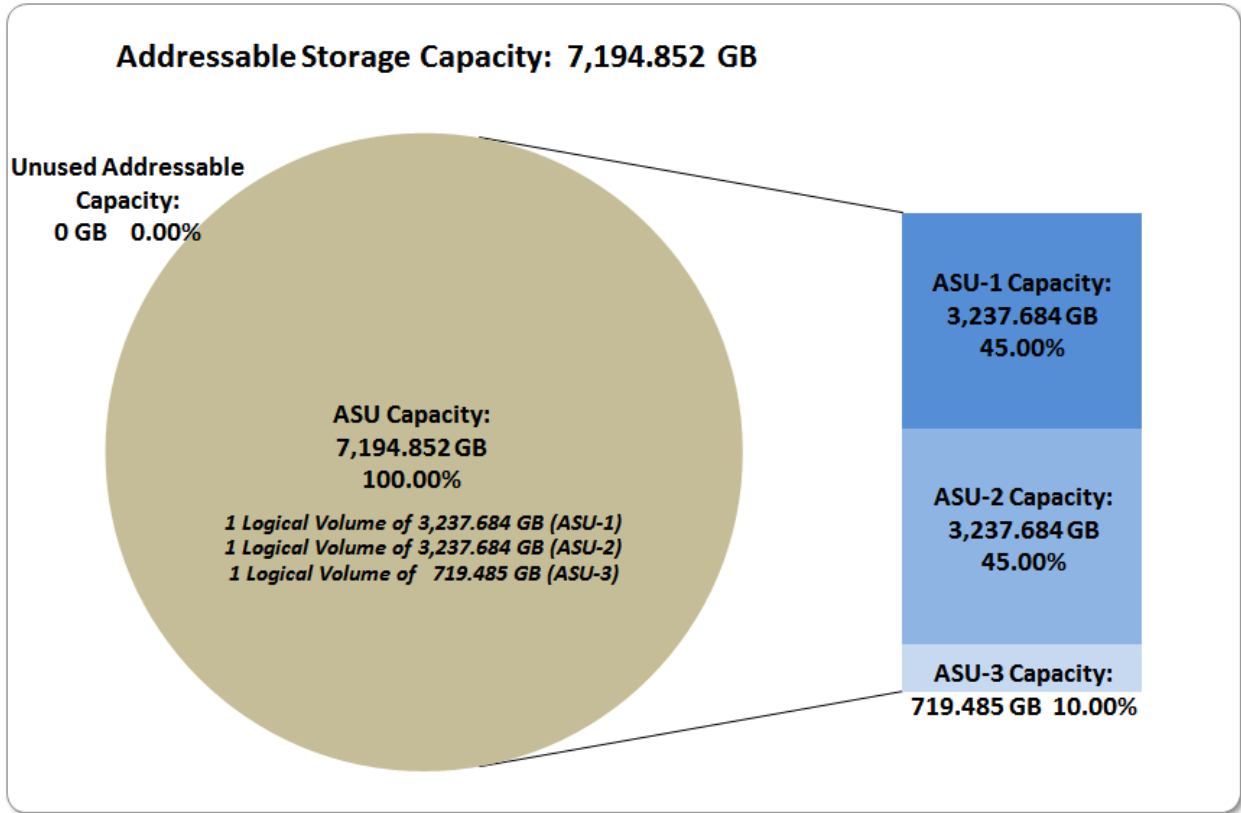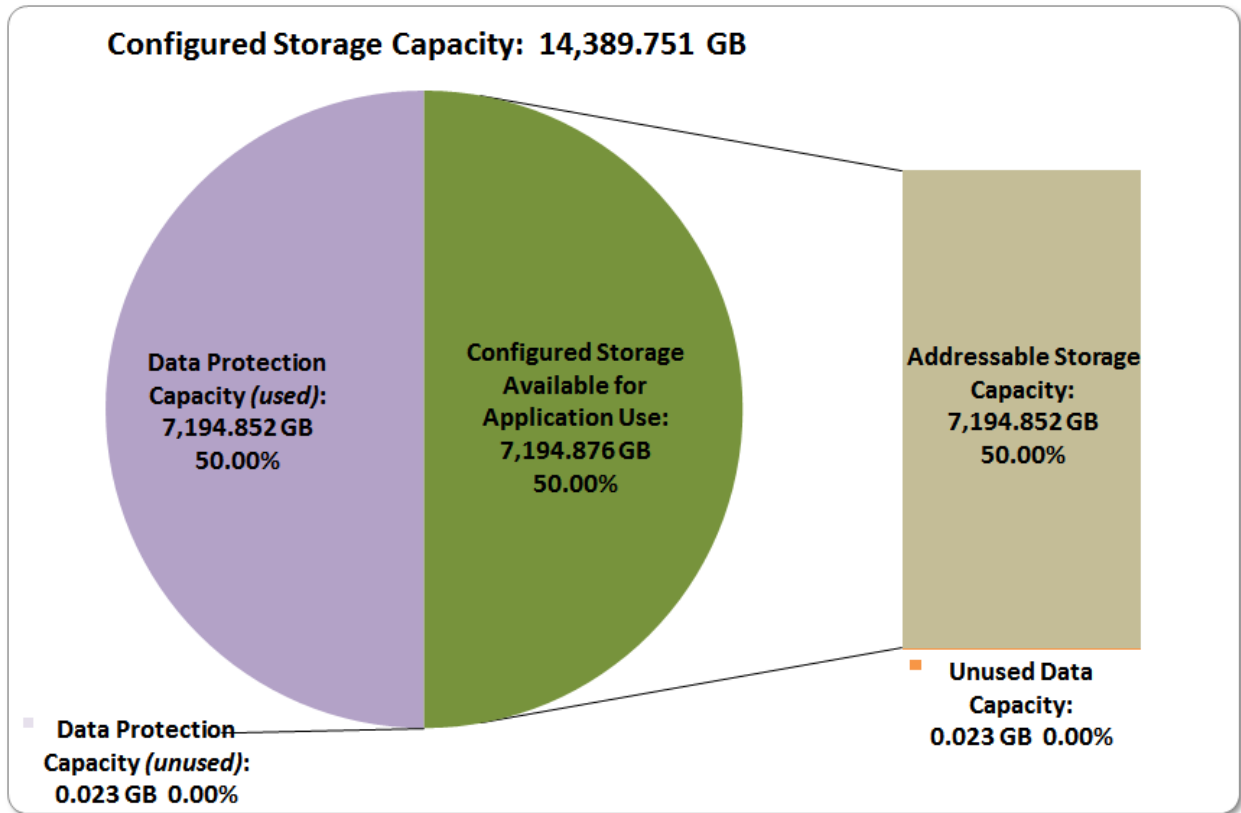

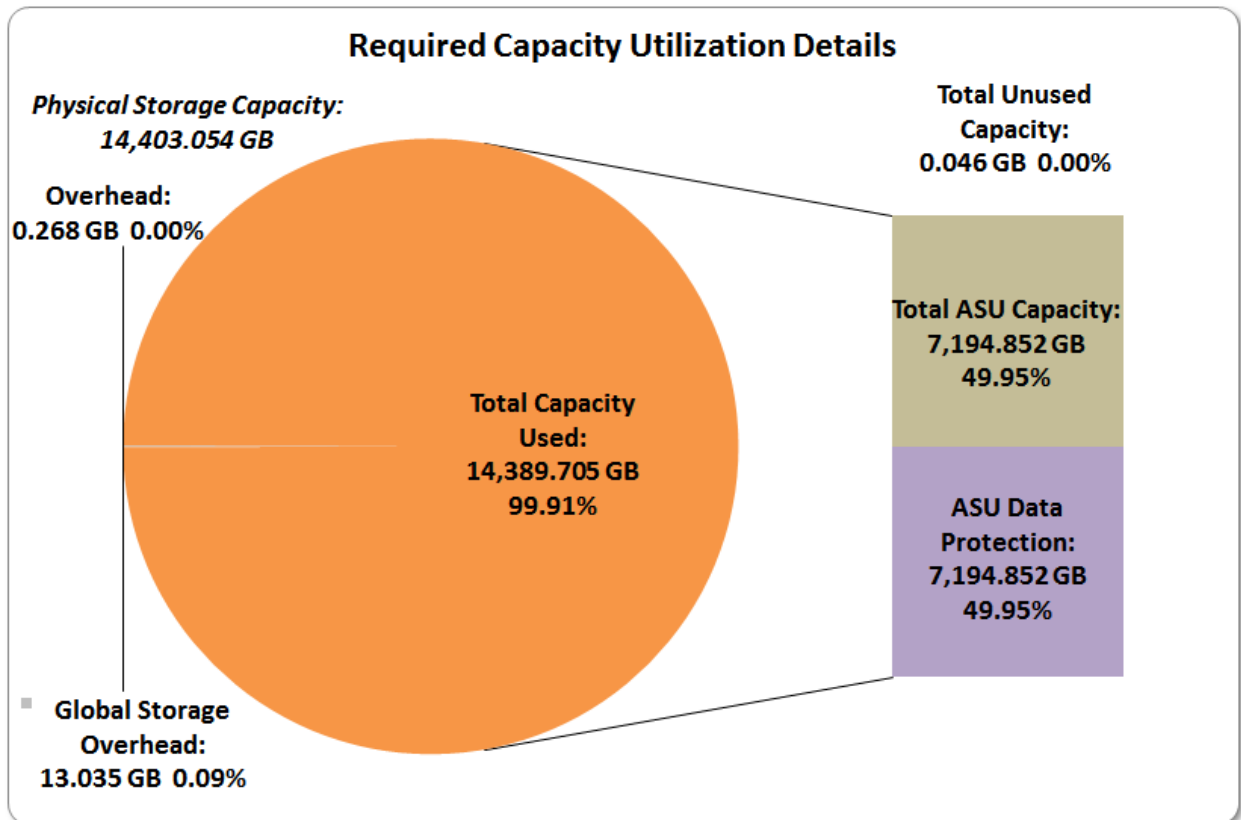

The Tested Storage Configuration (TSC) must be configured so that there is either no more than 1 GB of Unused Storage (100% utilization) or that the sum of Total ASU Capacity and storage required for data protection equals 50% (+-1 GiB) of the Physical Storage Capacity.


The TSC met the “100% utilization” requirement since it did not include any Unused Storage.

Detailed information for the various storage capacities and utilizations is available on pages 20-21.

## Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1C IOPS™ metric.

The Average Response Time measured at any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

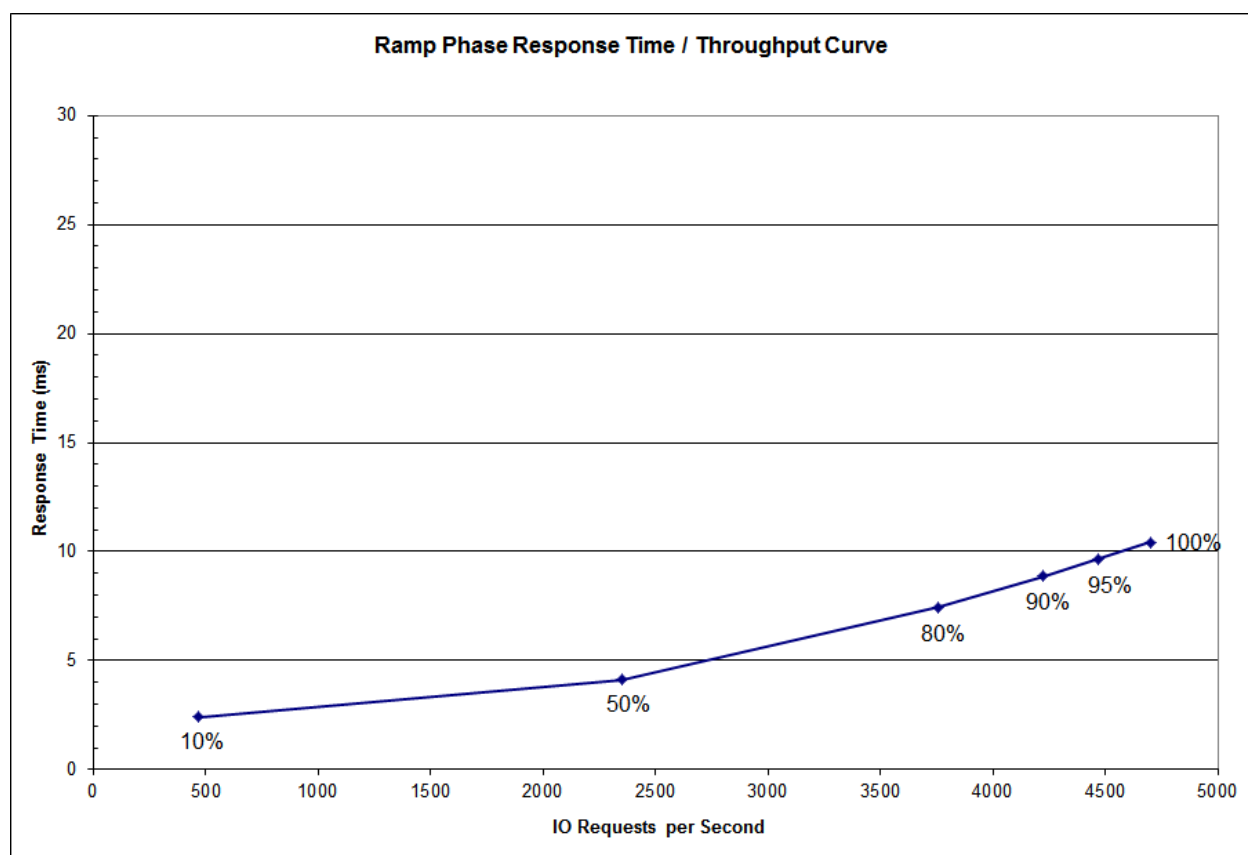

## Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
<b>I/O Request Throughput</b>	469.41	2,349.39	3,759.59	4,223.85	4,469.16	4,700.46
<b>Average Response Time (ms):</b>						
<b>All ASUs</b>	2.41	4.13	7.44	8.86	9.65	10.42
<b>ASU-1</b>	3.27	5.65	10.05	11.85	12.86	13.82
<b>ASU-2</b>	3.11	5.31	10.70	13.35	14.78	16.15
<b>ASU-3</b>	0.30	0.39	0.50	0.56	0.62	0.68
<b>Reads</b>	5.67	9.90	18.13	21.62	23.58	25.44
<b>Writes</b>	0.29	0.38	0.49	0.55	0.59	0.64

### Priced Storage Configuration Pricing

Description	Part Numbers	Qty	Price	Extended Price
600GB SAS 2.5" SSHD	ST600MP00065	24	\$310.00	7,440.00
12Gb SAS RAID Controller	LSI SAS 9361-8i	1	\$592.55	592.55
Storage Enclosure JBOD	DNS-1640D	1	\$3,850.00	3,850.00
SAS 3.0 1M Cable	MiniSAS	2	\$56.50	113.00
			<b>Total</b>	<b>11,995.55</b>


### Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and Priced Storage Configuration.



### Benchmark Configuration/Tested Storage Configuration Diagram

**24 – Seagate ST600MP0065 600GB  
15K 12Gbps SAS 2.5” HDDs**

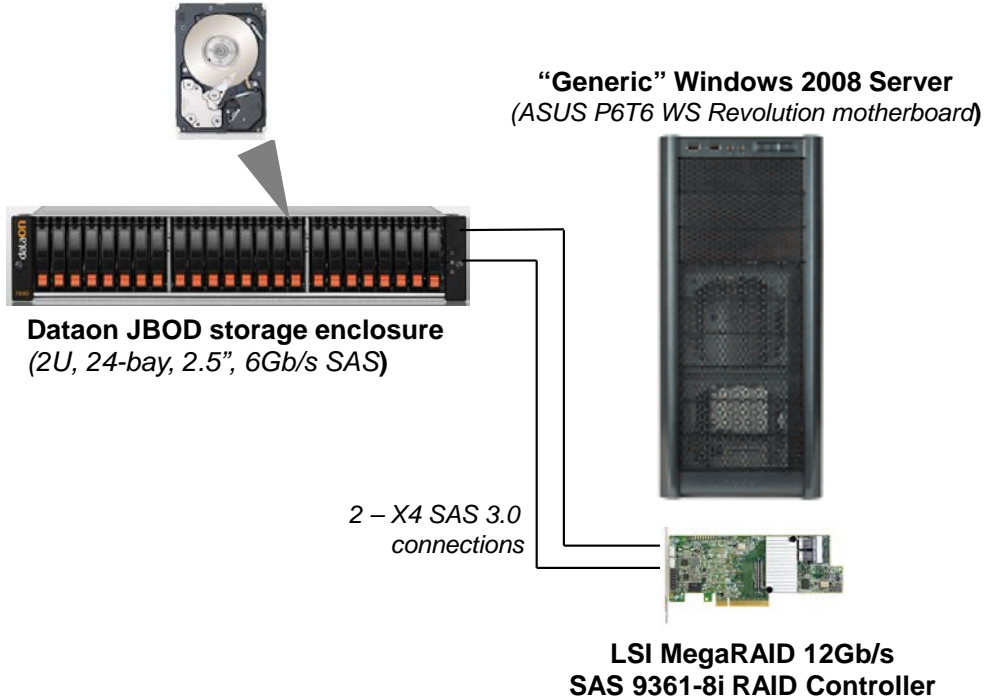

### Host System and Tested Storage Configuration Components

Host System	Tested Storage Configuration (TSC)
"Generic" Windows 2008 Server ASUS P6T6 WS Revolution motherboard 1 – Intel® Xeon® Processor X5570 4 Cores, 2.93 GHz, 8 MB Intel® Smart Cache	1 – LSI MegaRAID 12Gb SAS 9361-8i RAID controller with 1 GB cache
6 GB main memory	1 – PCIe 2.0 x8 front-end connection
Windows Server 2008 R2	2 – 12Gb SAS backend connections (load balance mode) (4 lanes/connection, 2 connections used)
PCIe 2.0	<b>24 – Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065 HDDs</b>
	1 – Dataon DNS-1640 (JBOD) storage enclosure (2U 24-bay 2.5" 6Gb/s SAS)
	2 – SAS 3.0 1m cables

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-1C benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

## **CONFIGURATION INFORMATION**

### **Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram**

#### *Clause 10.4.5.11*

*The Executive Summary will contain a one page BC/TSC diagram that illustrates all major components of the BC/TSC.*

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page [17](#) ([Benchmark Configuration/Tested Storage Configuration Diagram](#)).

### **Host System(s) and Tested Storage Configuration (TSC) Table of Components**

#### *Clause 10.4.5.12*

*The Executive Summary will contain a table that lists the major components of each Host System and the Tested Storage Configuration (TSC).*

The Host System(s) and TSC table of components may be found on page [17](#) ([Host System and Tested Storage Configuration Components](#)).

### **Customer Tunable Parameters and Options**

#### *Clause 10.4.6.1*

*All Benchmark Configuration (BC) components with customer tunable parameters and options that have been altered from their default values must be listed in the Full Disclosure Report (FDR). The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option. If the parameter name is not self-explanatory to a knowledgeable practitioner, a brief description of the parameter's use must also be included in the FDR entry.*

[Appendix B: Customer Tunable Parameters and Options](#) on page [61](#) contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

## Tested Storage Configuration (TSC) Description

### Clause 10.4.6.2

*The Full Disclosure Report must include sufficient information to recreate the logical representation of the Tested Storage Configuration (TSC). In addition to customer tunable parameters and options (Clause 10.4.6.1), that information must include, at a minimum:*

- *A diagram and/or description of the following:*
  - *All physical components that comprise the TSC. Those components are also illustrated in the BC Configuration Diagram in Clause 10.4.5.10.*
  - *The logical representation of the TSC, configured from the above components that will be presented to the SPC-1C Workload Generator.*
- *Listings of scripts used to create the logical representation of the TSC.*
- *If scripts were not used, a description of the process used with sufficient detail to recreate the logical representation of the TSC.*

[Appendix C: Tested Storage Configuration \(TSC\) Creation](#) on page [62](#) contains the detailed information that describes how to create and configure the logical TSC.

## SPC-1C Workload Generator Storage Configuration

### Clause 10.4.6.3

*The Full Disclosure Report will include all SPC-1C Workload Generator storage configuration commands and parameters used in the SPC-1C benchmark measurements.*

The SPC-1C Workload Generator storage configuration commands and parameters for this measurement appear in [Appendix D: SPC-1C Workload Generator Storage Commands and Parameters](#) on page [64](#).

## ASU Pre-Fill

### Clause 6.3.3

*Each of the three SPC-1C ASUs (ASU-1, ASU-2 and ASU-3) is required to be completely filled with specified content prior to the execution of audited SPC-1C Tests. The content is required to consist of random data pattern such as that produced by an SPC recommended tool.*

The configuration file used to complete the required ASU pre-fill appears in [Appendix D: SPC-1C Workload Generator Storage Commands and Parameters](#) on page [64](#).

## **SPC-1C DATA REPOSITORY**

This portion of the Full Disclosure Report presents the detailed information that fully documents the various SPC-1C storage capacities and mappings used in the Tested Storage Configuration. [SPC-1C Data Repository Definitions](#) on page [57](#) contains definitions of terms specific to the SPC-1C Data Repository.

### **Storage Capacities and Relationships**

#### **Clause 10.4.7.1**

*Two tables and four charts documenting the storage capacities and relationships of the SPC-1C Storage Hierarchy (Clause 2.1) shall be included in the FDR. ... The capacity value in each chart may be listed as an integer value, for readability, rather than the decimal value listed in [the table below].*

#### **SPC-1C Storage Capacities**

The Physical Storage Capacity consisted of 14,403.054 GB distributed over 24 disk drives, each with a formatted capacity of 600.127 GB. There was 0.000 GB (0.00%) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 13.035 GB (0.09%) of the Physical Storage Capacity. There was 0.046 GB (0.0003%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 100.00% of the Addressable Storage Capacity resulting in 0.00 GB (0.00%) of Unused Storage within the Addressable Storage Capacity. The Data Protection (*Mirroring*) capacity was 7,194.852 GB of which 7,194.852 GB was utilized. The total Unused Storage capacity was 0.046 GB.


*Note: The configured Storage Devices may include additional storage capacity reserved for system overhead, which is not accessible for application use. That storage capacity may not be included in the value presented for Physical Storage Capacity.*



<b>SPC-1C Storage Capacities</b>		
<b>Storage Hierarchy Component</b>	<b>Units</b>	<b>Capacity</b>
Total ASU Capacity	Gigabytes (GB)	7,194.852
Addressable Storage Capacity	Gigabytes (GB)	7,194.876
Configured Storage Capacity	Gigabytes (GB)	14,389.751
Physical Storage Capacity	Gigabytes (GB)	14,403.054
Data Protection ( <i>Mirroring</i> )	Gigabytes (GB)	7,194.876
Required Storage	Gigabytes (GB)	0.268
Global Storage Overhead	Gigabytes (GB)	13.035
Total Unused Storage	Gigabytes (GB)	0.046


SPC-1C Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	100.00%	50.00%	49.95%
Required for Data Protection (RAID-5)		50.00%	49.95%
Addressable Storage Capacity		50.00%	49.95%
Required Storage		0.00%	0.00%
Configured Storage Capacity			99.91%
Global Storage Overhead			0.09%
Unused Storage:			
Addressable	0.00%		
Configured		0.00%	
Physical			0.00%

SPC-1C Storage Capacity Charts

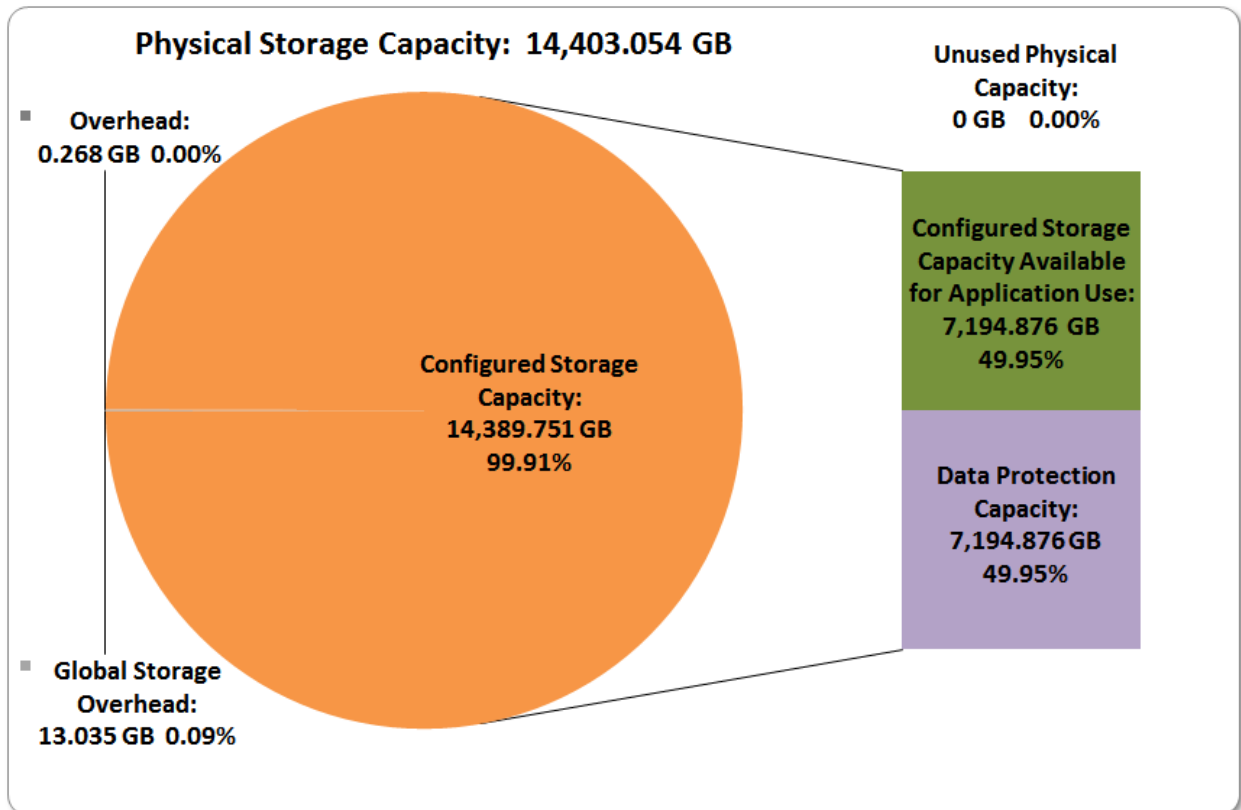

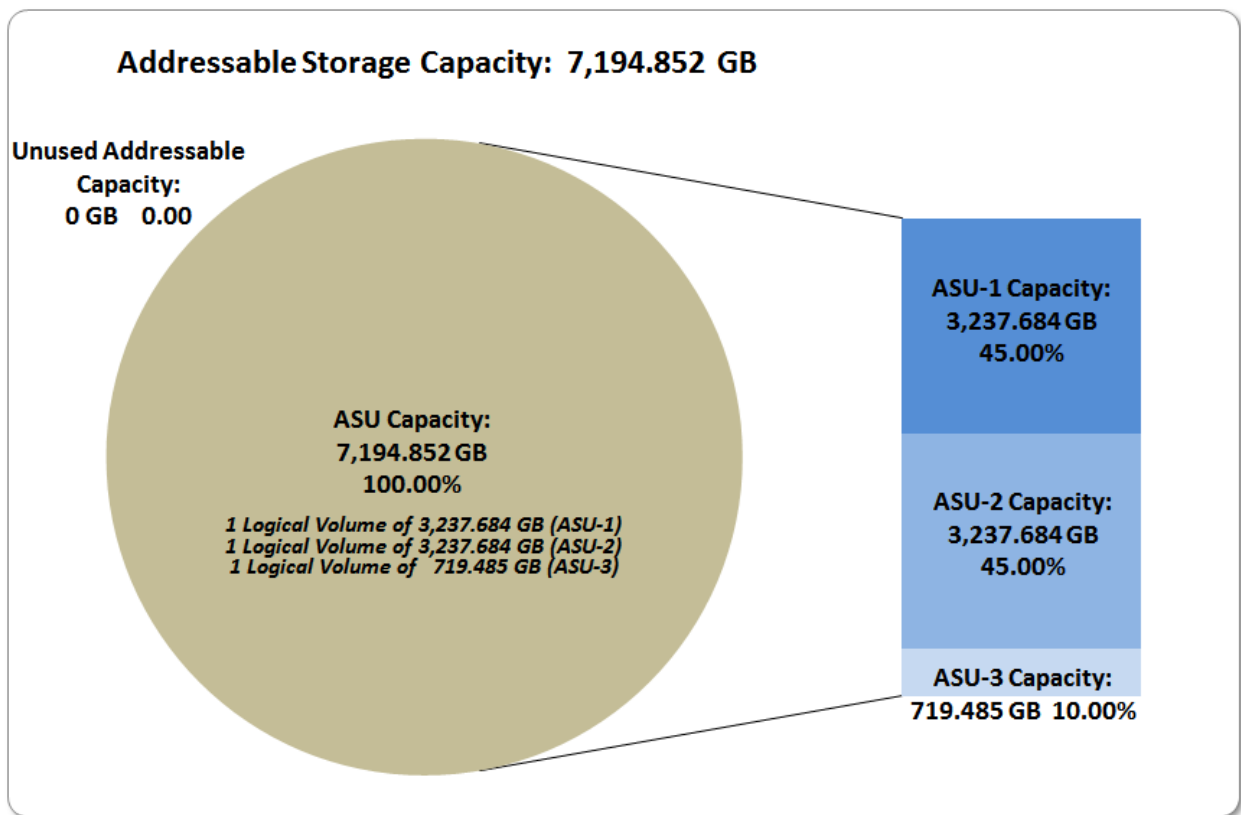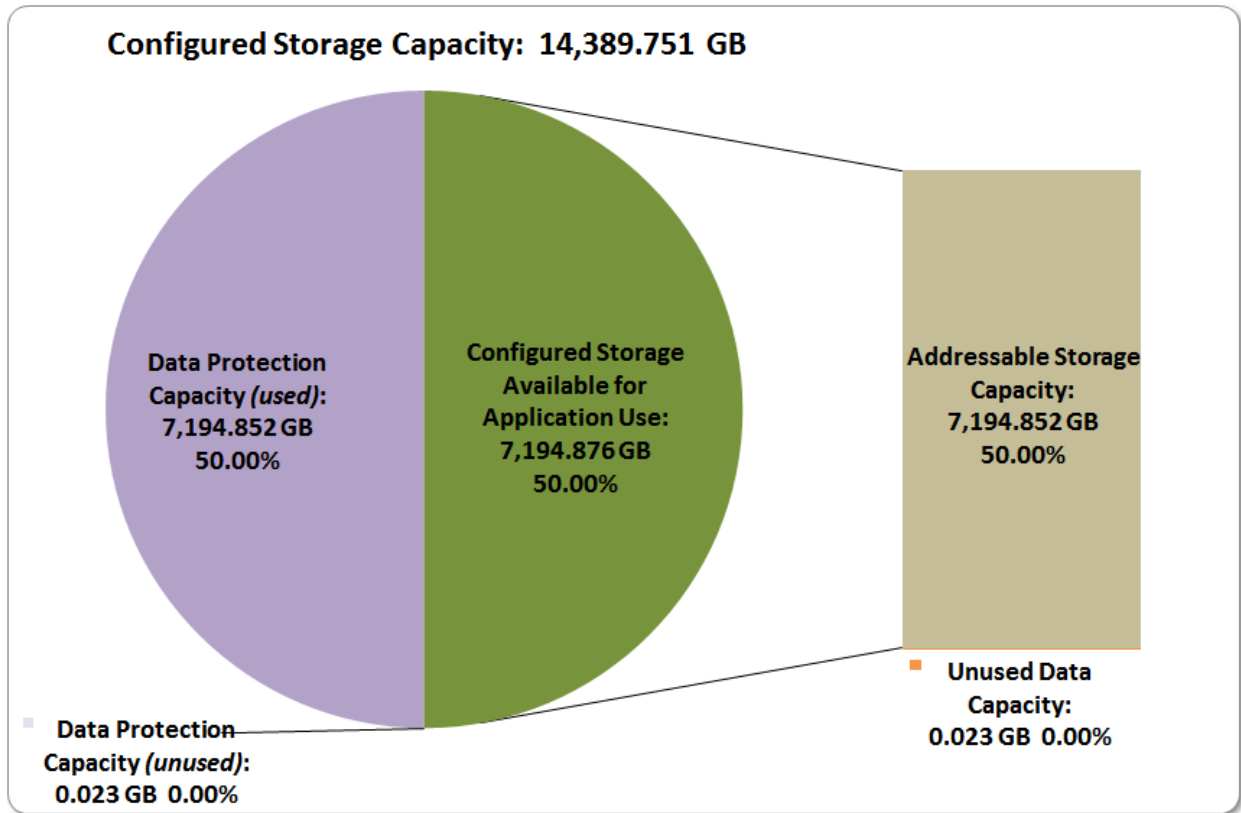

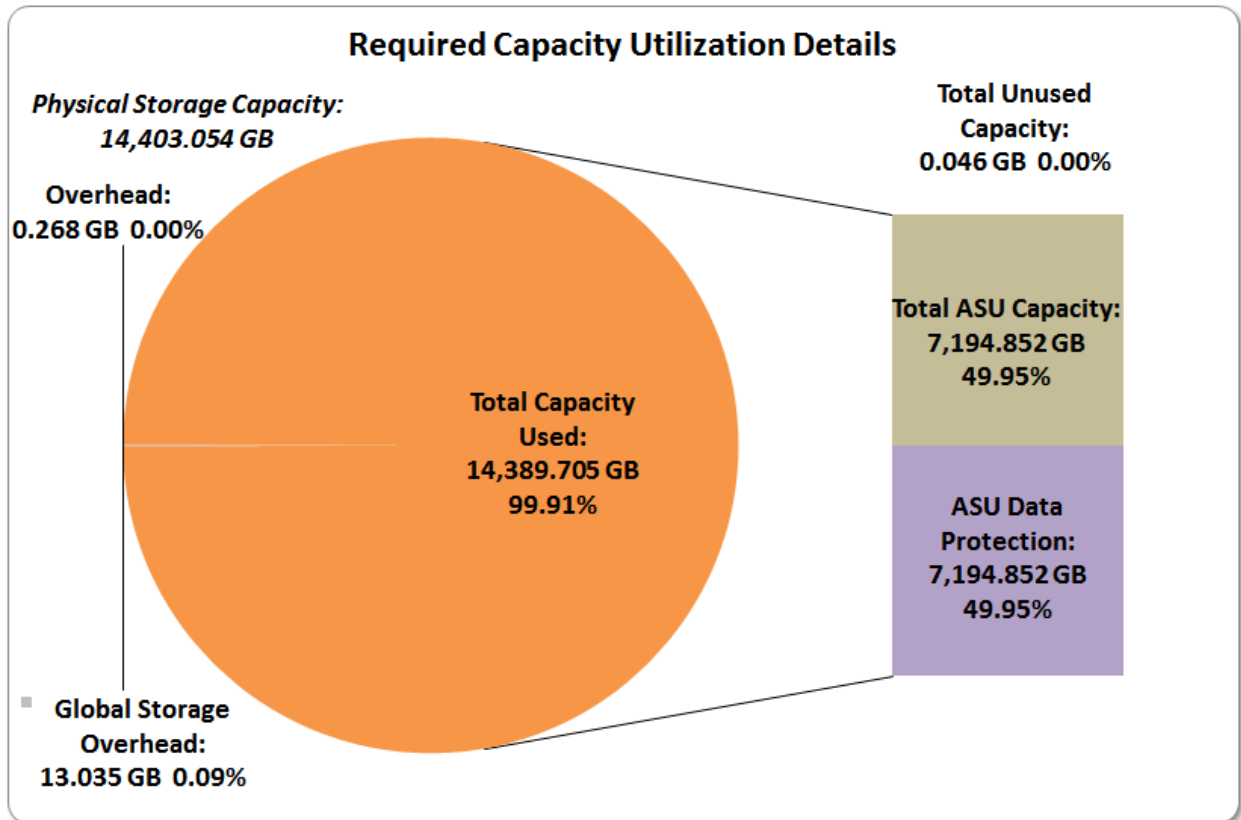

## Storage Capacity Utilization

### Clause 2.6.8

The Total ASU Capacity must be configured in one of the following relationships to the Physical Storage Capacity.

### Clause 2.6.8.1

**100%:** The Tested Storage Configuration must be configured so there is 1 GiB or less of total Unused Storage

### Clause 2.6.8.2

**50%:** Total ASU Capacity must be configured so that the sum of Total ASU Capacity and capacity required for data protection is 50% of the Physical Storage Capacity within a tolerance of  $\pm 1$  GiB or 0.5% of the Physical Storage Capacity, whichever is greater.

The TSC met the “100% utilization” requirement since it did not include any Unused Storage.

## Logical Volume Capacity and ASU Mapping

### Clause 10.4.7.2

A table illustrating the capacity of each ASU and the mapping of Logical Volumes to ASUs shall be provided in the FDR. ... Logical Volumes shall be sequenced in the table from top to bottom per its position in the contiguous address space of each ASU. The capacity of each Logical Volume shall be stated. ... In conjunction with this table, the Test Sponsor shall provide a complete description of the type of data protection (see Clause 2.7) used on each Logical Volume.

Logical Volume Capacity and Mapping		
ASU-1 (3,237.684 GB)	ASU-2 (3,237.684 GB)	ASU-3 (719.485 GB)
1 Logical Volume 3,237.684 GB per Logical Volume (3,237.684 GB used per Logical Volume)	1 Logical Volume 3,237.684 GB per Logical Volume (3,237.684 GB used per Logical Volume)	1 Logical Volume 719.485 GB per Logical Volume (719.485 GB used per Logical Volume)

The Data Protection Level used for all Logical Volumes was [Protected 1](#) using **Mirroring** as described on page [11](#). See “ASU Configuration” in the [IOPS Test Results File](#) for more detailed configuration information.



## **SPC-1C BENCHMARK EXECUTION RESULTS**

This portion of the Full Disclosure Report documents the results of the various SPC-1C Tests, Test Phases, and Test Runs. An [SPC-1C glossary](#) on page 57 contains definitions of terms specific to the SPC-1C Tests, Test Phases, and Test Runs.

### *Clause 6.4.2*

*The Tests must be executed in the following sequence: Primary Metrics, Repeatability, and Data Persistence. That required sequence must be uninterrupted from the start of Primary Metrics to the completion of Persistence Test Run 1.*

*Uninterrupted means the Benchmark Configuration shall not be power cycled, restarted, disturbed, altered, or adjusted during the selected Test sequence. If the selected Test sequence is interrupted, the SPC-1C measurement is invalid. This does not apply to the interruption caused by the Host System/TSC power cycle between Persistence Test Run 1 and Persistence Test Run 2.*

## **SPC-1C Tests, Test Phases, and Test Runs**

The SPC-1C benchmark consists of the following Tests, Test Phases, and Test Runs:

- **Primary Metrics Test**
  - Sustainability Test Phase and Test Run
  - IOPS Test Phase and Test Run
  - Response Time Ramp Test Phase
    - 95% of IOPS Test Run
    - 90% of IOPS Test Run
    - 80% of IOPS Test Run
    - 50% of IOPS Test Run
    - 10% of IOPS Test Run (LRT)
- **Repeatability Test**
  - Repeatability Test Phase 1
    - 10% of IOPS Test Run (LRT)
    - IOPS Test Run
  - Repeatability Test Phase 2
    - 10% of IOPS Test Run (LRT)
    - IOPS Test Run
- **Data Persistence Test**
  - Data Persistence Test Run 1
  - Data Persistence Test Run 2

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

## “Ramp-Up” Test Runs

### Clause 6.3.12

*In order to warm-up caches or perform the initial ASU data migration in a multi-tier configuration, a Test Sponsor may perform a series of “Ramp-Up” Test Runs as a substitute for an initial, gradual Ramp-Up.*

### Clause 6.3.12.4

*The “Ramp-Up” Test Runs will immediately precede the Primary Metrics Test as part of the uninterrupted SPC-1C measurement sequence.*

### Clause 10.4.8.1

*If a series of “Ramp-Up” Test Runs were included in the SPC-1C measurement sequence, the FDR shall report the duration (ramp-up and measurement interval), BSU level, SPC-1C IOPS and average response time for each “Ramp-Up” Test Run in an appropriate table.*

There were no “Ramp-Up” Test Runs executed in this set of benchmark measurements.

## Primary Metrics Test – Sustainability Test Phase

### Clause 6.4.3.2

*The Sustainability Test Phase has exactly one Test Run and shall demonstrate the maximum sustainable I/O Request Throughput within a continuous one (1) hour Measurement Interval.*

### Clause 6.4.3.2.6

*The computed I/O Request Throughput of the Sustainability Test Run must be no less than 95% of the reported SPC-1C IOPS™ result or the Test Run is invalid.*

### Clause 6.4.3.2.7

*The Average Response Time, as defined in Clause 0, will be computed and reported for the Sustainability Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds that 30-millisecond constraint, the Test Run is invalid.*

### Clause 10.4.8.2

*The FDR shall contain the following for the single Test Run in the Sustainability/IOPS Test Phase:*

- 1. A Data Rate Distribution graph and data table.*
- 2. I/O Request Throughput Distribution graph and data table.*
- 3. A Response Time Frequency Distribution graph and table.*
- 4. An Average Response Time Distribution graph and table.*
- 5. The human readable Test Run Results File produced by the Workload Generator (may be included in an appendix).*
- 6. A listing or screen image of all input parameters supplied to the Workload Generator (may be included in an appendix).*
- 7. The Measured Intensity Multiplier for each I/O stream.*
- 8. The variability of the Measured Intensity Multiplier, as defined in Clause 5.3.13.3.*

### SPC-1C Workload Generator Input Parameters

The SPC-1C Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1C Workload Generator Input Parameters](#) on Page 65.

### Sustainability Test Results File

A link to the test results file generated from the Sustainability Test Run is listed below.


[Sustainability Test Results File](#)

### Sustainability – Data Rate Distribution Data (MB/second)

The Sustainability Data Rate table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Data Rate Table](#)

### Sustainability – Data Rate Distribution Graph

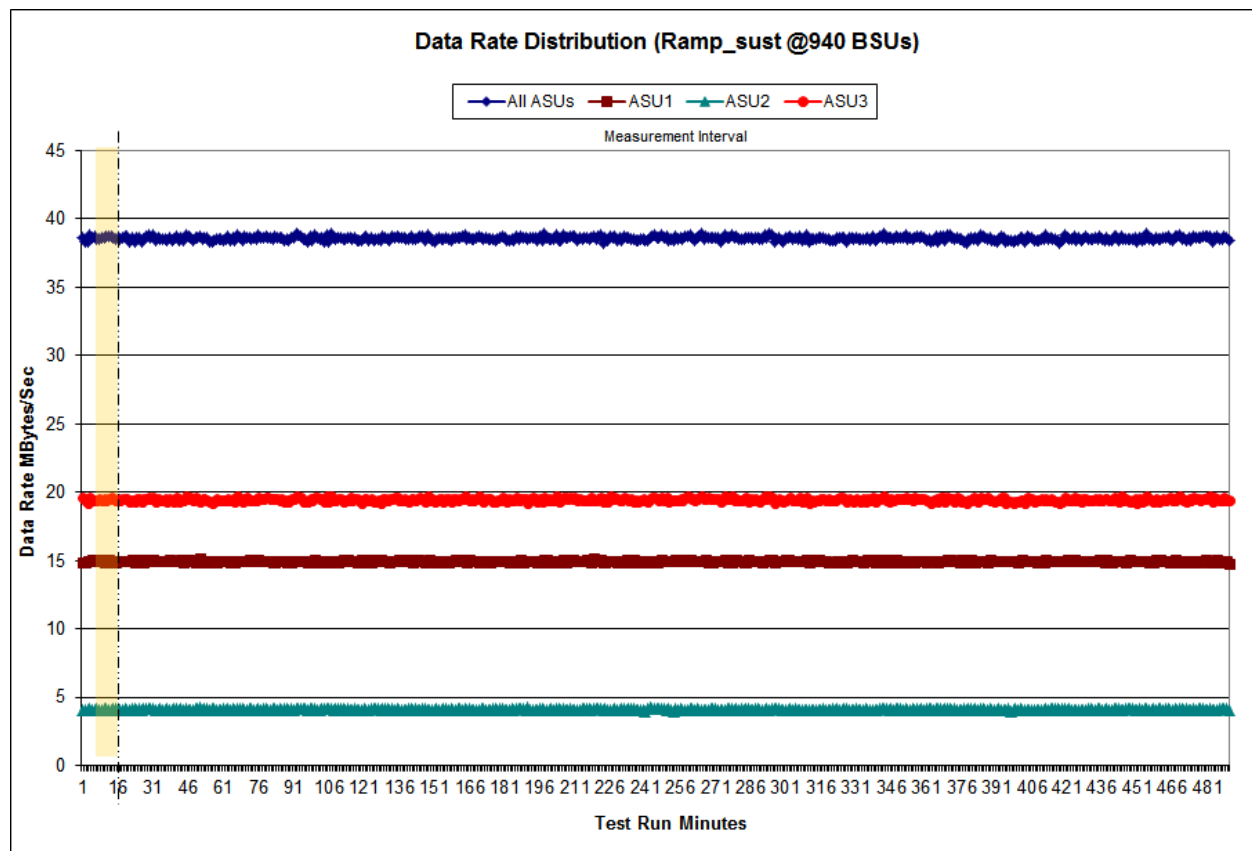


### Sustainability – I/O Request Throughput Distribution Data

The Sustainability I/O Request Throughput table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability I/O Request Throughput Table](#)

### Sustainability – I/O Request Throughput Distribution Graph

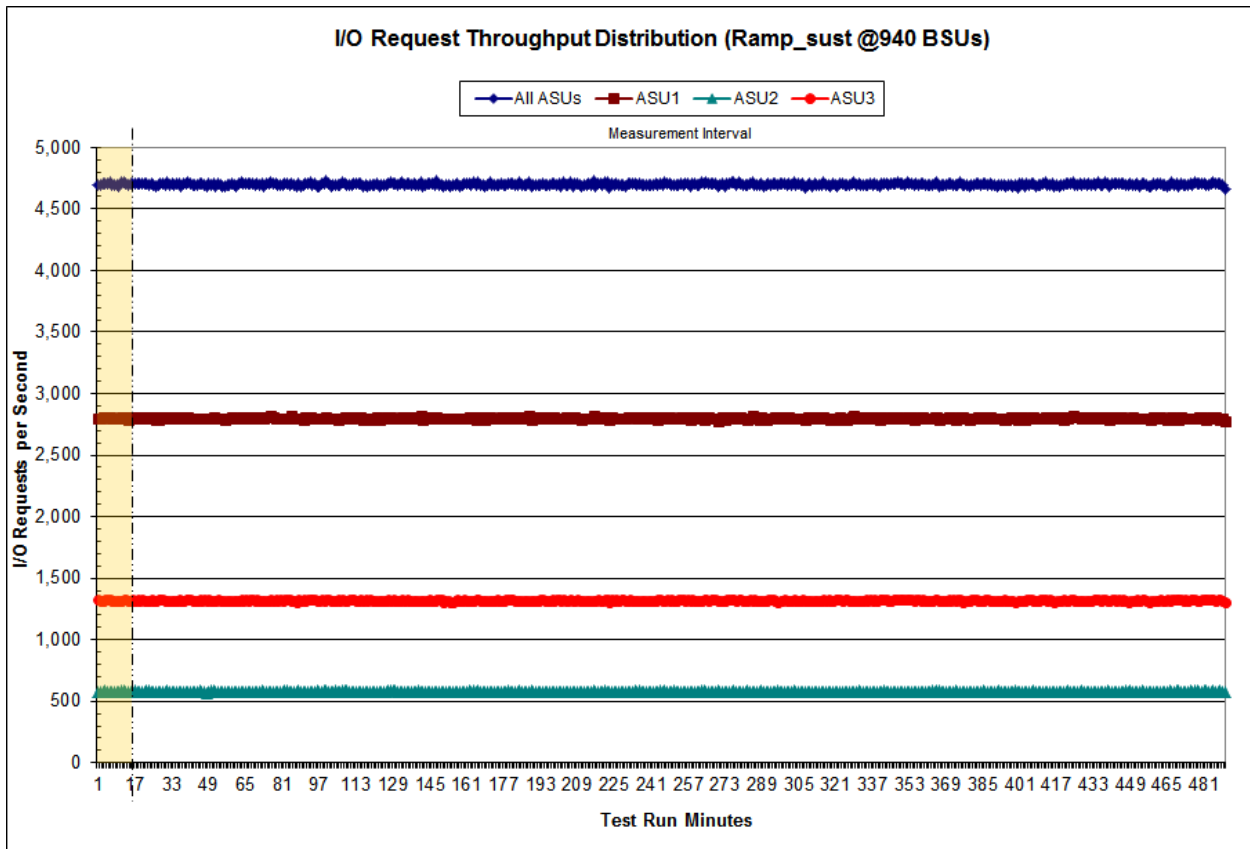


### Sustainability – Average Response Time (ms) Distribution Data

The Sustainability Average Response Time table of data is not embedded in this document due to its size. The table is available via the following URL:

[Sustainability Average Response Time Table](#)


### Sustainability – Average Response Time (ms) Distribution Graph

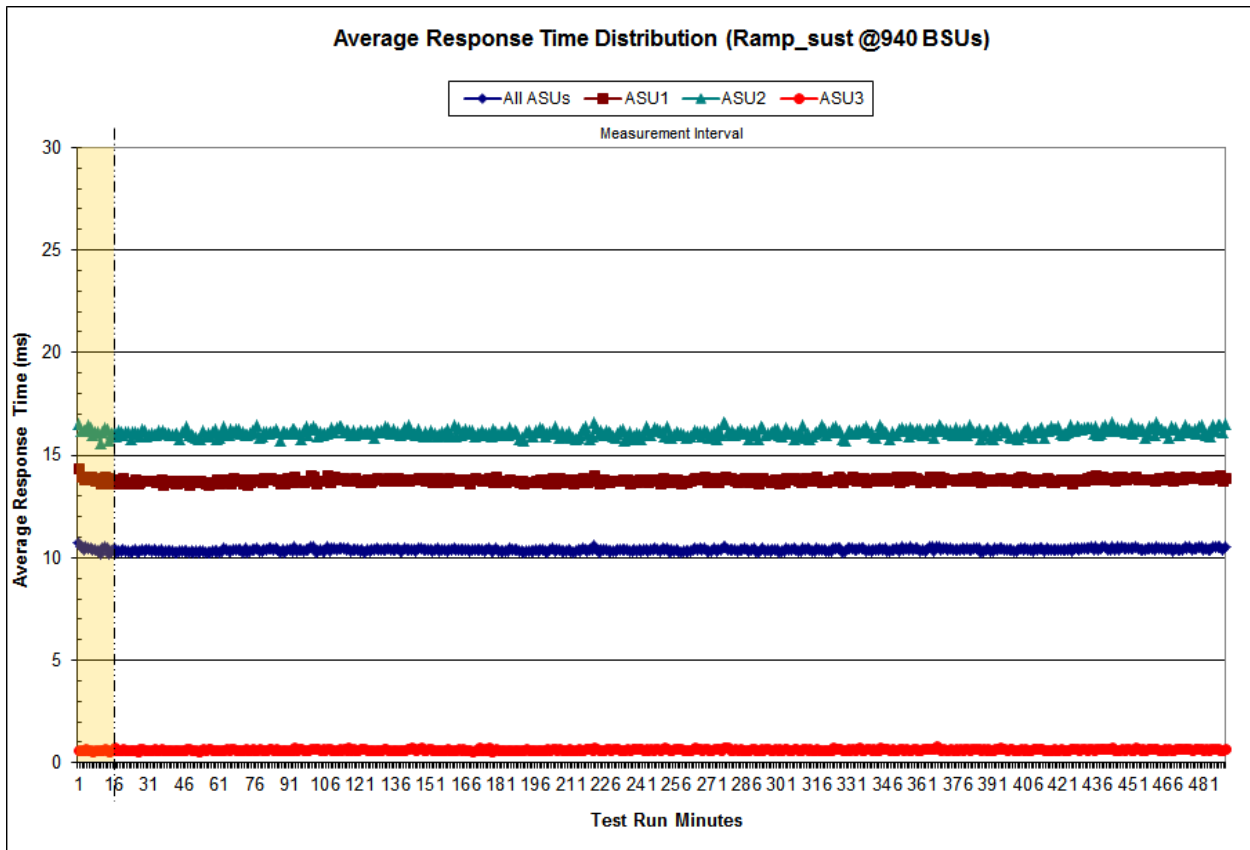

**Sustainability – Response Time Frequency Distribution Data**

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	310,832	79,493	32,426	21,618	71,043	126,276	178,795	203,292
Write	29,066,850	37,250,270	10,863,697	2,805,413	940,705	350,929	113,559	36,595
All ASUs	29,377,682	37,329,763	10,896,123	2,827,031	1,011,748	477,205	292,354	239,887
ASU1	14,889,150	14,758,763	4,465,880	1,077,437	442,082	262,773	216,547	208,912
ASU2	2,912,759	3,906,045	1,088,334	280,671	96,385	37,606	17,507	11,831
ASU3	11,575,773	18,664,955	5,341,909	1,468,923	473,281	176,826	58,300	19,144
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	617,981	755,911	1,094,175	1,191,694	1,464,766	1,428,821	2,868,777	2,514,804
Write	33,277	16,413	13,829	11,117	11,051	9,171	13,282	8,458
All ASUs	651,258	772,324	1,108,004	1,202,811	1,475,817	1,437,992	2,882,059	2,523,262
ASU1	601,596	721,093	1,027,578	1,086,257	1,307,269	1,262,117	2,492,825	2,152,238
ASU2	33,466	43,665	74,351	111,818	163,794	171,977	383,647	367,641
ASU3	16,196	7,566	6,075	4,736	4,754	3,898	5,587	3,383
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	2,088,178	1,855,275	1,679,982	6,779,475	5,030,299	3,983,681	3,261,504	15,754,127
Write	6,727	5,624	4,763	21,655	22,888	26,240	27,661	313,833
All ASUs	2,094,905	1,860,899	1,684,745	6,801,130	5,053,187	4,009,921	3,289,165	16,067,960
ASU1	1,774,009	1,593,720	1,439,072	5,737,634	4,212,959	3,327,248	2,724,167	12,893,649
ASU2	318,201	264,980	243,857	1,054,732	829,808	670,202	551,049	3,018,431
ASU3	2,695	2,199	1,816	8,764	10,420	12,471	13,949	155,880

**Sustainability – Response Time Frequency Distribution Graph**

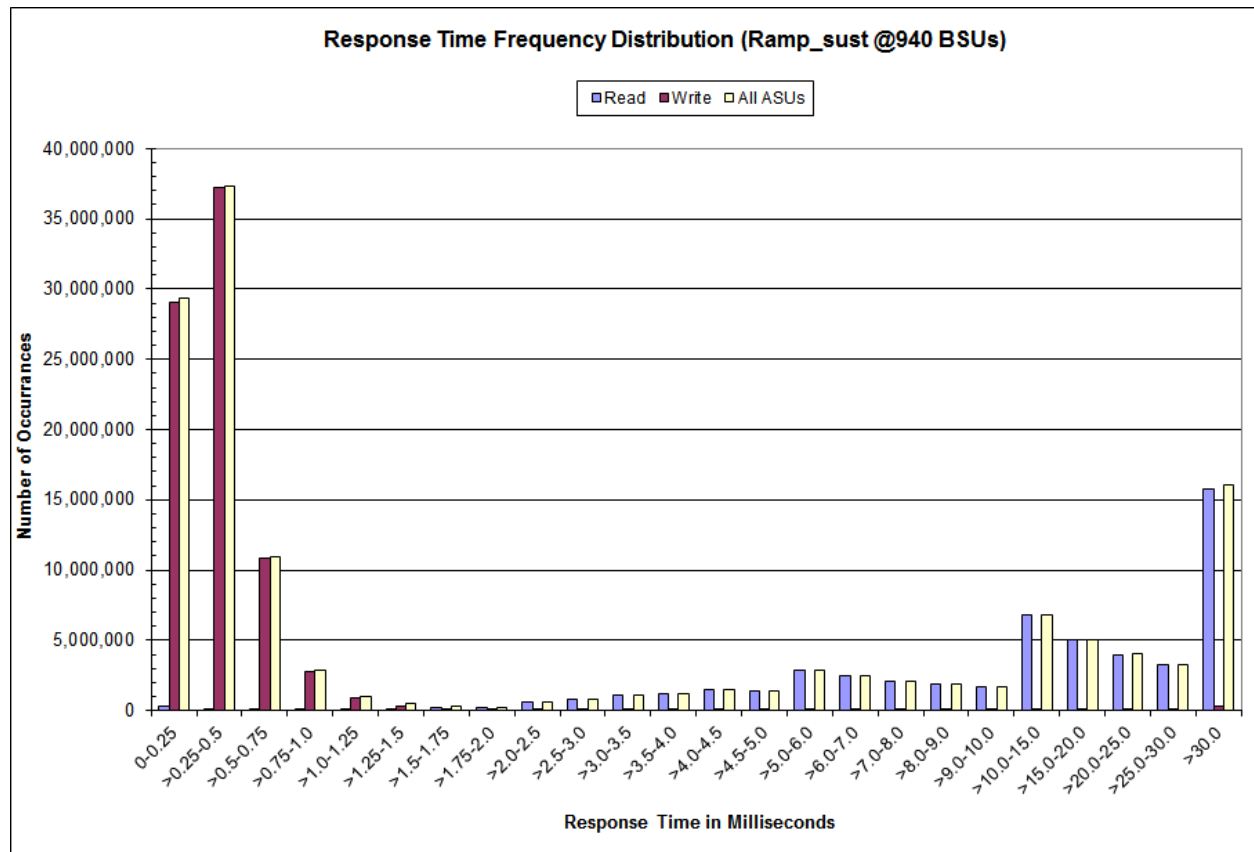

**Sustainability – Measured Intensity Multiplier and Coefficient of Variation**

Clause 3.4.3

**IM – Intensity Multiplier:** The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 6.1.10

**MIM – Measured Intensity Multiplier:** The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1).

Clause 6.3.14.3

**COV – Coefficient of Variation:** This measure of variation for the Measured Intensity Multiplier cannot exceed 0.5.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
MIM	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
COV	0.009	0.003	0.007	0.004	0.014	0.007	0.010	0.003

## Primary Metrics Test – IOPS Test Phase

### Clause 6.4.3.3

*The IOPS Test Phase consists of one Test Run at the 100% load point with a Measurement Interval of five (5) minutes. The IOPS Test Phase immediately follows the Sustainability Test Phase without any interruption or manual intervention.*

*The IOPS Test Run generates the SPC-1C IOPS™ primary metric, which is computed as the I/O Request Throughput for the Measurement Interval of the IOPS Test Run.*

*The Average Response Time is computed for the IOPS Test Run and cannot exceed 30 milliseconds. If the Average Response Time exceeds the 30 millisecond constraint, the measurement is invalid.*

### Clause 10.4.8.3

*For the IOPS Test Phase the FDR shall contain:*

- 1. I/O Request Throughput Distribution (data and graph).*
- 2. Response Time Frequency Distribution (data and graph).*
- 3. Average Response Time Distribution (data and graph).*
- 4. The human readable SPC-1C Test Run Results File produced by the SPC-1C Workload Generator.*
- 5. A listing of all input parameters supplied to the SPC-1C Workload Generator.*
- 6. The Measured Intensity Multiplier for each I/O Stream.*
- 7. The variability of the Measured Intensity Multiplier, as defined in Clause 6.3.13.3.*
- 8. The total number of I/O Requests completed in the Measurement Interval as well as the number of I/O Requests with a Response Time less than or equal to 30 milliseconds and the number of I/O Requests with a Response Time greater than 30 milliseconds.*

## SPC-1C Workload Generator Input Parameters

The SPC-1C Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1C Workload Generator Input Parameters](#) on Page [65](#).

## IOPS Test Results File

A link to the test results file generated from the IOPS Test Run is listed below.


[IOPS Test Results File](#)



### IOPS Test Run – I/O Request Throughput Distribution Data

940 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	20:03:40	20:13:40	0-9	0:10:00
Measurement Interval	20:13:40	20:23:40	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	4,697.50	2,807.42	580.02	1,310.07
1	4,698.60	2,800.50	580.10	1,318.00
2	4,697.55	2,799.45	574.80	1,323.30
3	4,708.47	2,803.50	576.32	1,328.65
4	4,699.40	2,798.57	580.83	1,320.00
5	4,693.85	2,800.98	573.62	1,319.25
6	4,696.33	2,799.60	577.72	1,319.02
7	4,704.80	2,805.58	573.93	1,325.28
8	4,688.55	2,796.35	575.15	1,317.05
9	4,699.97	2,809.78	574.63	1,315.55
10	4,703.07	2,798.47	582.10	1,322.50
11	4,700.62	2,795.65	584.27	1,320.70
12	4,693.65	2,794.32	575.77	1,323.57
13	4,703.27	2,804.02	577.57	1,321.68
14	4,694.22	2,805.00	578.57	1,310.65
15	4,718.33	2,807.88	582.47	1,327.98
16	4,693.33	2,801.70	574.98	1,316.65
17	4,710.58	2,804.65	578.47	1,327.47
18	4,705.82	2,812.38	579.25	1,314.18
19	4,681.70	2,792.15	574.47	1,315.08
<b>Average</b>	<b>4,700.46</b>	<b>2,801.62</b>	<b>578.79</b>	<b>1,320.05</b>


### IOPS Test Run – I/O Request Throughput Distribution Graph

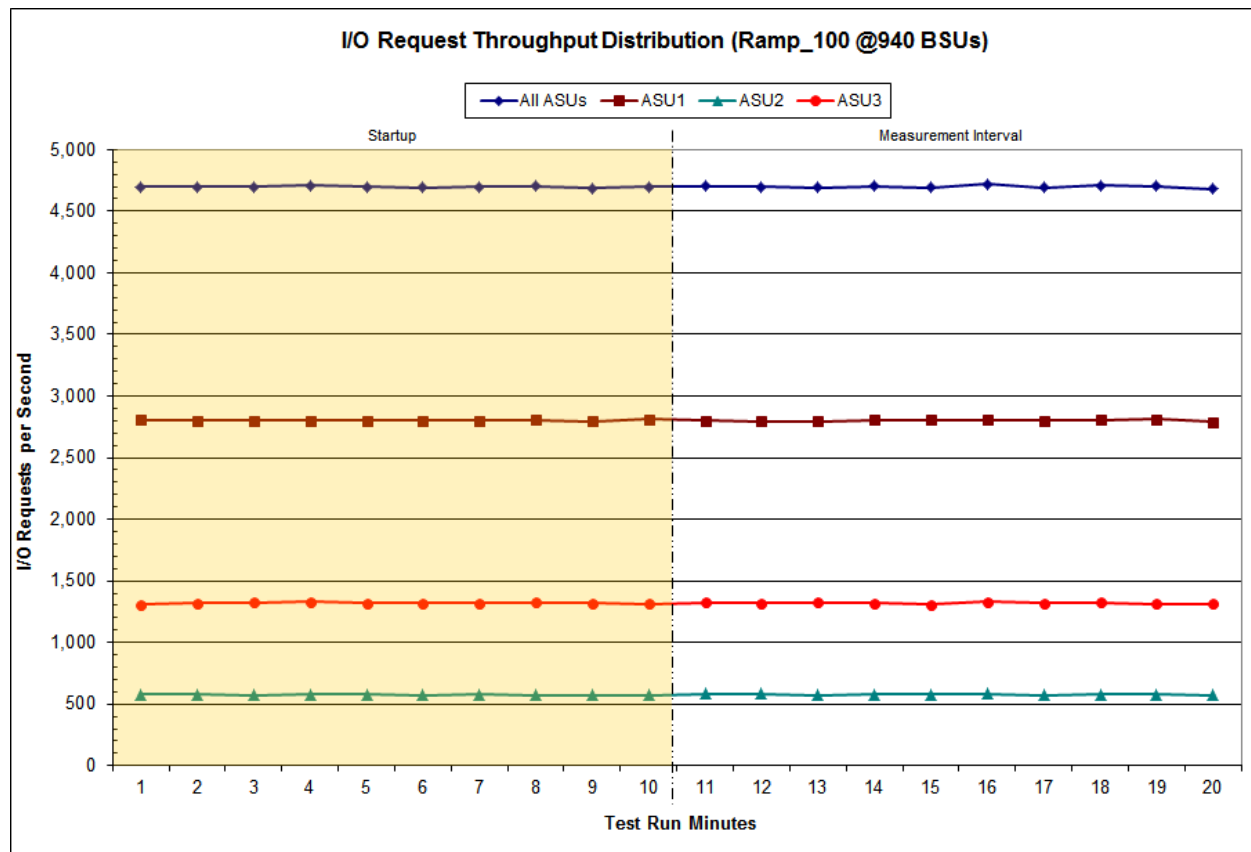

**IOPS Test Run – Average Response Time (ms) Distribution Data**

940 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	20:03:40	20:13:40	0-9	0:10:00
Measurement Interval	20:13:40	20:23:40	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	10.42	13.83	16.01	0.62
1	10.49	13.90	16.28	0.69
2	10.51	13.93	16.39	0.72
3	10.37	13.84	15.86	0.66
4	10.43	13.83	16.21	0.69
5	10.38	13.79	16.09	0.65
6	10.47	13.87	16.33	0.68
7	10.42	13.83	16.27	0.68
8	10.41	13.80	16.30	0.66
9	10.34	13.72	16.02	0.64
10	10.42	13.86	16.02	0.69
11	10.41	13.85	15.94	0.66
12	10.37	13.78	16.14	0.66
13	10.40	13.83	16.01	0.67
14	10.35	13.77	15.60	0.69
15	10.54	13.91	16.61	0.76
16	10.39	13.80	16.10	0.66
17	10.47	13.90	16.38	0.65
18	10.46	13.80	16.48	0.65
19	10.37	13.71	16.28	0.70
<b>Average</b>	<b>10.42</b>	<b>13.82</b>	<b>16.15</b>	<b>0.68</b>


**IOPS Test Run – Average Response Time (ms) Distribution Graph**

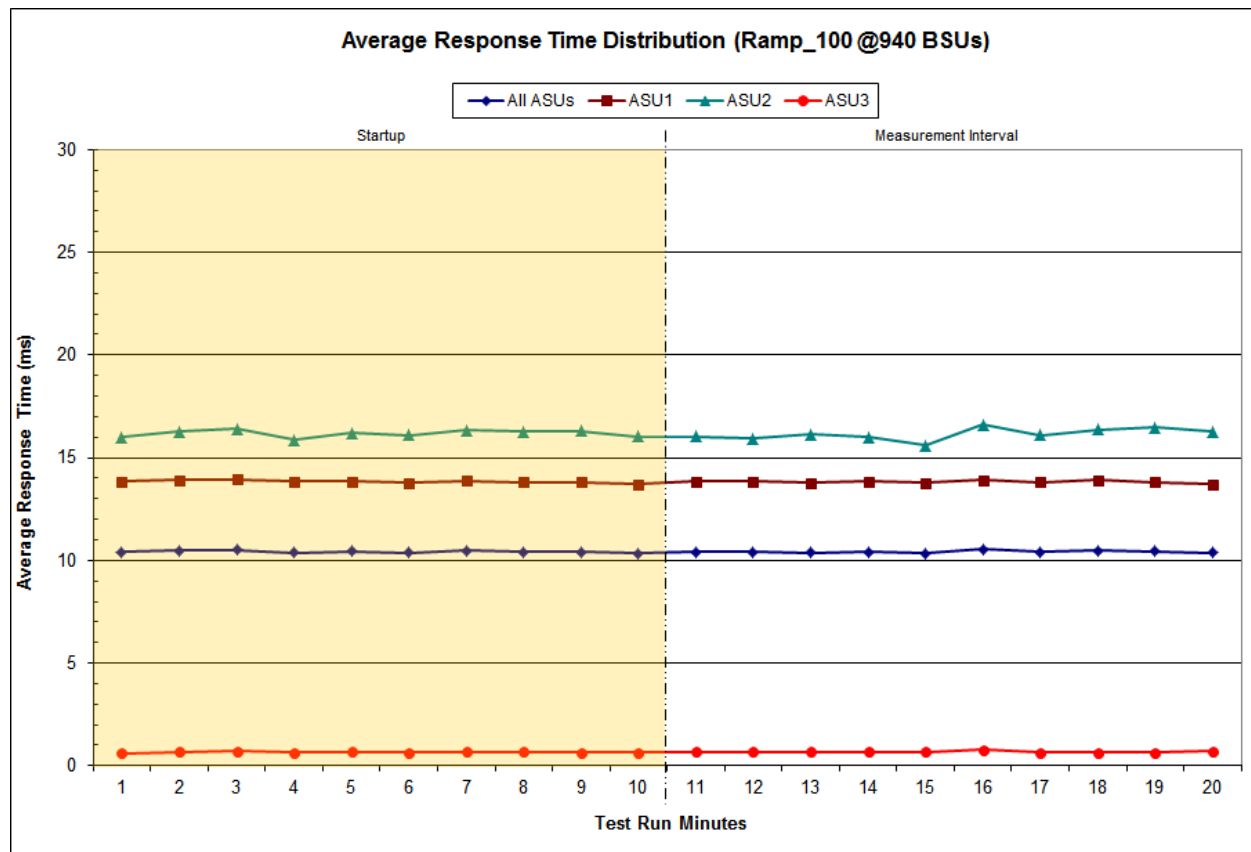

**IOPS Test Run –Response Time Frequency Distribution Data**

Response Time (ms)	0-0.25	>0.25-0.5	>0.5-0.75	>0.75-1.0	>1.0-1.25	>1.25-1.5	>1.5-1.75	>1.75-2.0
Read	6,593	1,627	699	457	1,490	2,725	3,665	4,317
Write	602,082	777,254	227,121	59,022	19,795	7,283	2,476	801
All ASUs	608,675	778,881	227,820	59,479	21,285	10,008	6,141	5,118
ASU1	309,037	308,250	93,362	22,592	9,275	5,588	4,497	4,473
ASU2	60,554	81,748	22,612	5,910	2,006	777	357	222
ASU3	239,084	388,883	111,846	30,977	10,004	3,643	1,287	423
Response Time (ms)	>2.0-2.5	>2.5-3.0	>3.0-3.5	>3.5-4.0	>4.0-4.5	>4.5-5.0	>5.0-6.0	>6.0-7.0
Read	12,724	15,505	22,504	24,762	30,549	29,730	59,411	52,203
Write	706	366	290	238	247	211	296	185
All ASUs	13,430	15,871	22,794	25,000	30,796	29,941	59,707	52,388
ASU1	12,440	14,875	21,117	22,564	27,271	26,280	51,704	44,598
ASU2	652	842	1,556	2,338	3,414	3,573	7,881	7,728
ASU3	338	154	121	98	111	88	122	62
Response Time (ms)	>7.0-8.0	>8.0-9.0	>9.0-10.0	>10.0-15.0	>15.0-20.0	>20.0-25.0	>25.0-30.0	>30.0
Read	43,534	38,668	34,898	141,602	104,365	82,952	67,731	329,293
Write	125	145	100	554	561	750	939	6,724
All ASUs	43,659	38,813	34,998	142,156	104,926	83,702	68,670	336,017
ASU1	36,953	33,287	29,881	120,041	87,368	69,391	56,745	269,384
ASU2	6,659	5,471	5,080	21,882	17,282	13,974	11,492	63,264
ASU3	47	55	37	233	276	337	433	3,369

**IOPS Test Run –Response Time Frequency Distribution Graph**

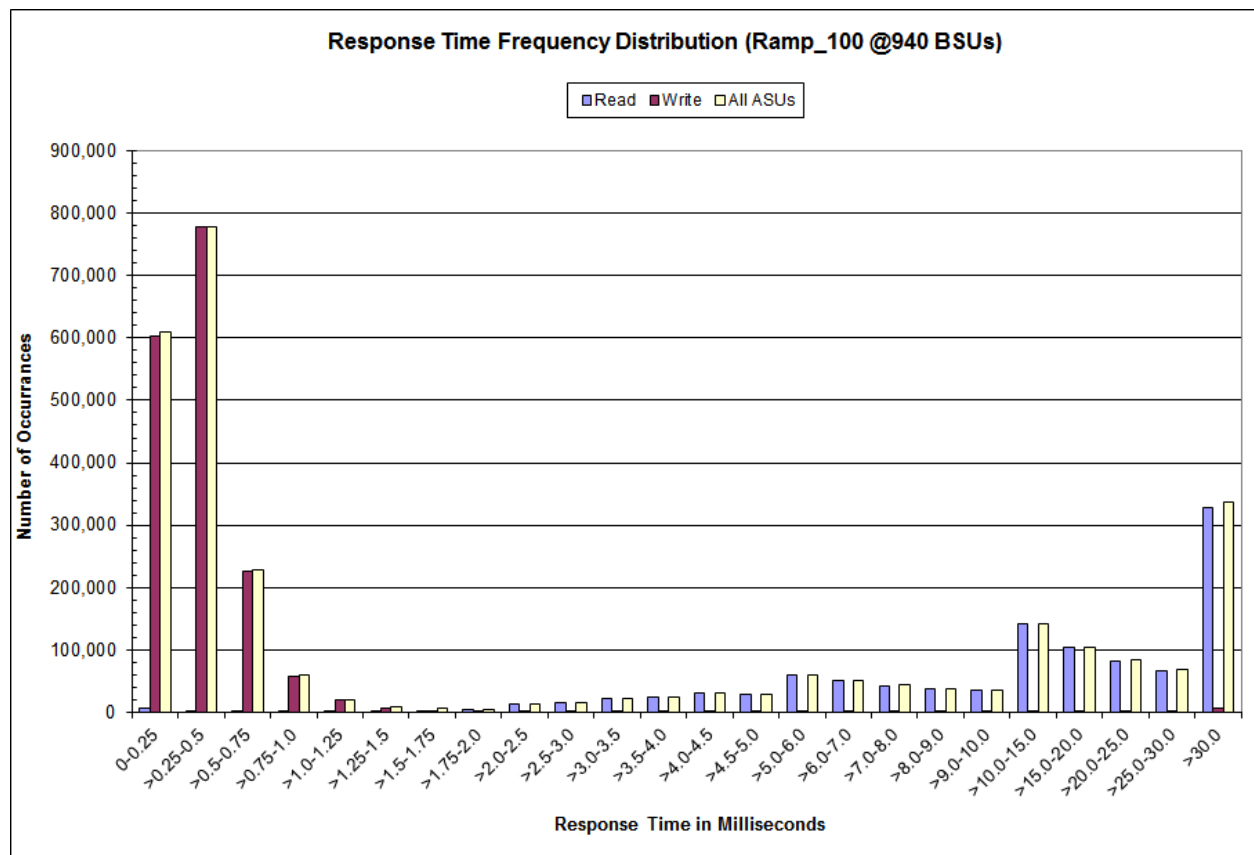

### IOPS Test Run – I/O Request Information

I/O Requests Completed in the Measurement Interval	I/O Requests Completed with Response Time = or < 30 ms	I/O Requests Completed with Response Time > 30 ms
2,820,275	2,484,258	336,017

### IOPS Test Run – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

**IM – Intensity Multiplier:** The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 6.1.10

**MIM – Measured Intensity Multiplier:** The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1).

Clause 6.3.14.3

**COV – Coefficient of Variation:** This measure of variation for the Measured Intensity Multiplier cannot exceed 0.5.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	<b>0.0350</b>	<b>0.2810</b>	<b>0.0700</b>	<b>0.2100</b>	<b>0.0180</b>	<b>0.0700</b>	<b>0.0350</b>	<b>0.2810</b>
MIM	0.0349	0.2808	0.0701	0.2102	0.0180	0.0700	0.0351	0.2808
COV	0.009	0.004	0.005	0.004	0.017	0.004	0.011	0.003

## Primary Metrics Test – Response Time Ramp Test Phase

### Clause 6.4.3.4

*The Response Time Ramp Test Phase consists of five Test Runs, one each at 95%, 90%, 80%, 50%, and 10% of the load point (100%) used to generate the SPC-1C IOPS™ primary metric. Each of the five Test Runs has a Measurement Interval of five (5) minutes. The Response Time Ramp Test Phase immediately follows the IOPS Test Phase without any interruption or manual intervention.*

*The five Response Time Ramp Test Runs, in conjunction with the IOPS Test Run (100%), demonstrate the relationship between Average Response Time and I/O Request Throughput for the Tested Storage Configuration (TSC) as illustrated in the response time/throughput curve on page 15.*

*In addition, the Average Response Time measured during the 10% Test Run is the value for the SPC-1C LRT™ metric. That value represents the Average Response Time of a lightly loaded TSC.*

### Clause 10.4.8.4

*The following content shall appear in the FDR for the Response Time Ramp Phase:*

- 1. A Response Time Ramp Distribution graph.*
- 2. The human readable Test Run Results File produced by the SPC-1C C Workload Generator for each Test Run within the Response Time Ramp Test Phase.*
- 3. An Average Response Time Distribution graph and table for the 10% BSU Level Test Run (the SPC-1C LRT™ metric).*
- 4. A listing of all input parameters supplied to the SPC-1C Workload Generator.*

## SPC-1C Workload Generator Input Parameters

The SPC-1C Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1C Workload Generator Input Parameters](#) on Page [65](#).

## Response Time Ramp Test Results File

A link to each test result file generated from each Response Time Ramp Test Run list listed below.

[95% Load Level](#)

[90% Load Level](#)

[80% Load Level](#)

[50% Load Level](#)

[10% Load Level](#)

### Response Time Ramp Distribution (IOPS) Data

The five Test Runs that comprise the Response Time Ramp Phase are executed at 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit (BSU) load level used to produce the SPC-1C IOPS™ primary metric. The 100% BSU load level is included in the following Response Time Ramp data table and graph for completeness.

100% Load Level - 940 BSUs					95% Load Level - 893 BSUs						
Start	Stop	Interval	Duration	Start	Stop	Interval	Duration	Start	Stop	Interval	Duration
20:03:40	20:13:40	0-9	0:10:00	20:23:42	20:33:42	0-9	0:10:00	20:03:40	20:13:40	0-9	0:10:00
Measurement Interval					Measurement Interval						
(60 second intervals)					(60 second intervals)						
All ASUs	ASU-1	ASU-2	ASU-3	All ASUs	ASU-1	ASU-2	ASU-3	All ASUs	ASU-1	ASU-2	ASU-3
0	4,697.50	2,807.42	580.02	1,310.07	0	4,455.33	2,656.90	547.77	1,250.67		
1	4,698.60	2,800.50	580.10	1,318.00	1	4,466.67	2,662.93	554.35	1,249.38		
2	4,697.55	2,799.45	574.80	1,323.30	2	4,477.28	2,669.32	546.48	1,261.48		
3	4,708.47	2,803.50	576.32	1,328.65	3	4,462.75	2,655.95	554.70	1,252.10		
4	4,699.40	2,798.57	580.83	1,320.00	4	4,463.18	2,659.50	549.22	1,254.47		
5	4,693.85	2,800.98	573.62	1,319.25	5	4,461.42	2,660.57	551.13	1,249.72		
6	4,696.33	2,799.60	577.72	1,319.02	6	4,458.38	2,653.57	551.77	1,253.05		
7	4,704.80	2,805.58	573.93	1,325.28	7	4,461.67	2,657.18	547.87	1,256.62		
8	4,688.55	2,796.35	575.15	1,317.05	8	4,462.50	2,658.68	550.38	1,253.43		
9	4,699.97	2,809.78	574.63	1,315.55	9	4,482.55	2,661.77	555.10	1,265.68		
10	4,703.07	2,798.47	582.10	1,322.50	10	4,466.42	2,656.38	552.17	1,257.87		
11	4,700.62	2,795.65	584.27	1,320.70	11	4,473.45	2,676.28	542.80	1,254.37		
12	4,693.65	2,794.32	575.77	1,323.57	12	4,473.15	2,660.08	549.68	1,263.38		
13	4,703.27	2,804.02	577.57	1,321.68	13	4,469.85	2,673.45	543.63	1,252.77		
14	4,694.22	2,805.00	578.57	1,310.65	14	4,477.62	2,661.03	549.67	1,266.92		
15	4,718.33	2,807.88	582.47	1,327.98	15	4,466.90	2,654.98	548.27	1,263.65		
16	4,693.33	2,801.70	574.98	1,316.65	16	4,475.23	2,663.72	552.60	1,258.92		
17	4,710.58	2,804.65	578.47	1,327.47	17	4,468.90	2,664.98	552.17	1,251.75		
18	4,705.82	2,812.38	579.25	1,314.18	18	4,463.40	2,658.07	548.87	1,256.47		
19	4,681.70	2,792.15	574.47	1,315.08	19	4,456.68	2,653.32	548.27	1,255.10		
<b>Average</b>	<b>4,700.46</b>	<b>2,801.62</b>	<b>578.79</b>	<b>1,320.05</b>	<b>Average</b>	<b>4,469.16</b>	<b>2,662.23</b>	<b>548.81</b>	<b>1,258.12</b>		


  

90% Load Level - 846 BSUs					80% Load Level - 752 BSUs						
Start	Stop	Interval	Duration	Start	Stop	Interval	Duration	Start	Stop	Interval	Duration
20:43:44	20:53:44	0-9	0:10:00	21:03:46	21:13:46	0-9	0:10:00	20:43:44	20:53:44	0-9	0:10:00
Measurement Interval					Measurement Interval						
(60 second intervals)					(60 second intervals)						
All ASUs	ASU-1	ASU-2	ASU-3	All ASUs	ASU-1	ASU-2	ASU-3	All ASUs	ASU-1	ASU-2	ASU-3
0	4,218.12	2,516.40	520.50	1,181.22	0	3,770.73	2,257.93	460.65	1,052.15		
1	4,234.70	2,524.03	517.97	1,192.70	1	3,747.78	2,228.72	462.38	1,056.68		
2	4,235.27	2,523.57	520.88	1,190.82	2	3,764.13	2,237.32	464.97	1,061.85		
3	4,223.72	2,512.97	519.17	1,191.58	3	3,758.88	2,238.43	462.88	1,057.57		
4	4,235.40	2,519.93	520.80	1,194.67	4	3,758.05	2,237.45	463.88	1,056.72		
5	4,240.92	2,525.17	524.52	1,191.23	5	3,751.97	2,237.02	456.65	1,058.30		
6	4,221.92	2,518.95	517.52	1,185.45	6	3,765.02	2,237.78	464.42	1,062.82		
7	4,234.78	2,515.40	522.85	1,196.53	7	3,743.95	2,230.13	456.17	1,057.65		
8	4,225.28	2,512.87	520.32	1,192.10	8	3,754.70	2,234.97	459.53	1,060.20		
9	4,236.98	2,529.68	522.48	1,184.82	9	3,767.23	2,245.27	464.87	1,057.10		
10	4,220.18	2,513.88	519.50	1,186.80	10	3,747.57	2,237.25	461.40	1,048.92		
11	4,223.85	2,519.15	521.25	1,183.45	11	3,753.85	2,232.48	463.58	1,057.78		
12	4,228.87	2,519.93	520.38	1,188.55	12	3,758.72	2,244.13	459.08	1,055.50		
13	4,228.88	2,526.52	518.13	1,184.23	13	3,768.72	2,243.03	463.68	1,062.00		
14	4,233.98	2,524.58	521.72	1,187.68	14	3,757.73	2,233.03	463.35	1,061.35		
15	4,218.52	2,520.52	517.28	1,180.72	15	3,764.87	2,253.90	458.58	1,052.38		
16	4,230.38	2,513.18	519.63	1,197.57	16	3,773.77	2,247.68	461.17	1,064.92		
17	4,229.20	2,525.55	516.38	1,187.27	17	3,752.70	2,233.33	463.57	1,055.80		
18	4,212.77	2,508.82	517.78	1,186.17	18	3,768.07	2,238.52	466.52	1,063.03		
19	4,211.90	2,504.32	521.58	1,186.00	19	3,749.95	2,227.88	458.25	1,063.82		
<b>Average</b>	<b>4,223.85</b>	<b>2,517.65</b>	<b>519.37</b>	<b>1,186.84</b>	<b>Average</b>	<b>3,759.59</b>	<b>2,239.13</b>	<b>461.92</b>	<b>1,058.55</b>		

**Response Time Ramp Distribution (IOPS) Data (continued)**

50% Load Level - 470 BSUs					10% Load Level - 94 BSUs				
Start-Up/Ramp-Up Measurement Interval	Start	Stop	Interval	Duration	Start-Up/Ramp-Up Measurement Interval	Start	Stop	Interval	Duration
(60 second intervals)	21:23:48	21:33:48	0-9	0:10:00	(60 second intervals)	21:43:50	21:53:50	0-9	0:10:00
	21:33:48	21:43:48	10-19	0:10:00		21:53:50	22:03:50	10-19	0:10:00
	<b>All ASUs</b>	<b>ASU-1</b>	<b>ASU-2</b>	<b>ASU-3</b>		<b>All ASUs</b>	<b>ASU-1</b>	<b>ASU-2</b>	<b>ASU-3</b>
0	2,344.42	1,396.30	287.85	660.27	0	469.57	279.88	56.65	133.03
1	2,348.18	1,397.85	287.25	663.08	1	467.68	280.92	56.53	130.23
2	2,349.15	1,400.88	288.38	659.88	2	469.78	280.08	56.93	132.77
3	2,343.40	1,396.48	290.23	656.68	3	465.57	276.68	57.15	131.73
4	2,351.25	1,403.95	289.55	657.75	4	467.58	279.73	57.23	130.62
5	2,350.32	1,405.67	286.52	658.13	5	470.12	280.88	58.72	130.52
6	2,348.40	1,397.50	289.50	661.40	6	465.70	276.28	58.70	130.72
7	2,352.53	1,400.63	292.58	659.32	7	471.57	281.82	58.40	131.35
8	2,352.12	1,408.72	291.55	651.85	8	469.05	281.73	57.10	130.22
9	2,354.93	1,399.87	289.47	665.60	9	468.75	277.50	57.77	133.48
10	2,352.55	1,401.65	288.83	662.07	10	469.10	277.60	58.37	133.13
11	2,343.92	1,397.67	290.38	655.87	11	471.18	280.15	58.58	132.45
12	2,350.97	1,400.17	288.93	661.87	12	466.63	277.22	57.30	132.12
13	2,347.80	1,397.70	289.15	660.95	13	470.77	278.22	57.30	135.25
14	2,349.60	1,402.73	286.02	660.85	14	468.48	275.03	60.17	133.28
15	2,349.32	1,397.10	291.83	660.38	15	466.12	278.50	57.10	130.52
16	2,355.02	1,402.08	289.60	663.33	16	470.32	278.50	58.05	133.77
17	2,348.88	1,399.82	289.15	659.92	17	471.10	282.53	57.55	131.02
18	2,350.83	1,403.35	288.17	659.32	18	473.55	282.92	55.80	134.83
19	2,344.98	1,400.30	288.57	656.12	19	466.85	280.80	57.88	128.17
<b>Average</b>	<b>2,349.39</b>	<b>1,400.26</b>	<b>289.06</b>	<b>660.07</b>	<b>Average</b>	<b>469.41</b>	<b>279.15</b>	<b>57.81</b>	<b>132.45</b>


**Response Time Ramp Distribution (IOPS) Graph**

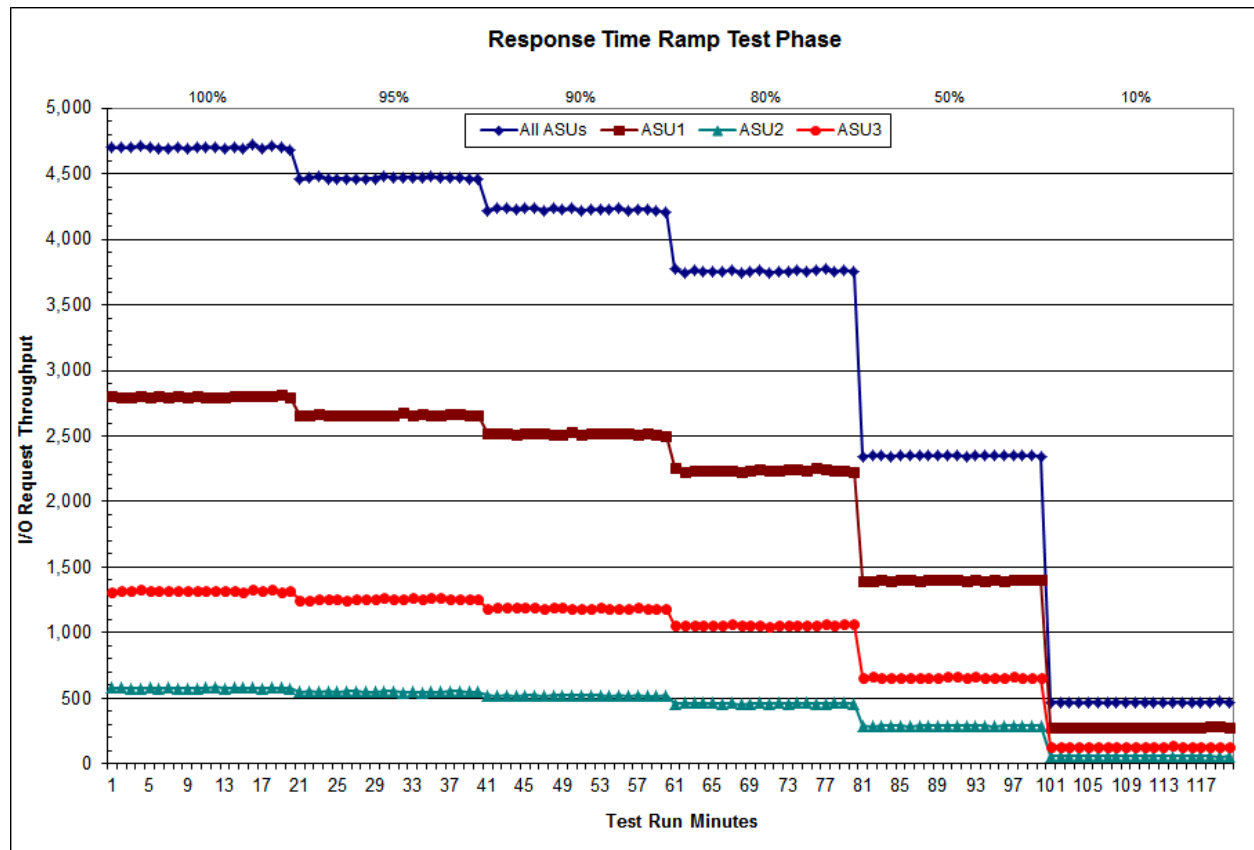

**SPC-1C LRT™ Average Response Time (ms) Distribution Data**

94 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	21:43:50	21:53:50	0-9	0:10:00
Measurement Interval	21:53:50	22:03:50	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.48	3.35	3.28	0.30
1	2.45	3.31	3.14	0.29
2	2.44	3.32	3.14	0.30
3	2.44	3.33	3.10	0.30
4	2.44	3.28	3.20	0.30
5	2.40	3.23	3.14	0.29
6	2.41	3.27	3.05	0.31
7	2.37	3.19	3.11	0.30
8	2.47	3.32	3.22	0.31
9	2.44	3.33	3.06	0.30
10	2.36	3.23	2.93	0.29
11	2.40	3.23	3.22	0.30
12	2.39	3.23	3.14	0.30
13	2.43	3.32	3.13	0.31
14	2.43	3.32	3.04	0.30
15	2.43	3.26	3.26	0.30
16	2.34	3.18	2.99	0.29
17	2.44	3.28	3.21	0.30
18	2.46	3.34	3.23	0.30
19	2.43	3.29	2.96	0.31
<b>Average</b>	<b>2.41</b>	<b>3.27</b>	<b>3.11</b>	<b>0.30</b>

**SPC-1C LRT™ Average Response Time (ms) Distribution Graph**

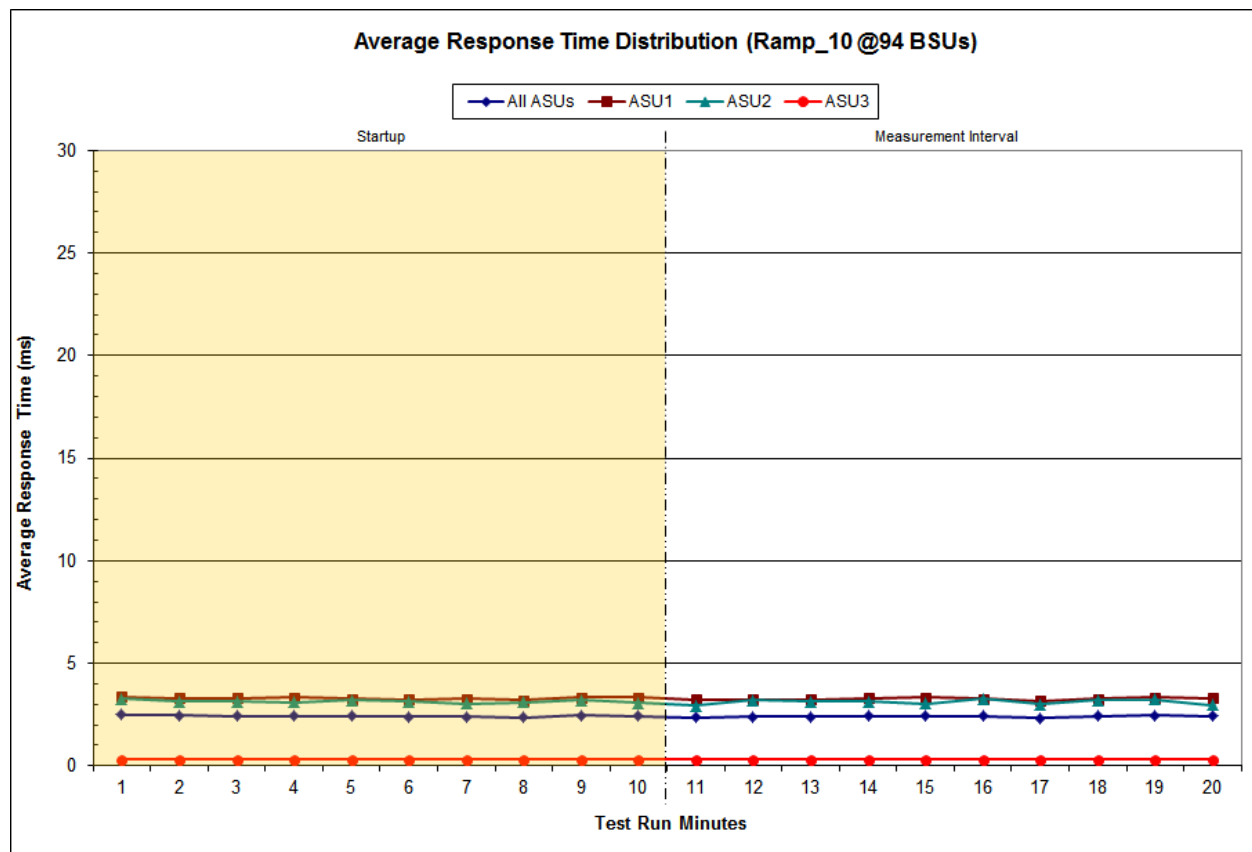



### SPC-1C LRT™ (10%) – Measured Intensity Multiplier and Coefficient of Variation

Clause 3.4.3

**IM – Intensity Multiplier:** The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 6.1.10

**MIM – Measured Intensity Multiplier:** The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1).

Clause 6.3.14.3

**COV – Coefficient of Variation:** This measure of variation for the Measured Intensity Multiplier cannot exceed 0.5.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	<b>0.0350</b>	<b>0.2810</b>	<b>0.0700</b>	<b>0.2100</b>	<b>0.0180</b>	<b>0.0700</b>	<b>0.0350</b>	<b>0.2810</b>
MIM	0.0354	0.2800	0.0702	0.2092	0.0185	0.0700	0.0347	0.2822
COV	0.042	0.009	0.022	0.013	0.042	0.029	0.029	0.013

## Repeatability Test

### Clause 6.4.4

*The Repeatability Test demonstrates the repeatability and reproducibility of the SPC-1C IOPS™ primary metric and SPC-1C LRT™ metric generated in earlier Test Runs.*

*There are two identical Repeatability Test Phases. Each Test Phase contains two Test Runs. Each of the Test Runs will have a Measurement Interval of no less than five (5) minutes. The two Test Runs in each Test Phase will be executed without interruption or any type of manual intervention.*

*The first Test Run in each Test Phase is executed at the 10% load point. The Average Response Time from each of the Test Runs is compared to the SPC-1C LRT™ metric. Each Average Response Time value must be less than the SPC-1C LRT™ metric plus 5%.*

*The second Test Run in each Test Phase is executed at the 100% load point. The I/O Request Throughput from the Test Runs is compared to the SPC-1C IOPS™ primary metric. Each I/O Request Throughput value must be greater than the SPC-1C IOPS™ primary metric minus 5%. In addition, the Average Response Time for each Test Run cannot exceed 30 milliseconds.*

*If any of the above constraints are not met, the benchmark measurement is invalid.*

### Clause 10.4.8.5

*The FDR shall contain the following for the Repeatability Test:*

- 1. A table containing the results of the Repeatability Test.*
- 2. I/O Request Throughput Distribution graph and table for each Repeatability Test Run.*
- 3. An Average Response Time Distribution graph and table for each Repeatability Test Run.*
- 4. The human readable Test Run Results File produced by the Workload Generator. The human readable Test Run Results File produced by the SPC-1C C Workload Generator.*
- 5. A listing of all input parameters supplied to the SPC-1C Workload Generator.*

## SPC-1C Workload Generator Input Parameters

The SPC-1C Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1C Workload Generator Input Parameters](#) on Page 65.

**Repeatability Test Results File**

The values for the SPC-1C IOPS™, SPC-1C LRT™, and the Repeatability Test measurements are listed in the tables below.

	<b>SPC-1C IOPS™</b>
<b>Primary Metrics</b>	<b>4,700.46</b>
<b>Repeatability Test Phase 1</b>	4,692.65
<b>Repeatability Test Phase 2</b>	4,698.41

The SPC-1C IOPS™ values in the above table were generated using 100% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1C IOPS™ must be greater than 95% of the reported SPC-1C IOPS™ Primary Metric.

	<b>SPC-1C LRT™</b>
<b>Primary Metrics</b>	<b>2.41 ms</b>
<b>Repeatability Test Phase 1</b>	2.41 ms
<b>Repeatability Test Phase 2</b>	2.41 ms

The average response time values in the SPC-1C LRT™ column were generated using 10% of the specified Business Scaling Unit (BSU) load level. Each of the Repeatability Test Phase values for SPC-1C LRT™ must be less than 105% of the reported SPC-1C LRT™ Primary Metric or less than the reported SPC-1C LRT™ Primary Metric minus one (1) millisecond (ms).


A link to the test result file generated from each Repeatability Test Run is listed below.

- [Repeatability Test Phase 1, Test Run 1 \(LRT\)](#)
- [Repeatability Test Phase 1, Test Run 2 \(IOPS\)](#)
- [Repeatability Test Phase 2, Test Run 1 \(LRT\)](#)
- [Repeatability Test Phase 2, Test Run 2 \(IOPS\)](#)

**Repeatability 1 LRT – I/O Request Throughput Distribution Data**

94 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:03:52	22:13:52	0-9	0:10:00
<i>Measurement Interval</i>	22:13:52	22:23:52	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	466.58	277.08	57.55	131.95
1	470.60	278.75	57.90	133.95
2	465.93	277.22	57.90	130.82
3	464.75	276.72	55.97	132.07
4	471.47	281.68	58.88	130.90
5	464.42	277.25	56.62	130.55
6	473.45	280.83	59.65	132.97
7	468.32	279.93	57.75	130.63
8	469.03	280.25	56.12	132.67
9	469.05	280.07	57.13	131.85
10	471.17	282.00	59.02	130.15
11	466.92	279.27	58.00	129.65
12	465.95	279.12	57.50	129.33
13	469.33	278.30	55.70	135.33
14	461.62	274.22	56.52	130.88
15	468.37	280.68	56.73	130.95
16	470.92	280.18	57.38	133.35
17	469.60	278.67	59.18	131.75
18	472.60	282.52	57.83	132.25
19	473.35	282.85	58.83	131.67
<i>Average</i>	<b>468.98</b>	<b>279.78</b>	<b>57.67</b>	<b>131.53</b>


**Repeatability 1 LRT – I/O Request Throughput Distribution Graph**

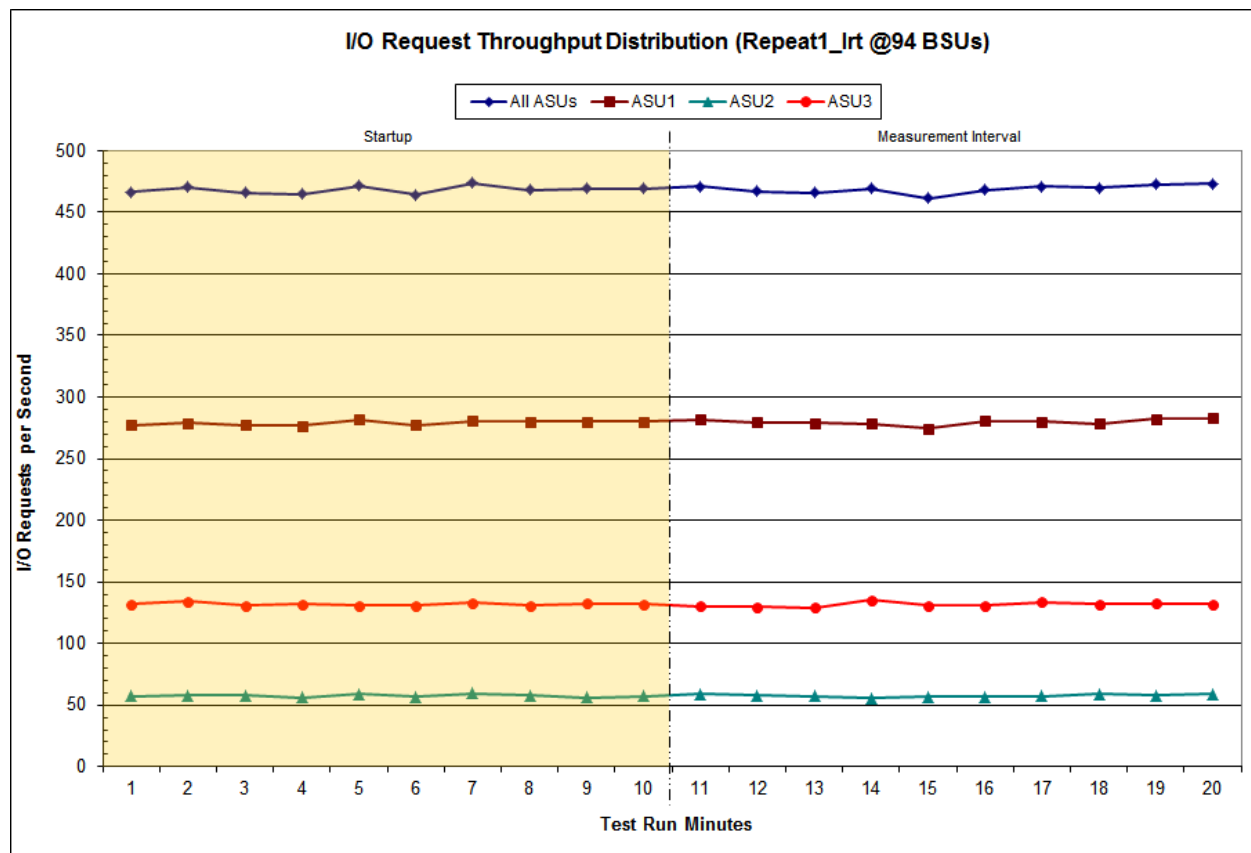

**Repeatability 1 LRT –Average Response Time (ms) Distribution Data**

94 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:03:52	22:13:52	0-9	0:10:00
<i>Measurement Interval</i>	22:13:52	22:23:52	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.47	3.33	3.30	0.30
1	2.38	3.22	3.09	0.32
2	2.41	3.25	3.13	0.30
3	2.40	3.26	3.16	0.29
4	2.44	3.30	3.07	0.30
5	2.38	3.19	3.19	0.30
6	2.42	3.26	3.13	0.32
7	2.36	3.18	3.04	0.29
8	2.37	3.20	3.09	0.30
9	2.46	3.34	3.11	0.29
10	2.44	3.30	3.05	0.31
11	2.41	3.25	3.04	0.31
12	2.43	3.26	3.21	0.30
13	2.37	3.22	3.18	0.29
14	2.39	3.26	3.05	0.30
15	2.42	3.23	3.31	0.30
16	2.38	3.20	3.22	0.30
17	2.43	3.27	3.24	0.29
18	2.46	3.30	3.33	0.31
19	2.39	3.23	3.02	0.30
<i>Average</i>	<i>2.41</i>	<i>3.25</i>	<i>3.17</i>	<i>0.30</i>


**Repeatability 1 LRT –Average Response Time (ms) Distribution Graph**

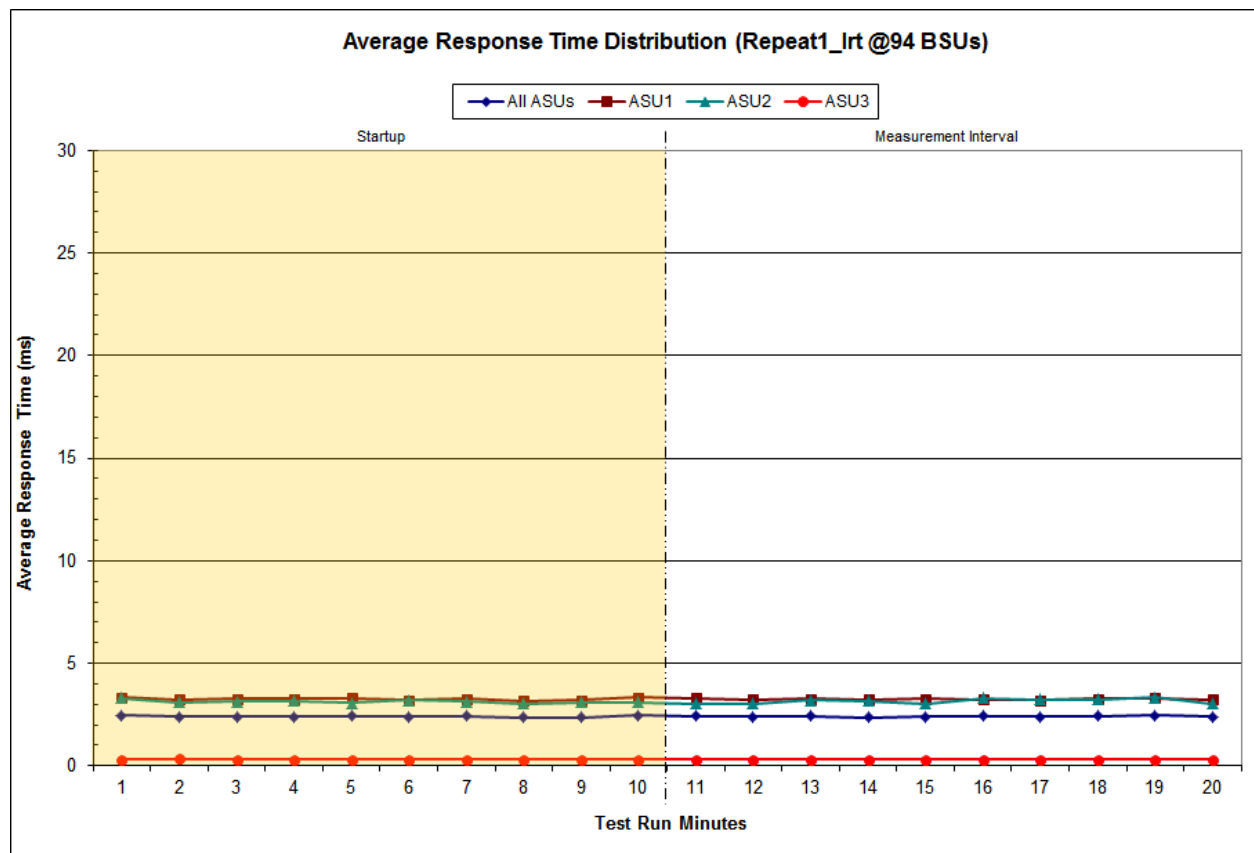

**Repeatability 1 IOPS – I/O Request Throughput Distribution Data**

940 BSUs	Start	Stop	Interval	Duration
<b>Start-Up/Ramp-Up</b>	22:23:54	22:33:54	0-9	0:10:00
<b>Measurement Interval</b>	22:33:54	22:43:54	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	4,695.43	2,792.40	582.33	1,320.70
1	4,688.13	2,795.33	569.08	1,323.72
2	4,706.77	2,803.37	581.53	1,321.87
3	4,695.22	2,799.02	577.52	1,318.68
4	4,706.13	2,813.30	578.10	1,314.73
5	4,689.53	2,792.07	580.25	1,317.22
6	4,706.63	2,799.83	574.65	1,332.15
7	4,699.05	2,801.43	577.40	1,320.22
8	4,697.35	2,798.23	577.43	1,321.68
9	4,708.00	2,807.02	575.38	1,325.60
10	4,696.55	2,804.27	582.68	1,309.60
11	4,678.12	2,796.83	578.53	1,302.75
12	4,696.18	2,796.92	578.05	1,321.22
13	4,701.87	2,806.45	579.48	1,315.93
14	4,706.30	2,802.98	579.60	1,323.72
15	4,692.12	2,799.48	579.93	1,312.70
16	4,694.27	2,792.67	578.40	1,323.20
17	4,682.43	2,789.33	575.62	1,317.48
18	4,687.22	2,788.32	577.60	1,321.30
19	4,691.40	2,796.00	579.05	1,316.35
<b>Average</b>	<b>4,692.65</b>	<b>2,797.33</b>	<b>578.90</b>	<b>1,316.43</b>


**Repeatability 1 IOPS – I/O Request Throughput Distribution Graph**

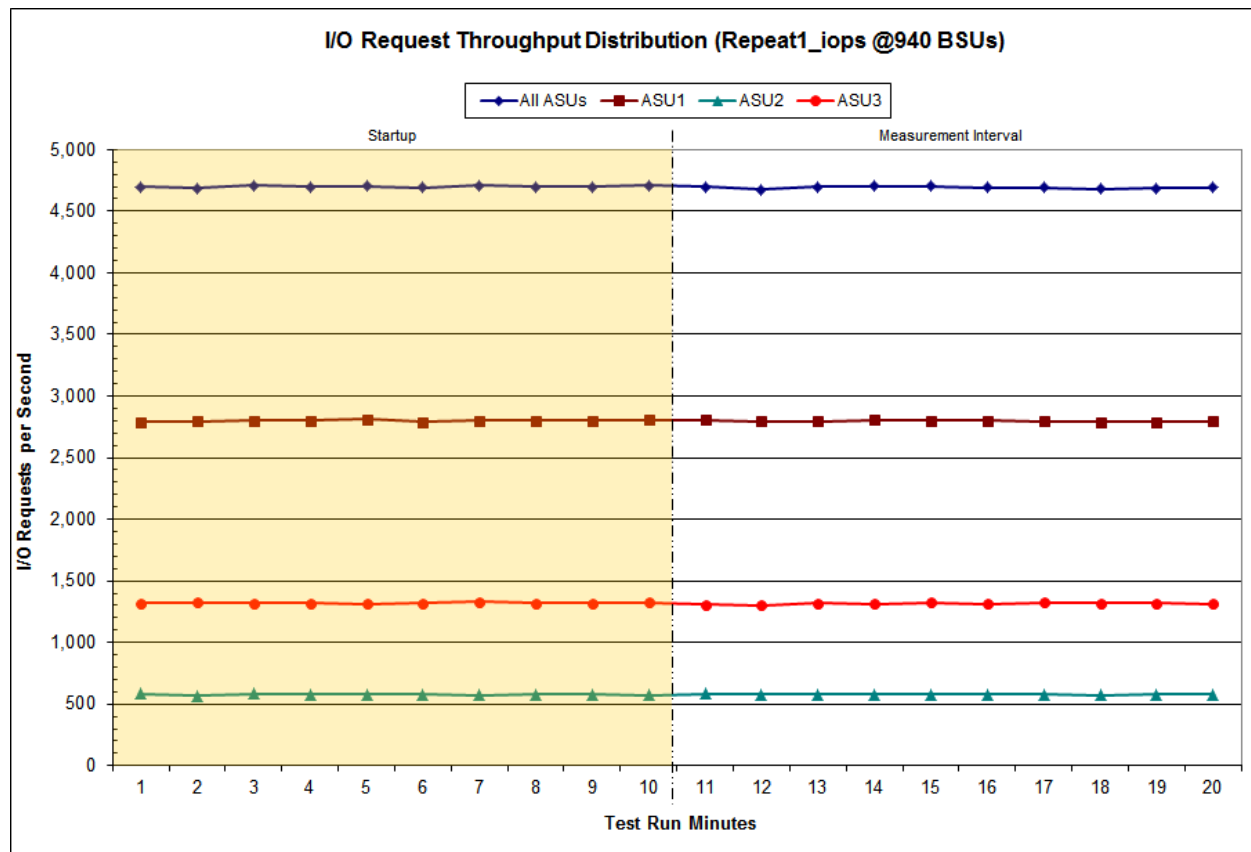

**Repeatability 1 IOPS –Average Response Time (ms) Distribution Data**

940 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:23:54	22:33:54	0-9	0:10:00
Measurement Interval	22:33:54	22:43:54	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	11.06	14.67	17.23	0.70
1	10.70	14.13	17.09	0.70
2	10.67	14.16	16.51	0.69
3	10.62	14.08	16.48	0.72
4	10.62	14.03	16.45	0.76
5	10.49	13.95	16.12	0.66
6	10.59	14.09	16.40	0.73
7	10.48	13.88	16.41	0.67
8	10.41	13.81	16.17	0.71
9	10.52	13.95	16.31	0.76
10	10.41	13.80	16.10	0.62
11	10.45	13.84	16.06	0.69
12	10.40	13.86	15.94	0.68
13	10.41	13.80	16.04	0.71
14	10.43	13.81	16.38	0.66
15	10.44	13.80	16.26	0.71
16	10.37	13.77	16.03	0.72
17	10.40	13.81	16.02	0.72
18	10.41	13.86	16.12	0.65
19	10.53	14.01	16.20	0.67
<b>Average</b>	<b>10.43</b>	<b>13.84</b>	<b>16.12</b>	<b>0.68</b>


**Repeatability 1 IOPS –Average Response Time (ms) Distribution Graph**

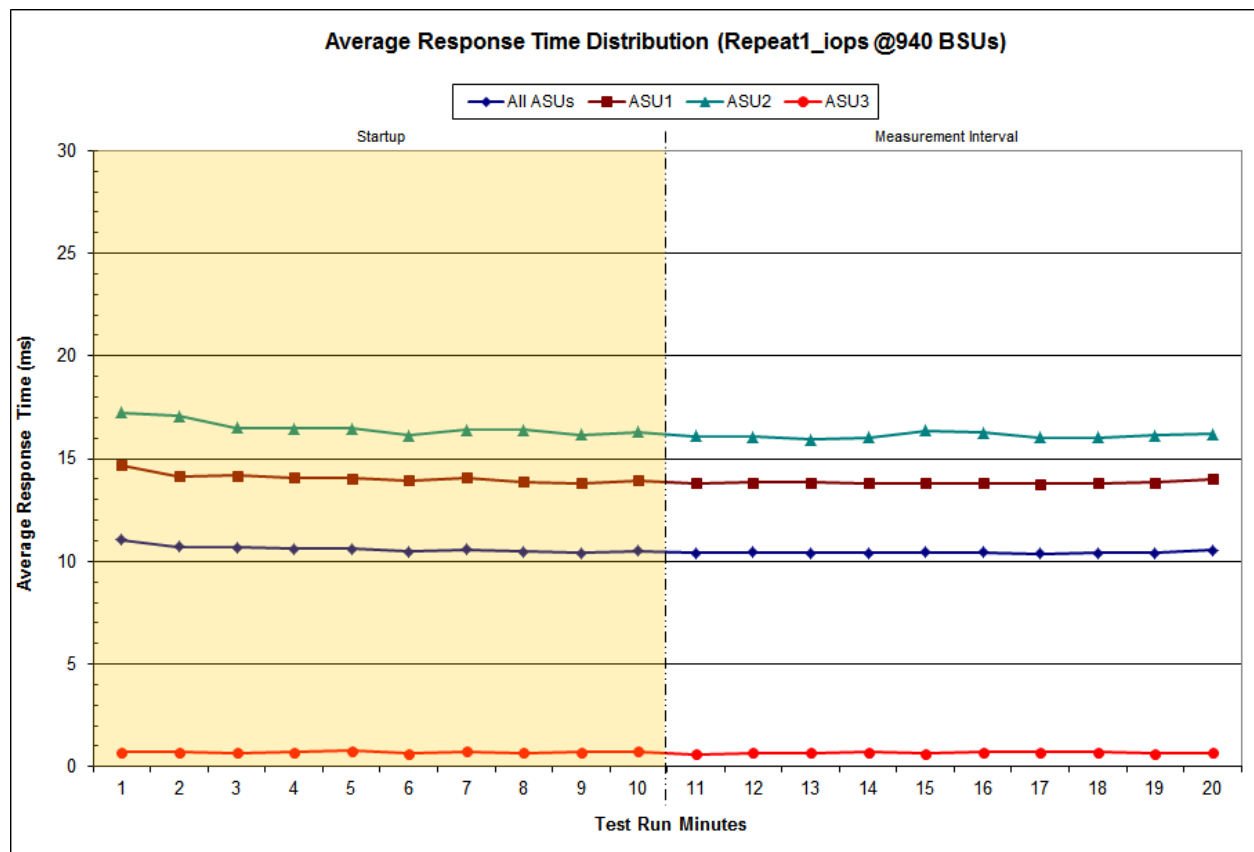

### Repeatability 2 LRT – I/O Request Throughput Distribution Data

94 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	22:43:57	22:53:57	0-9	0:10:00
Measurement Interval	22:53:57	23:03:57	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	470.50	280.12	58.58	131.80
1	469.17	281.08	57.30	130.78
2	465.58	278.33	56.03	131.22
3	470.20	279.48	58.97	131.75
4	473.85	281.98	60.45	131.42
5	466.65	277.50	58.07	131.08
6	472.53	279.70	58.85	133.98
7	470.60	282.95	56.02	131.63
8	471.20	279.03	57.95	134.22
9	473.75	280.68	57.55	135.52
10	465.62	276.67	58.78	130.17
11	473.33	282.33	58.72	132.28
12	473.30	282.62	59.28	131.40
13	472.10	281.72	59.37	131.02
14	471.85	281.07	58.60	132.18
15	474.07	281.00	59.17	133.90
16	472.50	279.75	58.52	134.23
17	471.73	281.93	57.20	132.60
18	469.38	280.50	57.87	131.02
19	466.03	275.90	58.22	131.92
<b>Average</b>	<b>470.99</b>	<b>280.35</b>	<b>58.57</b>	<b>132.07</b>

### Repeatability 2 LRT – I/O Request Throughput Distribution Graph

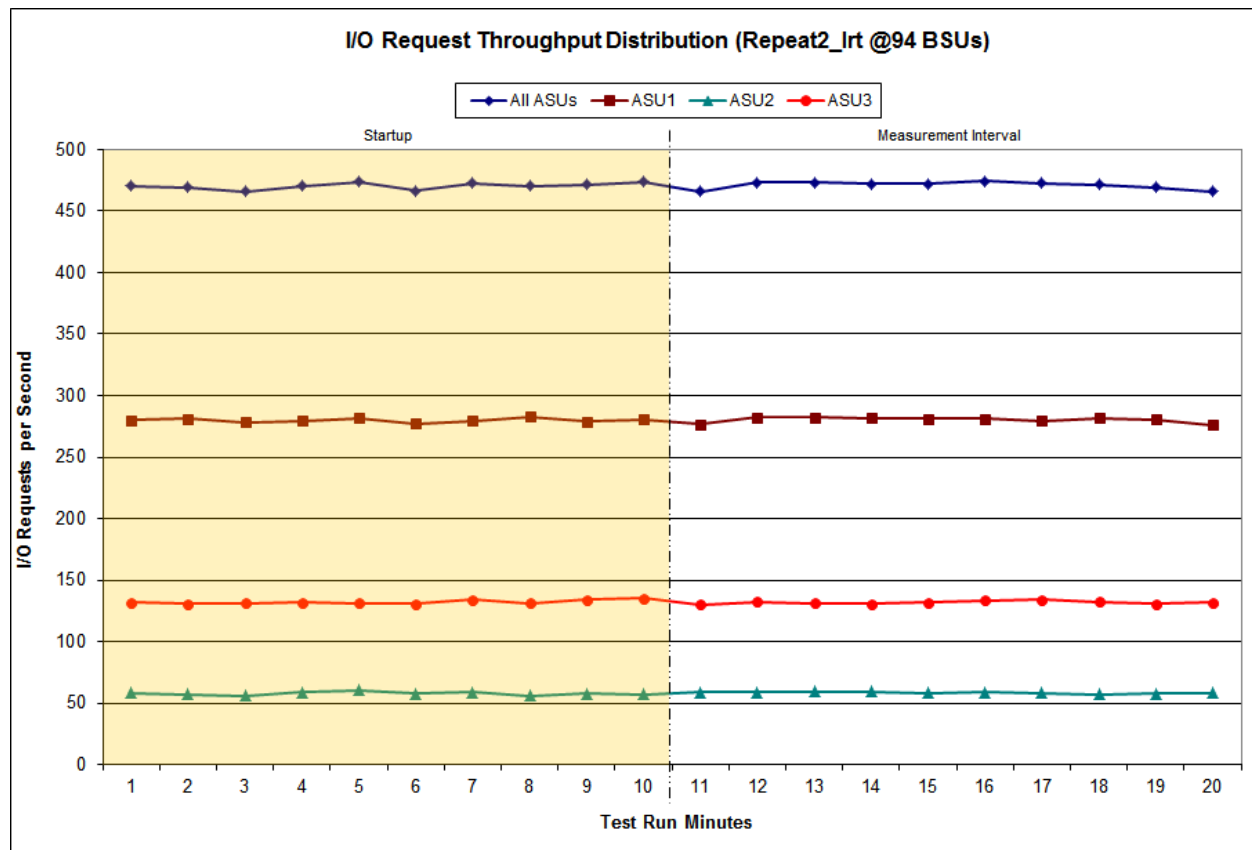




**Repeatability 2 LRT –Average Response Time (ms) Distribution Data**

94 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	22:43:57	22:53:57	0-9	0:10:00
<i>Measurement Interval</i>	22:53:57	23:03:57	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	2.54	3.43	3.28	0.31
1	2.41	3.27	3.05	0.31
2	2.40	3.24	3.15	0.30
3	2.41	3.26	3.13	0.30
4	2.45	3.30	3.13	0.30
5	2.42	3.29	3.02	0.29
6	2.36	3.19	3.18	0.29
7	2.42	3.26	3.16	0.29
8	2.41	3.28	3.14	0.30
9	2.44	3.33	3.09	0.30
10	2.44	3.25	3.31	0.31
11	2.36	3.19	3.03	0.29
12	2.43	3.31	2.96	0.29
13	2.40	3.25	3.02	0.29
14	2.41	3.29	2.99	0.30
15	2.43	3.27	3.26	0.30
16	2.33	3.17	2.94	0.31
17	2.40	3.25	3.07	0.31
18	2.43	3.27	3.12	0.30
19	2.44	3.31	3.15	0.29
<b>Average</b>	<b>2.41</b>	<b>3.26</b>	<b>3.09</b>	<b>0.30</b>


**Repeatability 2 LRT –Average Response Time (ms) Distribution Graph**

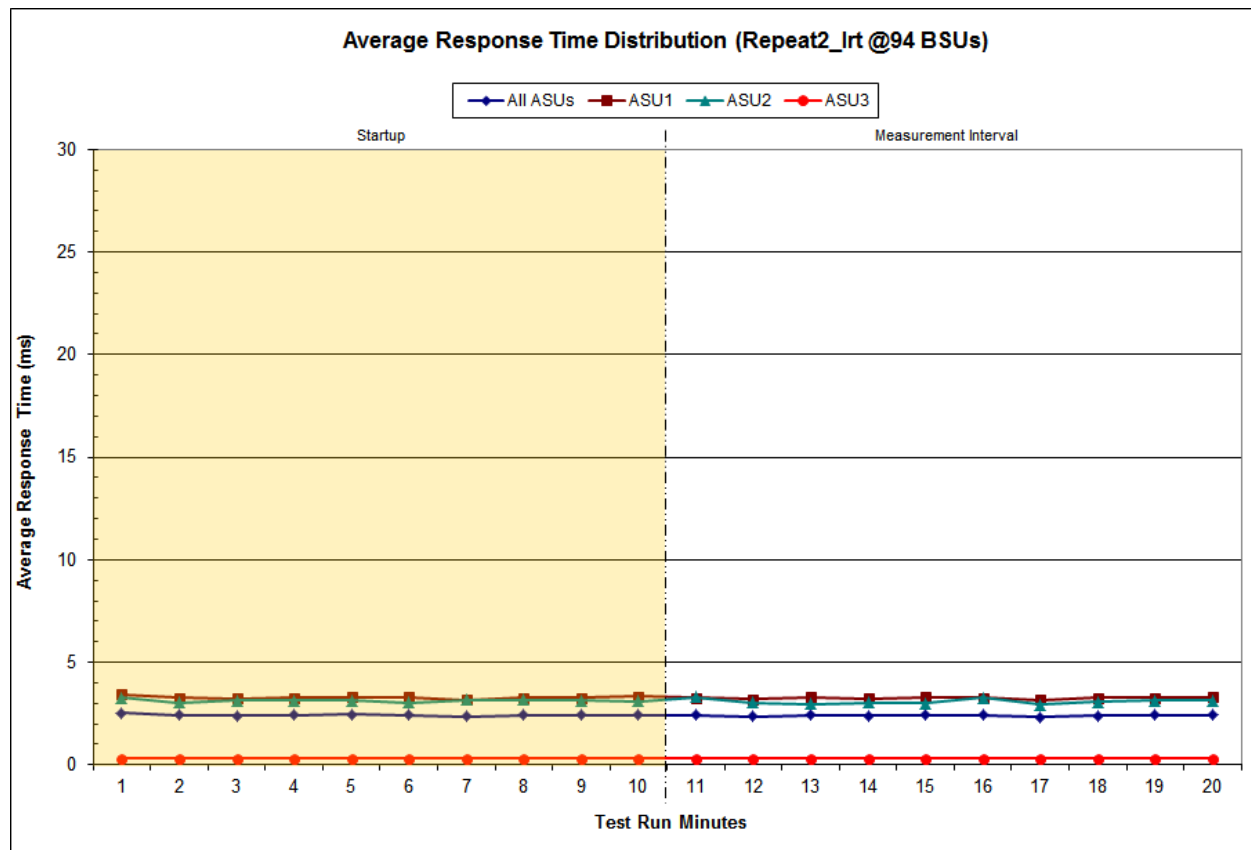

### Repeatability 2 IOPS – I/O Request Throughput Distribution Data

940 BSUs	Start	Stop	Interval	Duration
<i>Start-Up/Ramp-Up</i>	23:03:59	23:13:59	0-9	0:10:00
<i>Measurement Interval</i>	23:13:59	23:23:59	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	4,695.18	2,798.28	575.25	1,321.65
1	4,705.33	2,807.87	579.67	1,317.80
2	4,702.48	2,808.02	575.75	1,318.72
3	4,699.22	2,800.22	575.37	1,323.63
4	4,706.88	2,802.22	579.97	1,324.70
5	4,708.80	2,804.67	574.73	1,329.40
6	4,706.65	2,796.55	580.65	1,329.45
7	4,690.50	2,790.57	575.20	1,324.73
8	4,695.07	2,791.47	580.97	1,322.63
9	4,696.38	2,806.85	571.83	1,317.70
10	4,699.70	2,797.62	581.65	1,320.43
11	4,690.48	2,794.27	579.22	1,317.00
12	4,699.33	2,808.72	570.27	1,320.35
13	4,701.30	2,798.92	580.37	1,322.02
14	4,700.62	2,799.78	583.47	1,317.37
15	4,693.97	2,796.55	578.88	1,318.53
16	4,695.65	2,799.70	574.67	1,321.28
17	4,698.85	2,801.20	575.48	1,322.17
18	4,708.23	2,810.83	579.62	1,317.78
19	4,695.95	2,794.53	579.83	1,321.58
<b>Average</b>	<b>4,698.41</b>	<b>2,800.21</b>	<b>578.35</b>	<b>1,319.85</b>


### Repeatability 2 IOPS – I/O Request Throughput Distribution Graph

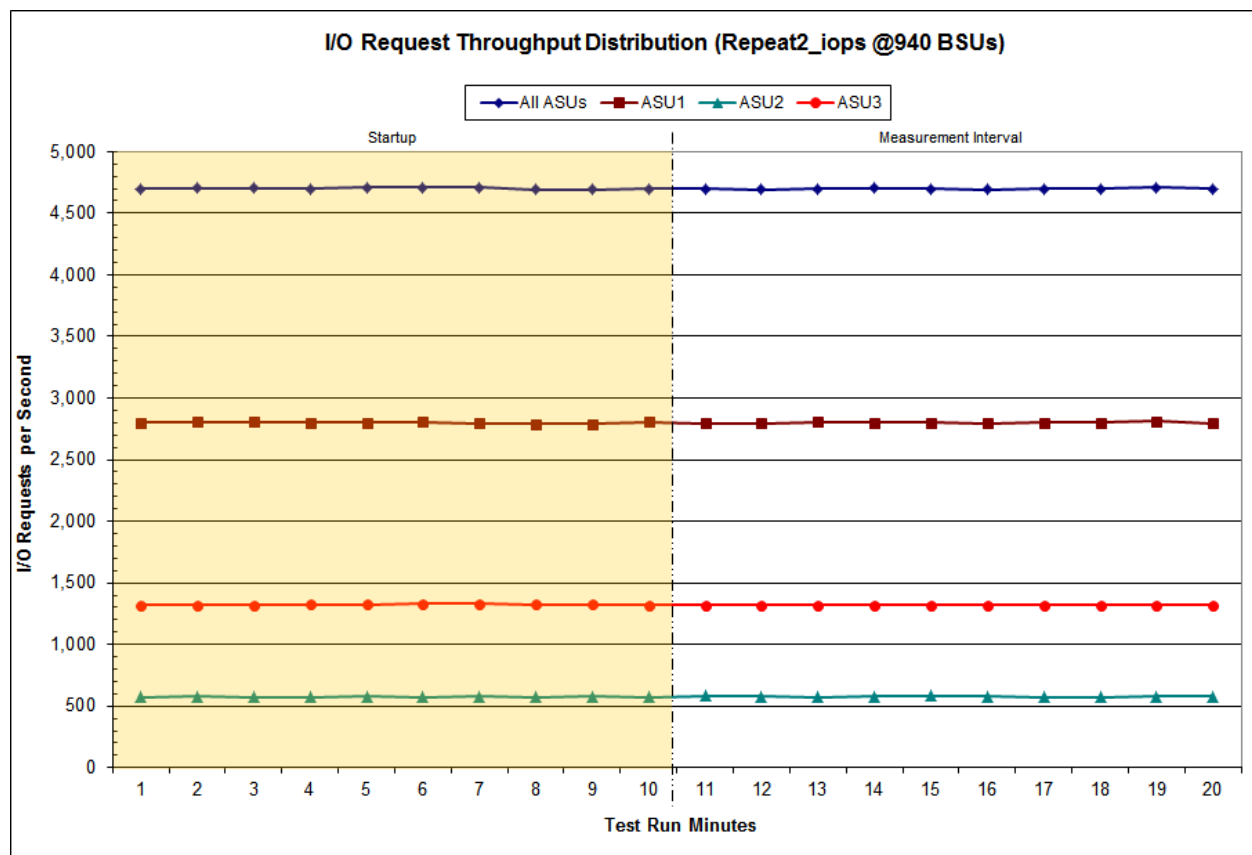

**Repeatability 2 IOPS –Average Response Time (ms) Distribution Data**

940 BSUs	Start	Stop	Interval	Duration
Start-Up/Ramp-Up	23:03:59	23:13:59	0-9	0:10:00
Measurement Interval	23:13:59	23:23:59	10-19	0:10:00
60 second intervals	All ASUs	ASU1	ASU2	ASU3
0	11.01	14.57	17.37	0.72
1	10.67	14.12	16.66	0.68
2	10.55	13.99	16.47	0.66
3	10.50	13.93	16.33	0.69
4	10.49	13.91	16.37	0.67
5	10.42	13.88	16.20	0.64
6	10.43	13.90	16.11	0.66
7	10.37	13.82	15.98	0.66
8	10.44	13.87	16.21	0.66
9	10.38	13.76	16.30	0.62
10	10.38	13.85	15.76	0.64
11	10.43	13.81	16.29	0.69
12	10.38	13.80	15.98	0.67
13	10.41	13.85	15.95	0.68
14	10.35	13.82	15.59	0.66
15	10.41	13.83	16.04	0.69
16	10.64	14.07	16.53	0.81
17	10.43	13.86	16.15	0.67
18	10.45	13.84	16.27	0.66
19	10.54	14.03	16.13	0.71
<b>Average</b>	<b>10.44</b>	<b>13.88</b>	<b>16.07</b>	<b>0.69</b>

**Repeatability 2 IOPS –Average Response Time (ms) Distribution Graph**

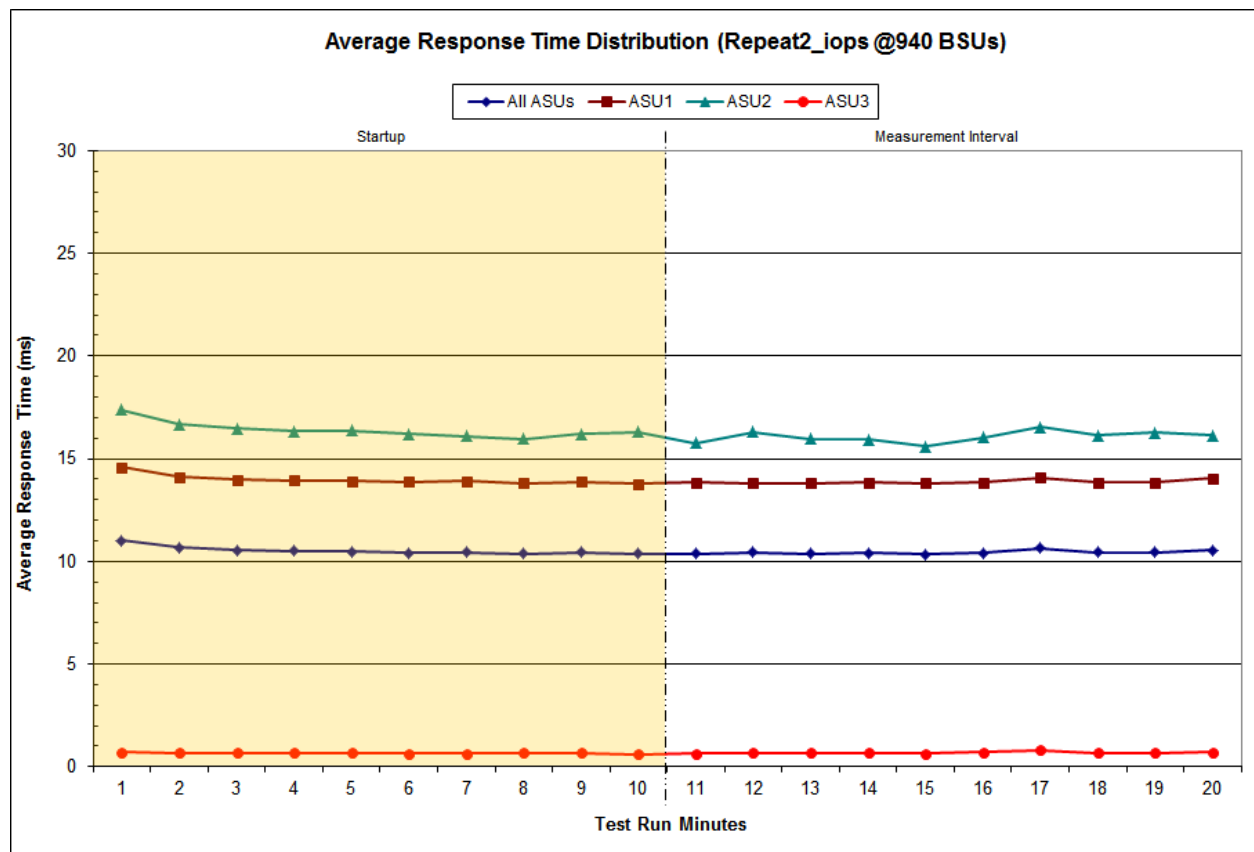

**Repeatability 1 (LRT)**  
**Measured Intensity Multiplier and Coefficient of Variation**

Clause 3.4.3

**IM – Intensity Multiplier:** The ratio of I/Os for each I/O stream relative to the total I/Os for all I/O streams (ASU1-1 – ASU3-1) as required by the benchmark specification.

Clauses 6.1.10

**MIM – Measured Intensity Multiplier:** The Measured Intensity Multiplier represents the ratio of measured I/Os for each I/O stream relative to the total I/Os measured for all I/O streams (ASU1-1 – ASU3-1).

Clause 6.3.14.3

**COV – Coefficient of Variation:** This measure of variation for the Measured Intensity Multiplier cannot exceed 0.5.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	<b>0.0350</b>	<b>0.2810</b>	<b>0.0700</b>	<b>0.2100</b>	<b>0.0180</b>	<b>0.0700</b>	<b>0.0350</b>	<b>0.2810</b>
MIM	0.0346	0.2815	0.0695	0.2110	0.0180	0.0701	0.0348	0.2805
COV	0.029	0.009	0.024	0.014	0.059	0.016	0.038	0.013

**Repeatability 1 (IOPS)**  
**Measured Intensity Multiplier and Coefficient of Variation**

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	<b>0.0350</b>	<b>0.2810</b>	<b>0.0700</b>	<b>0.2100</b>	<b>0.0180</b>	<b>0.0700</b>	<b>0.0350</b>	<b>0.2810</b>
MIM	0.0348	0.2811	0.0702	0.2101	0.0180	0.0704	0.0350	0.2805
COV	0.009	0.002	0.007	0.004	0.014	0.006	0.011	0.004

**Repeatability 2 (LRT)**  
**Measured Intensity Multiplier and Coefficient of Variation**

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>IM</b>	<b>0.0350</b>	<b>0.2810</b>	<b>0.0700</b>	<b>0.2100</b>	<b>0.0180</b>	<b>0.0700</b>	<b>0.0350</b>	<b>0.2810</b>
MIM	0.0350	0.2812	0.0692	0.2099	0.0181	0.0710	0.0353	0.2804
COV	0.035	0.007	0.020	0.011	0.025	0.018	0.027	0.008

**Repeatability 2 (IOPS)**  
**Measured Intensity Multiplier and Coefficient of Variation**

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<i>IM</i>	<i>0.0350</i>	<i>0.2810</i>	<i>0.0700</i>	<i>0.2100</i>	<i>0.0180</i>	<i>0.0700</i>	<i>0.0350</i>	<i>0.2810</i>
MIM	0.0348	0.2811	0.0698	0.2103	0.0180	0.0702	0.0349	0.2809
COV	0.005	0.003	0.005	0.002	0.021	0.011	0.008	0.002

## Data Persistence Test

### Clause 7

*The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):*

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

*The SPC-1C Workload Generator will write 16 block I/O requests at random over the total Addressable Storage Capacity of the TSC for ten (10) minutes at a minimum of 25% of the load used to generate the SPC-1C IOPS™ primary metric. The bit pattern selected to be written to each block as well as the address of the block will be retained in a log file.*

*The Tested Storage Configuration will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.*

*The SPC-1C Workload Generator will then use the above log file to verify each block written contains the correct bit pattern.*

### Clause 10.4.8.6

*The FDR shall contain the following for the Data Persistence Test:*

1. *A listing of the SPC-1C Workload Generator commands and parameters used to execute each of the Test Runs in the Persistence Test.*
2. *The human readable SPC-1C Test Results File for each of the Test Runs in the Data Persistence Test.*
3. *A table from the successful Persistence Test, which contains the results from the test.*

## SPC-1C Workload Generator Input Parameters

The SPC-1C Workload Generator input parameters for the Sustainability, IOPS, Response Time Ramp, Repeatability, and Persistence Test Runs are documented in [Appendix E: SPC-1C Workload Generator Input Parameters](#) on Page [65](#).

## Data Persistence Test Results File

A link to each test result file generated from each Data Persistence Test is listed below.

[Persistence 1 Test Results File](#)

[Persistence 2 Test Results File](#)

### Data Persistence Test Results

<b>Data Persistence Test Results</b>	
Data Persistence Test Run Number: 1	
Total Number of Logical Blocks Written	11,279,776
Total Number of Logical Blocks Verified	11,018,912
Total Number of Logical Blocks that Failed Verification	0
Time Duration for Writing Test Logical Blocks	10 minutes
Size in bytes of each Logical Block	512
Number of Failed I/O Requests in the process of the Test	0

In some cases the same address was the target of multiple writes, which resulted in more Logical Blocks Written than Logical Blocks Verified. In the case of multiple writes to the same address, the pattern written and verified must be associated with the last write to that address.

## **PRICED STORAGE CONFIGURATION AVAILABILITY DATE**

### **Clause 10.4.9**

*The committed delivery date for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date must be the date at which all components are committed to be available. All availability dates, whether for individual components or for the Priced Storage Configuration as a whole, must be disclosed to a precision of one day.*

*The Availability Date shall be stated in the FDR by either a combination of specific alphanumeric month, numeric day, and numeric year or as "Currently Available" in the case where all components that comprise the Priced Storage Configuration are currently available for customer order and shipment.*

The Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065 as documented in this Full Disclosure Report is currently available for customer purchase and shipment.

## **PRICING INFORMATION**

### **Clause 10.4.5.6**

*The Executive Summary shall contain a pricing spreadsheet as documented in Clause 9.3.1.*

Pricing information may be found in the Priced Storage Configuration Pricing section on page 16.

## **TESTED STORAGE CONFIGURATION (TSC) AND PRICED STORAGE CONFIGURATION DIFFERENCES**

### **Clause 10.4.5.8**

*The Executive Summary shall contain a list of all differences between the Tested Storage Configuration (TSC) and the Priced Storage Configuration.*

A list of all differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration may be found in the Executive Summary portion of this document on page 16.

## **ANOMALIES OR IRREGULARITIES**

### **Clause 10.4.10**

*The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-1C benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in the FDR.*

There were no anomalies or irregularities encountered during the SPC-1C Remote Audit of the Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065.



## **APPENDIX A: SPC-1C GLOSSARY**

### “Decimal” (*powers of ten*) Measurement Units

In the storage industry, the terms “kilo”, “mega”, “giga”, “tera”, “peta”, and “exa” are commonly used prefixes for computing performance and capacity. For the purposes of the SPC workload definitions, all of the following terms are defined in “powers of ten” measurement units.

A kilobyte (KB) is equal to 1,000 ( $10^3$ ) bytes.

A megabyte (MB) is equal to 1,000,000 ( $10^6$ ) bytes.

A gigabyte (GB) is equal to 1,000,000,000 ( $10^9$ ) bytes.

A terabyte (TB) is equal to 1,000,000,000,000 ( $10^{12}$ ) bytes.

A petabyte (PB) is equal to 1,000,000,000,000,000 ( $10^{15}$ ) bytes

An exabyte (EB) is equal to 1,000,000,000,000,000,000 ( $10^{18}$ ) bytes

### “Binary” (*powers of two*) Measurement Units

The sizes reported by many operating system components use “powers of two” measurement units rather than “power of ten” units. The following standardized definitions and terms are also valid and may be used in this document.

A kibibyte (KiB) is equal to 1,024 ( $2^{10}$ ) bytes.

A mebibyte (MiB) is equal to 1,048,576 ( $2^{20}$ ) bytes.

A gibibyte (GiB) is equal to 1,073,741,824 ( $2^{30}$ ) bytes.

A tebibyte (TiB) is equal to 1,099,511,627,776 ( $2^{40}$ ) bytes.

A pebibyte (PiB) is equal to 1,125,899,906,842,624 ( $2^{50}$ ) bytes.

An exbibyte (EiB) is equal to 1,152,921,504,606,846,967 ( $2^{60}$ ) bytes.

## **SPC-1C Data Repository Definitions**

**Total ASU Capacity:** The total storage capacity read and written in the course of executing the SPC-1C benchmark.

**Application Storage Unit (ASU):** The logical interface between the storage and SPC-1C Workload Generator. The three ASUs (Data, User, and Log) are typically implemented on one or more Logical Volume.

**Logical Volume:** The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-1C benchmark. Each Logical Volume is implemented as a single, contiguous address space.

**Addressable Storage Capacity:** The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-1C Workload Generator.

**Configured Storage Capacity:** This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

**Physical Storage Capacity:** The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

**Data Protection Overhead:** The storage capacity required to implement the selected level of data protection.

**Required Storage:** The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the three ASUs.

**Global Storage Overhead:** The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

**Total Unused Storage:** The amount of storage capacity available for use by application programs but not included in the Total ASU Capacity.

## SPC-1C Data Protection Levels

**Protected 1:** The single point of failure of any *storage device* in the configuration will not result in permanent loss of access to or integrity of the SPC-1C Data Repository.

**Protected 2:** The single point of failure of any *component* in the configuration will not result in permanent loss of access to or integrity of the SPC-1C Data Repository.

**Unprotected:** The Test Sponsor asserts no claim of data protection in the event of a single point of failure.

## SPC-1C Test Execution Definitions

**Average Response Time:** The sum of the Response Times for all Measured I/O Requests divided by the total number of Measured I/O Requests.

**Completed I/O Request:** An I/O Request with a Start Time and a Completion Time (see “I/O Completion Types” below).

**Completion Time:** The time recorded by the Workload Generator when an I/O Request is satisfied by the TSC as signaled by System Software.

**Data Rate:** The data transferred in all Measured I/O Requests in an SPC-1C Test Run divided by the length of the Test Run in seconds.

**Expected I/O Count:** For any given I/O Stream and Test Phase, the product of 50 times the BSU level, the duration of the Test Phase in seconds, and the Intensity Multiplier for that I/O Stream.

**Failed I/O Request:** Any I/O Request issued by the Workload Generator that could not be completed or was signaled as failed by System Software. A Failed I/O Request has no Completion Time (see “I/O Completion Types” below).

**I/O Request Throughput:** The total number of Measured I/O requests in an SPC-1C Test Run divided by the duration of the Measurement Interval in seconds.

**In-Flight I/O Request:** An I/O Request issued by the I/O Command Generator to the TSC that has a recorded Start Time, but does not complete within the Measurement Interval (see “I/O Completion Types” below).

**Measured I/O Request:** A Completed I/O Request with a Completion Time occurring within the Measurement Interval (see “I/O Completion Types” below).

**Measured Intensity Multiplier:** The percentage of all Measured I/O Requests that were issued by a given I/O Stream.

**Measurement Interval:** The finite and contiguous time period, after the TSC has reached Steady State, when data is collected by a Test Sponsor to generate an SPC-1C test result or support an SPC-1C test result.

**Ramp-Up:** The time required for the Benchmark Configuration (BC) to produce Steady State throughput after the Workload Generator begins submitting I/O Requests to the TSC for execution.

**Ramp-Down:** The time required for the BC to complete all I/O Requests issued by the Workload Generator. The Ramp-Down period begins when the Workload Generator ceases to issue new I/O Requests to the TSC.

**Response Time:** The Response Time of a Measured I/O Request is its Completion Time minus its Start Time.

**Start Time:** The time recorded by the Workload Generator when an I/O Request is submitted, by the Workload Generator, to the System Software for execution on the Tested Storage Configuration (TSC).

**Start-Up:** The period that begins after the Workload Generator starts to submit I/O requests to the TSC and ends at the beginning of the Measurement Interval.

**Shut-Down:** The period between the end of the Measurement Interval and the time when all I/O Requests issued by the Workload Generator have completed or failed.

**Steady State:** The consistent and sustainable throughput of the TSC. During this period the load presented to the TSC by the Workload Generator is constant.


**Test:** A collection of Test Phases and or Test Runs sharing a common objective.

**Test Run:** The execution of SPC-1C for the purpose of producing or supporting an SPC-1C test result. SPC-1C Test Runs may have a finite and measured Ramp-Up period, Start-Up


period, Shut-Down period, and Ramp-Down period as illustrated in the “SPC-1C Test Run Components” below. All SPC-1C Test Runs shall have a Steady State period and a Measurement Interval.

**Test Phase:** A collection of one or more SPC-1C Test Runs sharing a common objective and intended to be run in a specific sequence.

### I/O Completion Types

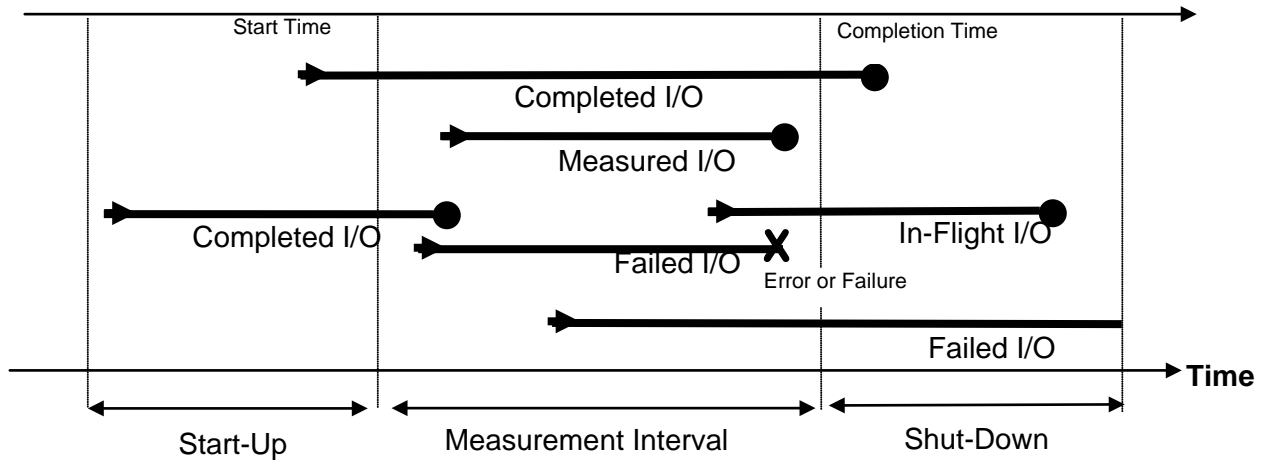

### SPC-1C Test Run Components

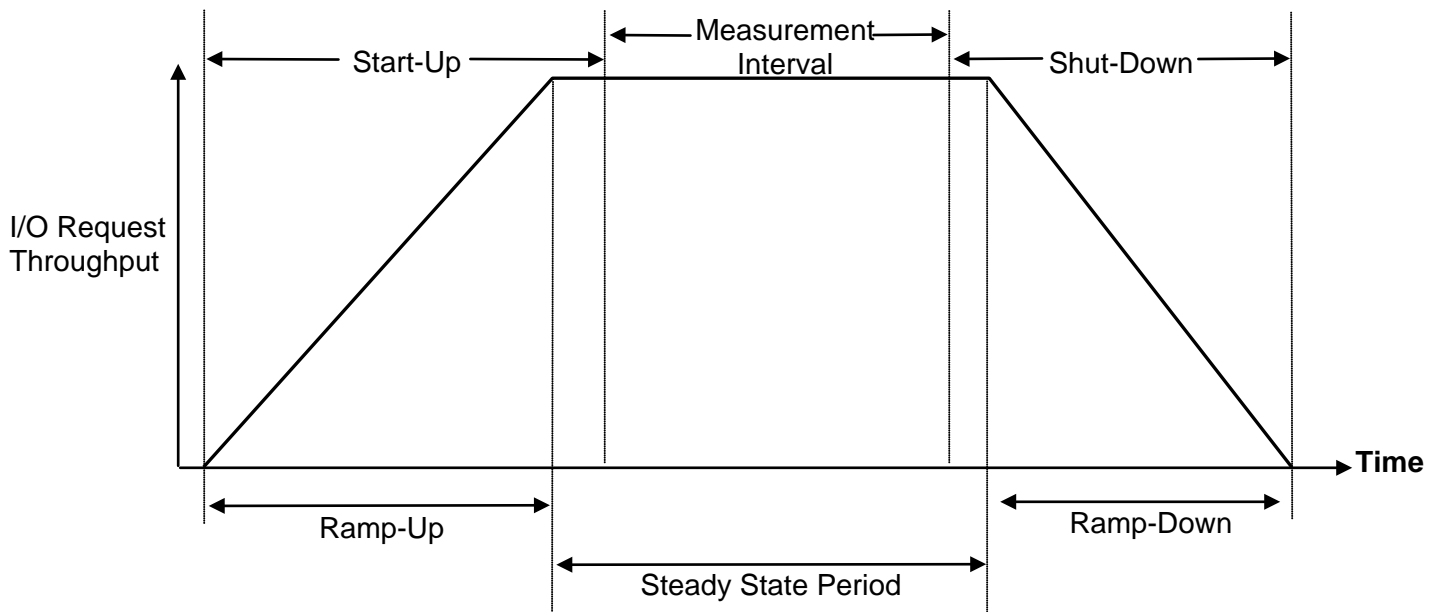

## **APPENDIX B: CUSTOMER TUNABLE PARAMETERS AND OPTIONS**

The customer tunable parameters and options that were changed for the benchmark measurements are documented in the [Change Parameters](#) section of [Appendix C: Tested Storage Configuration \(TSC\) Creation](#) on page [63](#).

## **APPENDIX C: TESTED STORAGE CONFIGURATION (TSC) CREATION**

### **Create RAID-10 Array**

Download the MegaRAID **StorCLI** utility from the following URL:

<http://www.lsi.com/support>

Execute the following script from the Host System, without any parameters, to create a RAID-10 array.

#### **RB.cmd**

```
echo off
REM *****Clear All *****
StorCLI64 -cfgclr -aALL
REM
REM Phys HDD List : 0,1,2,3 etc
REM Spares : NO
REM RAID Level : 10
REM Stripe Size : 1MB
REM *****
REM enclosure #
set e=76
REM
REM ***** Create RAID 10 *****
set level=10
set stripe=1024
@echo on
StorCli64 /c0 add vd type=raid%level% drives=%e%:1-24 PDperArray=4 WT direct
strip=%stripe%
```

### **Create SPC-1C Logical Volumes**

Invoke the Windows **DiskPart** command line utility, from a Windows command session, with the following command, which will execute the commands in **diskmk.txt** to create the three SPC-1C Logical Volumes.

```
diskpart /s diskmk.txt
```

#### **diskmk.txt**

```
select disk 1
clean
convert gpt
create partition primary size=3087696 align=1024
create partition primary size=3087696 align=1024
create partition primary size=686154 align=1024
exit
```

## Change Parameters

Execute the following StorCLI script, without any parameters, from the Host System to create a change the appropriate user tunable parameter/options.

### TuneParms.cmd

```
REM abort any background Initialization
storcli64 /c0/vall stop bgi
storcli64 /c0/vall set autobgi=off
REM

REM Enables automatic load balancing between SAS phys or ports in a wide port
configuration
storcli64 /c0 set loadbalancemode=on

REM Enable WriteBack Always
storcli64 /c0/vall set wrcache=WT

REM disable Diskcache
storcli64 /c0/vall set pdcache=off

REM disable background Patrol Read is designed to detect media defect
storcli64 /c0 set patrolread=off

REM disable background consistency check
storcli64 /c0 set cc=off

REM set smart attributes polling to 65535 seconds
storcli64 /c0 set smartpollinterval=65535

REM RAID controller Tuned to provide least latency
storcli64 /c0 set perfmode=1
```

## **APPENDIX D: SPC-1C WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETERS**

### **ASU Pre-Fill**

The content of command and parameter file, used in this benchmark to execute the required ASU pre-fill, is listed below.

```
*
compratio=1
sd=default,threads=4
sd=sd1,lun=\\.x:,size=3087696M
sd=sd2,lun=\\.y:,size=3087696M
sd=sd3,lun=\\.z:,size=686154M

*
wd=wd1,sd=sd1,rdpct=0,seek=-1,xfersize=1M
wd=wd2,sd=sd2,rdpct=0,seek=-1,xfersize=1M
wd=wd3,sd=sd3,rdpct=0,seek=-1,xfersize=1M
*=====
* Use 10 hours as a max elapse time
*=====
*
*
rd=Prefill_ASUs,wd=wd*,iorate=max,elapsed=36000,interval=30
```

### **Primary Metrics Test, Repeatability and Persistence Tests**

The content of SPC-1C Workload Generator command and parameter file, used in this benchmark to execute the Primary Metrics, Repeatability and Persistence Tests, is listed below.

```
sd=asu1_1,lun=\\.x:
sd=asu2_1,lun=\\.y:
sd=asu3_1,lun=\\.z:
```



## **APPENDIX E: SPC-1C WORKLOAD GENERATOR INPUT PARAMETERS**

### **Primary Metrics, Repeatability and Persistence Tests**

The following script was used to execute the required ASU Pre-Fill, Primary Metrics Test (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*), Repeatability Test (*Repeatability Test Phase 1 and Repeatability Test Phase 2*), and SPC-1C Persistence Test Run 1 (*write phase*) in an uninterrupted sequence.

The script will pause after execution of the SPC-1C Persistence Test Run 1 (*write phase*) to allow the required TSC power off/power on cycle. After the TSC has been powered back on, the script will be directed to resume execution and perform the SPC-1C Persistence Test Run 2 (*read phase*).

```
rem spc-rem prefill
cd c:\vdbench
call vdbench -f prefill.txt -o Prefill_ST600MP0065
cd c:\spc\spc1c
rem
rem spc-1c
rem
set /a bsu=940
set java=c:\java\jre7\bin\java
echo
%java% -Xmx512m -Xms512m metrics -b %bsu% -t 28800 -s 600:600 -r 600
%java% -Xmx512m -Xms512m repeat1 -b %bsu% -t 600 -s 600
%java% -Xmx512m -Xms512m repeat2 -b %bsu% -t 600 -s 600
%java% -Xmx512m -Xms512m persist1 -b %bsu%
echo power cycle device then execute java -Xmx1g -Xss128k -Xms128m persist2
pause
REM %java% -Xmx512m -Xms512m persist2
```

## APPENDIX F: THIRD-PARTY QUOTATIONS

### Storage Enclosure

**dataON** Better Storage • Agile Solution

LOGIN | REGISTER  
Contact Us: 1.877.512.0432 search...

DNS-1640 2U-24 bay 6G 2.5" SAS/SATA JBOD

Product Solution CiB Maxanta Server 2012 Partners Resource Support About US

# DNS-1640

high-performance  
green storage

Windows Server 2012 Certified

This is replacement for DNS-1620

Introducing the newest addition to the DataON Product line the DNS-1640 (JBOD) Storage enclosure. The DNS-1640 is the core foundation for a Enterprise-Class, high performance, scalable and reliable 2.5" HDD & SSD storage solution.

Designed to meet the needs of continuing data growth, reliability and energy efficiency. DNS-1640 supports a "Start Small Grow Big" strategy by enabling users to connect DNS-1640 with DataON's Technology Partners HBA's for scalable storage.

DataON's expansion enclosure's are managed by the RAID controller or HBA in the primary server, they give IT administrators a cost-effective alternative to quickly respond to your demanding storage requirements.

DNS-1640 is the next generation storage enclosure to expand & scale your storage capacity beyond the server & maximize storage density, performance and power efficiency.

**Features**

- 2U 24-bay 2.5" 6Gb/s SAS & SATA HDDs or SSDs
- Redundant Hot Swap Drive Bays, Power & Cooling Module
- LED activity in Each Drive Carrier
- Single or Dual I/O Controller for Redundant and Max Availability
- Three SFF-8088 6Gb/s SAS host and expansion connections
- Supports up to 2,400 MB/sec bandwidth per I/O controller

**Advantages**

- High Performance, Flexible & Scalable Storage
- Fully Tested and Qualified for 6Gb/s SAS RAID & HBAs
- Point to Point SAS connectivity for Ultimate Performance
- Daisy Chain Expansion for additional DNS-1640
- Plug & Play Increase Capacity without shutting down
- Green Energy Efficient

**Applications**

- Audio and Video Post-Production
- Medical & Space Telescope Imaging
- High-Performance Computing
- Digital Content Archive & VTL
- File, Web, Database and E-mail Servers
- Online transaction processing (OLTP)

Model#	SAS I/O	Drive Bay	Drive Size	MSRP
<b>DNS-1640D</b>	Dual	24	2.5"	\$4,295.00
<b>DNS-1640S</b>	Single	24	2.5"	\$3,895.00

Tags: 2.5 SAS JBOD 24 Bay 2U Cache Storage Cost Effective FastPath Storage Green Storage High Performance High Scalable Hot Swap

Copyright © 2009-2013 DataON Storage. All rights reserved.

## LSI MegaRAID Controller

PROVANTAGE: LSI Logic LSI00416 The Four-Port Megaraid...

http://www.provantage.com/lsi-logic-lsi00416~7LSIG0TP.htm?...

**PROVANTAGE**® *Your World of Technology!*  
www.provantage.com - 800-336-1166  
USA - 330-494-8715 International

LSI Logic LSI00416 The Four-Port Megaraid SAS 9361-8I, Powered By The LSISAS3108 Dual-Core Roc

**Storage**  
**I/O and Storage Controllers**  
**Various I/O and Storage Controllers**



**LSI Logic** **SAVE 19%**  
**The Four-Port Megaraid SAS 9361-8I, Powered By The LSISAS3108 Dual-Core Roc**

Only **\$592.55**  
Mfr List **\$735.00**  
Save \$142.45 (19%)

**Add to Cart**

16 In Stock  
+ Add to Wish List  
+ Compare Features  
Share This

**100% SATISFACTION GUARANTEED!**

Manufacturer Part# LSI00416  
UPC Code: 830343003068

- ▶ Product Type: SAS Controller
- ▶ Form Factor: Plug-in Card
- ▶ Host Interface: PCI Express 3.0 x8
- ▶ Product Model: 9361-8I
- ▶ Total Number of SAS Ports: 8

100% Satisfaction Guaranteed LSI0TP


**Larger Images:** 

**Overview (17) Specifications Availability Accessories Reviews**

**The Four-Port Megaraid SAS 9361-8I, Powered By the LSISAS3108 Dual-Core Roc, Includes the Latest PCIe 3.0 And 12GB/S SAS Technology And Helps Users to Support Increased Scaling Of HDDS And Maximize the Performance Benefits Of SSDS**

**Manufacturer Part Number: LSI00416**

**SAS Cables**



**16781 Noyes Ave.  
Irvine, CA 92606  
(949) 475-9100  
Fax: (949) 475-9119**

Seagate Technology  
1280 Disc Drive  
Shakopee, MN 55379

Invoice	Date	Page
1731	09/05/14	1

# invoice

Bill to: Ship to:

Attn: [REDACTED]

Buyer	Phone #
Joey Chanthalakeo	(952) 402-2558

Sales Code: 15

Customer P.O.	Order Date	Tax	Terms	Ship Via	F.O.B.	Ship Date	Customer #
VERBAL	09/05/14	N	CCARD	UPS	IRVINE	09/05/14	290820

Quantity Ordered	B/O	Shipped	Description	Unit Price	Total
1	0	1	HD-SAS-4388/1M	56.50	56.50
			9/5 KM		

This invoice is subject to a FINANCE CHARGE of .05% PER DAY PAST DUE. THIS IS AN ANNUAL INTEREST RATE OF 18%.

The following is made lieu of all warranties, expressed or implied: Seller's only obligation shall be to replace such quantity of the product proved to be defective at time of shipment. Seller shall not be liable for any injury, loss, or damage, direct or consequential, arising out of the use of, or inability to use, the product. The user shall determine the suitability of the product for his/her intended use, and user assumes all risk and liability whatsoever in connection therewith.

1#

1Z9368400346236996

**ORIGINAL**

Subtotal	56.50
Sales Tax	
Freight	8.12
Handling	
<b>TOTAL</b>	<b>64.62</b>