



**SPC BENCHMARK 2C™  
EXECUTIVE SUMMARY**

**SEAGATE TECHNOLOGY LLC** (*TEST SPONSOR*)  
**SAMSUNG SPINPOINT F1 HD103UJ**

**SPC-2C™ V1.1**

**Submitted for Review: October 15, 2008**

**Submission Identifier: D00004**

**Revised: October 16, 2008**

## **EXECUTIVE SUMMARY**

### **Test Sponsor and Contact Information**

<b>Test Sponsor and Contact Information</b>	
<b>Test Sponsor Primary Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Craig Parris – <a href="mailto:Craig.Parris@seagate.com">Craig.Parris@seagate.com</a> 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2418 FAX: (952) 402-2695
<b>Test Sponsor Alternate Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Jeff Crist – <a href="mailto:Jeff.Crist@seagate.com">Jeff.Crist@seagate.com</a> 1280 Disc Drive Shakopee, MN 55372 Phone: (952) 402-2840 FAX: (952) 402-2840
<b>Auditor</b>	Storage Performance Council – <a href="http://www.storageperformance.org">http://www.storageperformance.org</a> Walter E. Baker – <a href="mailto:AuditService@StoragePerformance.org">AuditService@StoragePerformance.org</a> 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

### **Revision Information and Key Dates**

<b>Revision Information and Key Dates</b>	
<b>SPC-2C Specification revision number</b>	V1.1
<b>SPC-2C Workload Generator revision number</b>	V1.0
<b>Date Results were first used publicly</b>	October 15, 2008
<b>Date FDR was submitted to the SPC</b>	October 15, 2008
<b>Date the revised FDR was submitted to the SPC</b> Revised the Tested Storage Product (TSP) description to reference the correct product.	October 16, 2008
<b>Date the TSC will be available for shipment to customers</b>	currently available
<b>Date the TSC completed audit certification</b>	October 6, 2008

### **Tested Storage Product (TSP) Description**

The Samsung Spinpoint F1 (HD103UJ) desktop HDD is the first three-platter hard drive delivering a 1TB of capacity, using state of the art perpendicular recording technology. With its compact, lightweight package and advanced design, the F1 drive offers strong sequential performance and lowest power in class for high-density storage applications.

## SPC-2 Reported Data

SPC-2 Reported Data consists of three groups of information:

- The following SPC-2 Primary Metrics, which characterize the overall benchmark result:
  - SPC-2 MBPS™
  - SPC-2 Price Performance
  - Application Storage Unit (ASU) Capacity
- Supplemental data to the SPC-2 Primary Metrics.
  - Total Price
  - Data Protection Level
- Reported Data for each SPC Test: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand Delivery (VOD) Test.

SPC-2C Reported Data			
Samsung SpinPoint F1 HD103UJ			
SPC-2C MBPS™	ASU Capacity (GB)	Total Price	Data Protection Level
37.14	500.103	\$406.17	Unprotected
<i>The above SPC-2C MBPS™ value represents the aggregate data rate of all three SPC-2C workloads: Large File Processing, Large Database Query, and Video On Demand</i>			
SPC-2 Large File Processing (LFP) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
LFP Composite	69.13		
Write Only:			
1024 KiB Transfer	114.21	5	22.84
256 KiB Transfer	112.21	5	22.44
Read-Write:			
1024 KiB Transfer	60.70	5	12.14
256 KiB Transfer	54.07	5	10.81
Read Only:			
1024 KiB Transfer	53.42	5	10.68
256 KiB Transfer	20.20	5	4.04
<i>The above SPC-2C Data Rate value for LFP Composite represents the aggregate performance of all three LFP Test Phases: (Write Only, Read-Write, and Read Only).</i>			
SPC-2 Large Database Query (LDQ) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
LDQ Composite	37.56		
1024 KiB Transfer Size			
4 I/Os Outstanding	72.93	5	14.59
1 I/O Outstanding	53.77	5	10.75
64 KiB Transfer Size			
4 I/Os Outstanding	18.26	5	3.65
1 I/O Outstanding	5.28	5	1.06
<i>The above SPC-2C Data Rate value for LDQ Composite represents the aggregate performance of the two LDQ Test Phases: (1024 KiB and 64 KiB Transfer Sizes).</i>			
SPC-2 Video On Demand (VOD) Reported Data			
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream
	4.72	6	0.79

**SPC-2 MBPS™** represents the aggregate data rate, in megabytes per second, of all three SPC-2 workloads: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand (VOD).

**ASU (Application Storage Unit) Capacity** represents the total storage capacity read and written in the course of executing the SPC-2 benchmark.

A **Data Protection Level** of “Unprotected” makes no claim of data protection in the event of a single point of failure.


**Storage Capacities and Relationships**

The Tested Storage Configuration (TSC) must be configured so that there is either no Unused Storage or that the sum of ASU Capacity and storage required for data protection equals 50% (+-1 GiB) of the Physical Storage Capacity. This configuration meets the 50% requirement as documented below:

$$1,000.205 \text{ GB (Physical Storage Capacity)} * 0.5 = 500.102 \text{ GB}$$

$$500.103 \text{ GB (ASU Capacity)} + 0.000 \text{ GB (data protection)} = 500.103 \text{ GB}$$

The following diagram (*not to scale*) documents the various storage capacities, used in this benchmark, and their relationships.

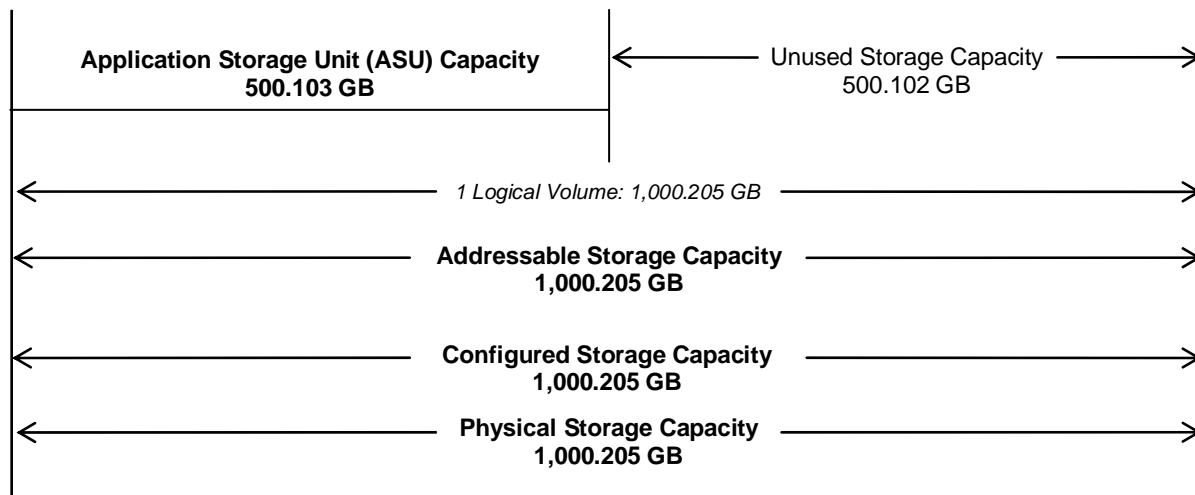

**Tested Storage Configuration Pricing (*Priced Storage Configuration*)**

Description	Part Numbers	Qty	Price	Extended Price
1TB GB SATA 3.5" HDD	HD103UJ	1	193.09	193.09
SAS HBA (incl 4 SAS/SATA -1M Cables)	LSI00033-F	1	213.08	213.08
			<b>Total</b>	<b>\$406.17</b>

**Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration**

There were no differences between the TSC and the Priced Storage Configuration.

**Benchmark Configuration/Tested Storage Configuration Diagram**



**Host System(s) and Tested Storage Configuration Components**

Host System:	Tested Storage Configuration (TSC):
<b>HS-1</b>	1 – LSI SAS3041X-R HBA
“White Box” Host System: Supermicro X6DH*-XG2 motherboard 2 – 2.8 GHz Intel® Xeon™ CPUs 16 KB L1 cache per CPU 1024 KB L2 cache per CPU 2 GB main memory	1 – Samsung F1 HD103UJ SATA disk drive
	1 – Point-to-point cable connection
Windows 2003 Enterprise Edition	
PCIe	