



**SPC BENCHMARK 1C™  
EXECUTIVE SUMMARY**

**SEAGATE TECHNOLOGY LLC  
SEAGATE 600GB 15K  
12GBPS SAS 2.5"  
ENTERPRISE PERFORMANCE  
HDD/ST600MP0065**

**SPC-1C™ V1.5**

**Submitted for Review: November 3, 2014  
Submission Identifier: C00019**

## EXECUTIVE SUMMARY

### Test Sponsor and Contact Information

Test Sponsor and Contact Information	
<b>Test Sponsor Primary Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Craig Parris – <a href="mailto:craig.parris@seagate.com">craig.parris@seagate.com</a> 1280 Disc Drive Shakopee, MN 55379 Phone: (952) 402-2418
<b>Test Sponsor Alternate Contact</b>	Seagate Technology LLC – <a href="http://www.seagate.com">http://www.seagate.com</a> Barbara Craig – <a href="mailto:barbara.j.craig@seagate.com">barbara.j.craig@seagate.com</a> 1280 Disc Drive Shakopee, MN 55379 Phone: (952) 402-2804
<b>Auditor</b>	Storage Performance Council – <a href="http://www.storageperformance.org">http://www.storageperformance.org</a> Walter E. Baker – <a href="mailto:AuditService@StoragePerformance.org">AuditService@StoragePerformance.org</a> 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

### Revision Information and Key Dates

Revision Information and Key Dates	
<b>SPC-1C Specification revision number</b>	V1.5
<b>SPC-1C Workload Generator revision number</b>	V1.2.0
<b>Date Results were first used publicly</b>	November 3, 2014
<b>Date the FDR was submitted to the SPC</b>	November 3, 2014
<b>Date the TSC is available for shipment to customers</b>	currently available
<b>Date the TSC completed audit certification</b>	October 31, 2014

### Tested Storage Product (TSP) Description

These drives provide high performance, high capacity data storage for a variety of systems including engineering workstations, network servers, mainframes, and supercomputers. The 12Gb Serial Attached SCSI interface is designed to meet next-generation computing demands for performance, scalability, flexibility and high-density storage requirements . These drives are random access storage devices designed to support the 12Gb Serial Attached SCSI.

## Summary of Results

SPC-1C Reported Data	
<b>Tested Storage Product (TSP) Name:</b> Seagate 600GB 15K 12Gbps SAS 2.5" Enterprise Performance HDD/ST600MP0065	
Metric	Reported Result
SPC-1C Submission Identifier	C00019
SPC-1C IOPS™	4,700.46
Total ASU Capacity	7,194.852 GB
Data Protection Level	Protected 1 ( <i>Mirroring</i> )
Total Price	\$11,995.55
Pricing Currency	U.S. Dollars
Target Country for availability, sales and support	USA

**SPC-1C Submission Identifier** is the unique identifier assigned to this specific SPC-1C Result.

**SPC-1C IOPS™** represents the maximum I/O Request Throughput at the 100% load point.

**Total ASU (Application Storage Unit) Capacity** represents the total storage capacity available to be read and written in the course of executing the SPC-1C benchmark.

A **Data Protection Level** of **Protected 1** using **Mirroring** configures two or more identical copies of user data.

***Protected 1:** The single point of failure of any **storage device** in the configuration will not result in permanent loss of access to or integrity of the SPC-1C Data Repository.*


**Total Price** includes the cost of the Priced Storage Configuration plus three years of hardware maintenance and software support as detailed on page [7](#).



**Pricing Currency** is formal name for the currency used in calculating the **Total Price**. That currency may be the local currency of the **Target Country** or the currency of a difference country (*non-local currency*).


The **Target Country** is the country in which the Priced Storage Configuration is available for sale and in which the required hardware maintenance and software support is provided either directly from the Test Sponsor or indirectly via a third-party supplier.

### Storage Capacities, Relationships, and Utilization

The following four charts and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

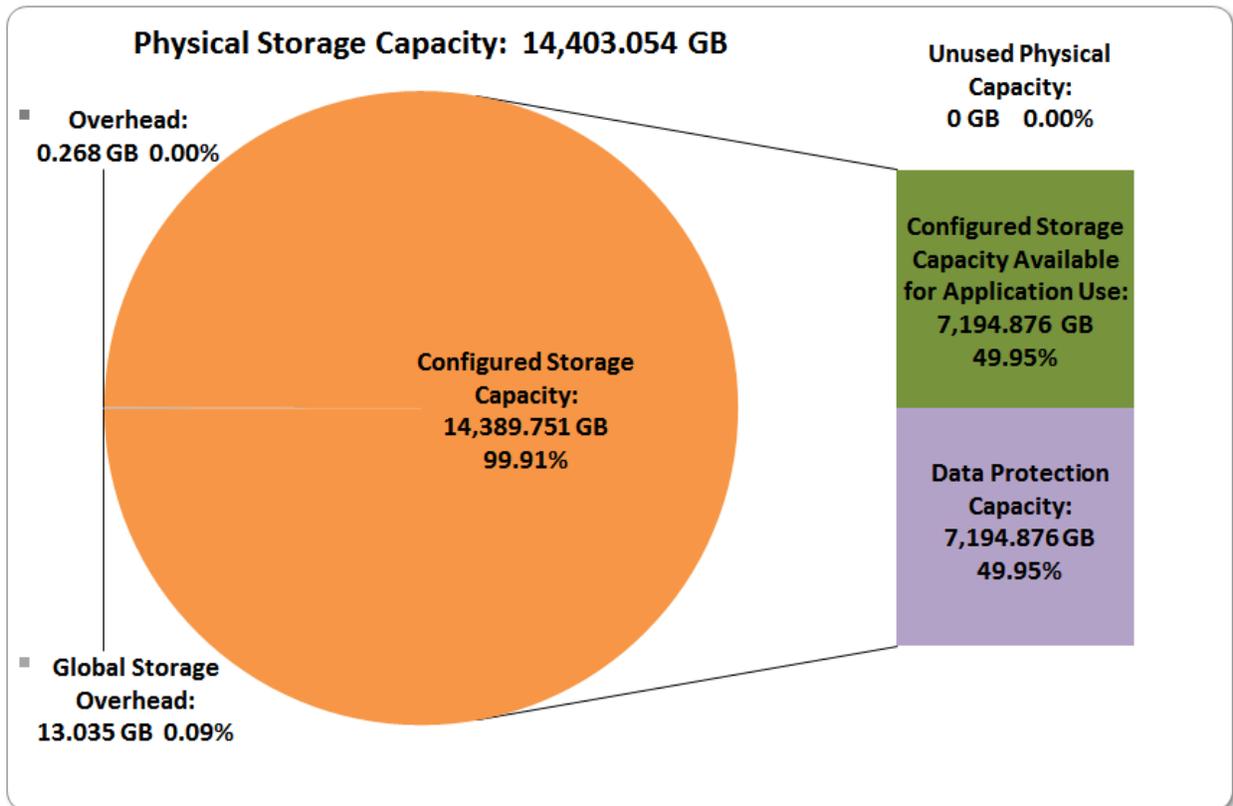

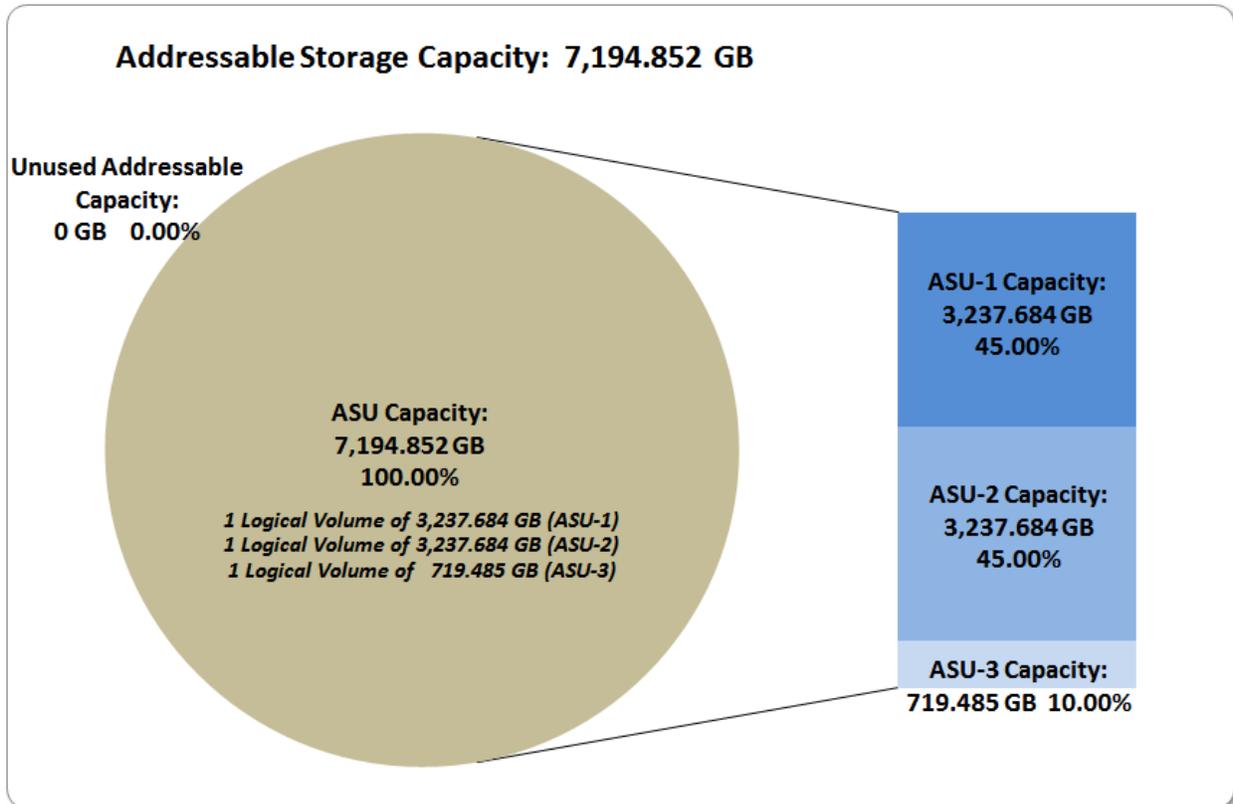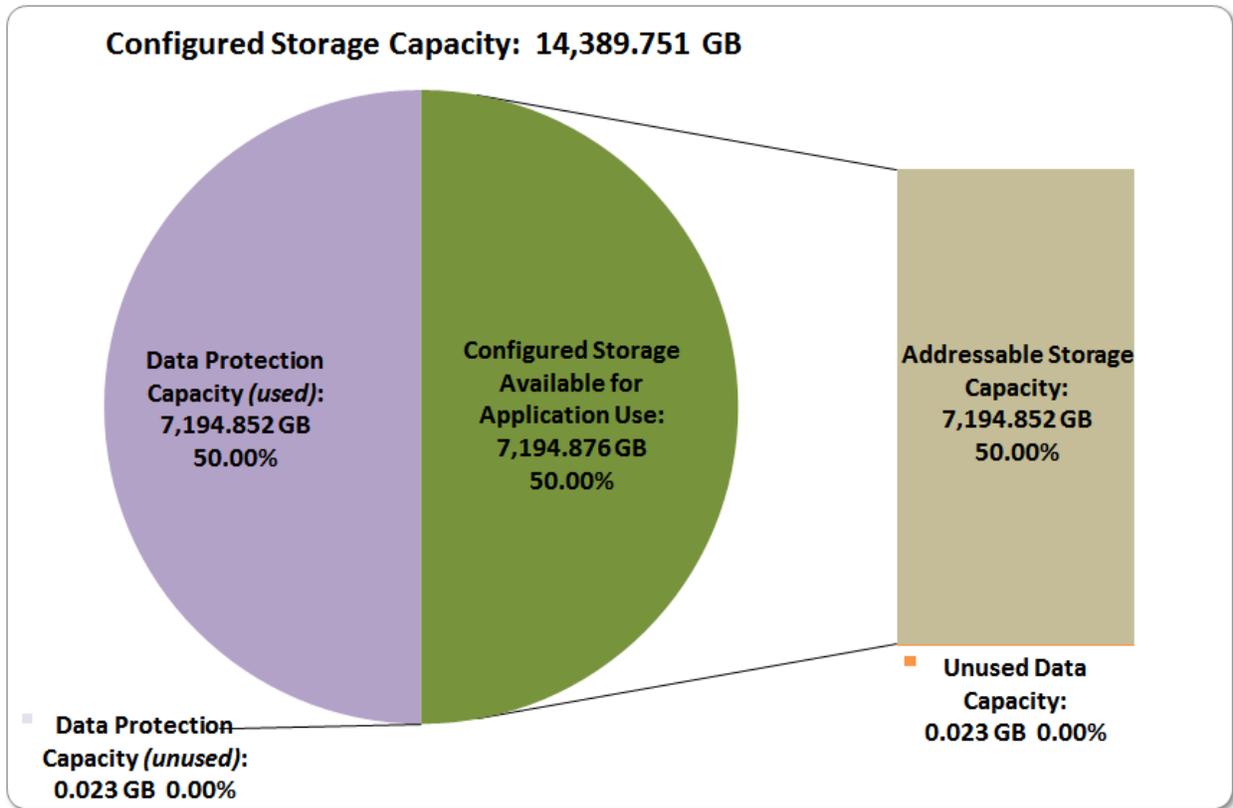

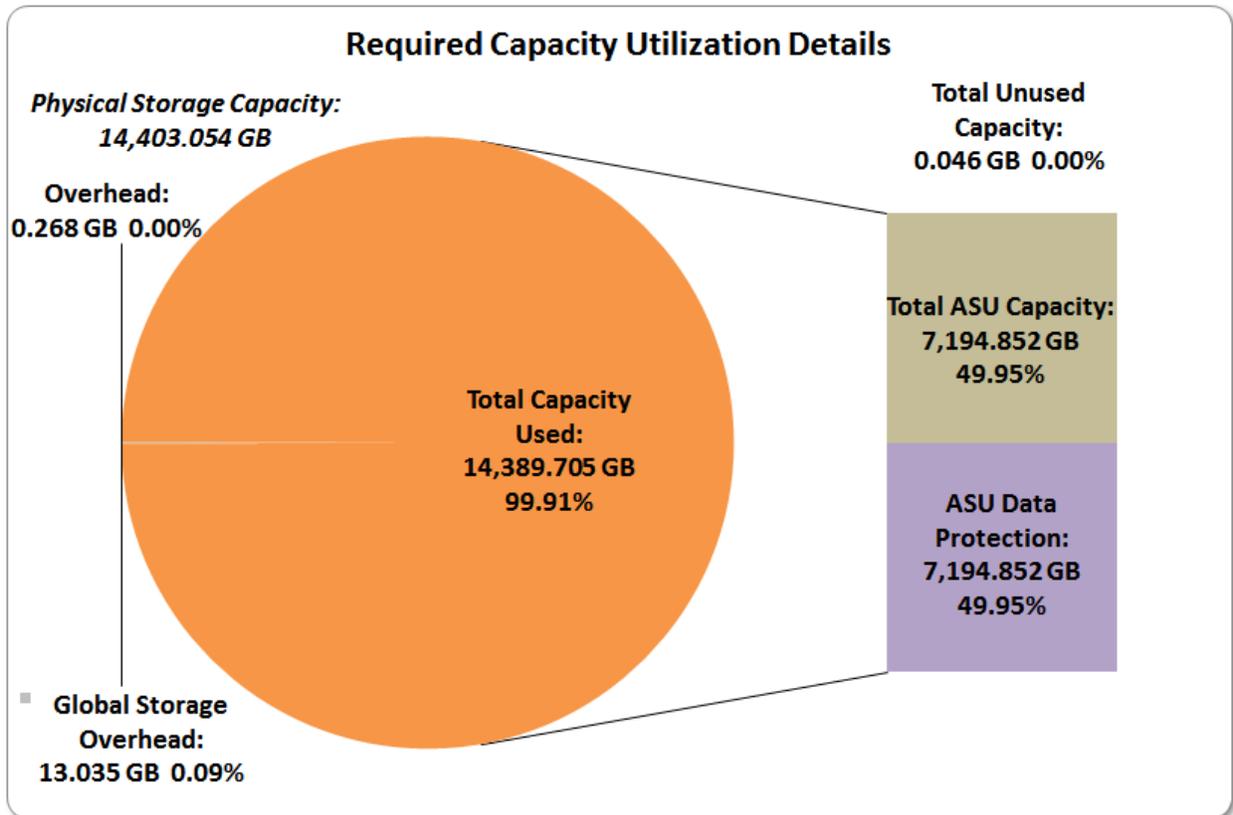

The Tested Storage Configuration (TSC) must be configured so that there is either no Unused Storage or that the sum of Total ASU Capacity and storage required for data protection equals 50% (+-1 GiB) of the Physical Storage Capacity.


The TSC met the “100% utilization” requirement since it did not include any Unused Storage.

Detailed information for the various storage capacities and utilizations is available on pages 20-21 of the corresponding SPC-1C Full Disclosure Report.

## Response Time – Throughput Curve

The Response Time-Throughput Curve illustrates the Average Response Time (milliseconds) and I/O Request Throughput at 100%, 95%, 90%, 80%, 50%, and 10% of the workload level used to generate the SPC-1 IOPS™ metric.

The Average Response Time measured at the any of the above load points cannot exceed 30 milliseconds or the benchmark measurement is invalid.

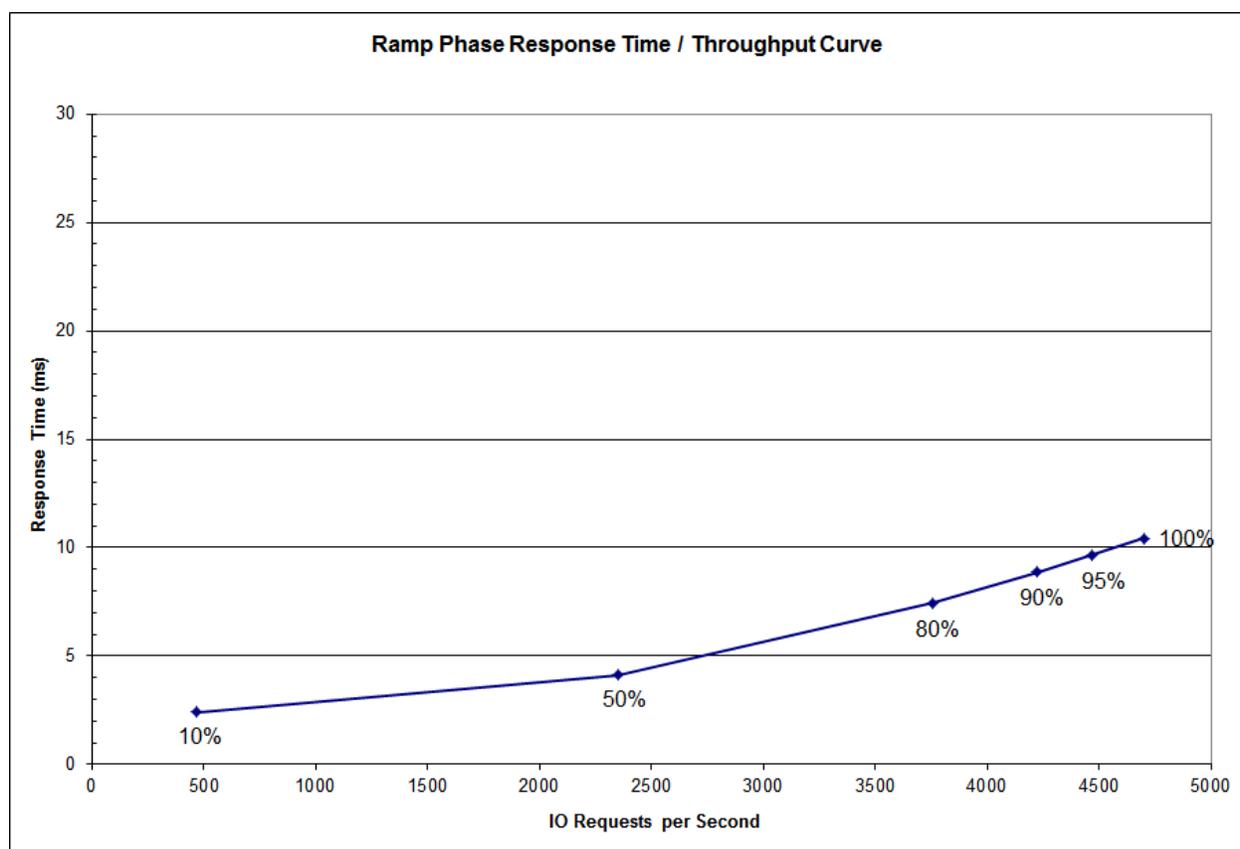

## Response Time – Throughput Data

	10% Load	50% Load	80% Load	90% Load	95% Load	100% Load
<b>I/O Request Throughput</b>	469.41	2,349.39	3,759.59	4,223.85	4,469.16	4,700.46
<b>Average Response Time (ms):</b>						
<b>All ASUs</b>	2.41	4.13	7.44	8.86	9.65	10.42
<b>ASU-1</b>	3.27	5.65	10.05	11.85	12.86	13.82
<b>ASU-2</b>	3.11	5.31	10.70	13.35	14.78	16.15
<b>ASU-3</b>	0.30	0.39	0.50	0.56	0.62	0.68
<b>Reads</b>	5.67	9.90	18.13	21.62	23.58	25.44
<b>Writes</b>	0.29	0.38	0.49	0.55	0.59	0.64

### Priced Storage Configuration Pricing


Description	Part Numbers	Qty	Price	Extended Price
<b>600GB SAS 2.5" SSHD</b>	ST600MP00065	24	\$310.00	7,440.00
<b>12Gb SAS RAID Controller</b>	LSI SAS 9361-8i	1	\$592.55	592.55
<b>Storage Enclosure JBOD</b>	DNS-1640D	1	\$3,850.00	3,850.00
<b>SAS 3.0 1M Cable</b>	MiniSAS	2	\$56.50	113.00
			<b>Total</b>	<b>11,995.55</b>

### Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and the Priced Storage Configuration.

### Benchmark Configuration/Tested Storage Configuration Diagram

**24 – Seagate ST600MP0065 600GB  
15K 12Gbps SAS 2.5” HDDs**

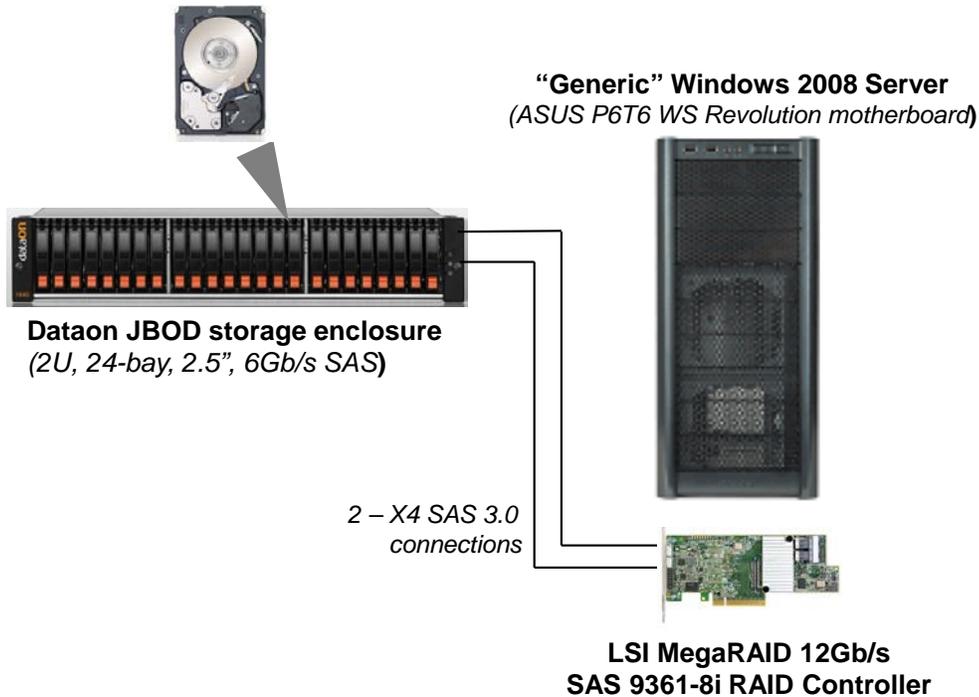

### Host System and Tested Storage Configuration Components

Host System	Tested Storage Configuration (TSC)
“Generic” Windows 2008 Server ASUS P6T6 WS Revolution motherboard 1 – Intel® Xeon® Processor X5570 4 Cores, 2.93 GHz, 8 MB Intel® Smart Cache	1 – LSI MegaRAID 12Gb SAS 9361-8i RAID controller with 1 GB cache
6 GB main memory	1 – PCIe 2.0 x8 front-end connection
Windows Server 2008 R2	2 – 12Gb SAS backend connections (load balance mode) (4 lanes/connection, 2 connections used)
PCIe 2.0	<b>24 – Seagate 600GB 15K 12Gbps SAS 2.5” Enterprise Performance HDD/ST600MP0065 HDDs</b>
	1 – Dataon DNS-1640 (JBOD) storage enclosure (2U 24-bay 2.5” 6Gb/s SAS)
	2 – SAS 3.0 1m cables