



SPC BENCHMARK 2™
FULL DISCLOSURE REPORT
HITACHI DATA SYSTEMS CORPORATION
HITACHI UNIFIED STORAGE VM

SPC-2™ V1.5

Submitted for Review: January 21, 2014
Submission Identifier: B00069

First Edition – January 2014

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by Hitachi Data Systems Corporation for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. Hitachi Data Systems Corporation may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local Hitachi Data Systems Corporation representative for information on products and services available in your area.

© Copyright Hitachi Data Systems Corporation 2014. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

SPC Benchmark 2, SPC-2, SPC-2 MBPS, and SPC-2 Price-Performance are trademarks of the Storage Performance Council. Hitachi Data Systems, Hitachi, HDS and the Hitachi Data Systems logo are trademarks or registered trademarks of Hitachi Data Systems Corporation in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

Table of Contents

Audit Certification	8
Audit Certification (cont.)	9
Letter of Good Faith	10
Executive Summary	11
Test Sponsor and Contact Information	11
Revision Information and Key Dates	11
Tested Storage Product (TSP) Description	12
SPC-2 Reported Data	13
SPC-2 Reported Data (continued)	14
Storage Capacities, Relationships and Utilization	15
Priced Storage Configuration Pricing	18
Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration	19
Priced Storage Configuration Diagram	20
Priced Storage Configuration Components	21
Configuration Information	22
Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram	22
Storage Network Configuration	22
Host System and Tested Storage Configuration Table	22
Benchmark Configuration/Tested Storage Configuration Diagram	23
Host System and Tested Storage Configuration Components	24
Customer Tunable Parameters and Options	25
Tested Storage Configuration (TSC) Creation and Configuration	25
SPC-2 Workload Generator Storage Configuration	25
ASU Pre-Fill	26
SPC-2 Data Repository	27
SPC-2 Storage Capacities and Relationships	27
SPC-2 Storage Capacities	27
SPC-2 Storage Hierarchy Ratios	28
SPC-1 Storage Capacity Charts	28
Storage Capacity Utilization	30
Logical Volume Capacity and ASU Mapping	31
SPC-2 Benchmark Execution Results	32
SPC-2 Tests, Test Phases, Test Run Sequences, and Test Runs	32
Large File Processing Test	34

SPC-2 Workload Generator Commands and Parameters	34
SPC-2 Test Results File	35
SPC-2 Large File Processing Average Data Rates (MB/s)	35
SPC-2 Large File Processing Average Data Rates Graph	36
SPC-2 Large File Processing Average Data Rate per Stream	37
SPC-2 Large File Processing Average Data Rate per Stream Graph	38
SPC-2 Large File Processing Average Response Time.....	39
SPC-2 Large File Processing Average Response Time Graph	40
Large File Processing Test – WRITE ONLY Test Phase	41
SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” Test Run Data ...	42
SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” Graphs	42
Average Data Rate – Complete Test Run	42
Average Data Rate – Measurement Interval (MI) Only	42
Average Data Rate per Stream	42
Average Response Time	42
SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” Test Run Data	42
SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” Graphs	42
Average Data Rate – Complete Test Run	42
Average Data Rate – Measurement Interval (MI) Only	42
Average Data Rate per Stream	42
Average Response Time	42
Large File Processing Test – READ-WRITE Test Phase	43
SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” Test Run Data ...	44
SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” Graphs	44
Average Data Rate – Complete Test Run	44
Average Data Rate – Measurement Interval (MI) Only	44
Average Data Rate per Stream	44
Average Response Time	44
SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” Test Run Data	44
SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” Graphs	44
Average Data Rate – Complete Test Run	44
Average Data Rate – Measurement Interval (MI) Only	44
Average Data Rate per Stream	44
Average Response Time	44
Large File Processing Test – READ ONLY Test Phase	45
SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” Test Run Data	46
SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” Graphs	46
Average Data Rate – Complete Test Run	46
Average Data Rate – Measurement Interval (MI) Only	46

Average Data Rate per Stream	46
Average Response Time	46
SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” Test Run Data	46
SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” Graphs	46
Average Data Rate – Complete Test Run	46
Average Data Rate – Measurement Interval (MI) Only	46
Average Data Rate per Stream	46
Average Response Time	46
Large Database Query Test.....	47
SPC-2 Workload Generator Commands and Parameters	47
SPC-2 Test Results File	47
SPC-2 Large Database Query Average Data Rates (MB/s)	48
SPC-2 Large Database Query Average Data Rates Graph.....	48
SPC-2 Large Database Query Average Data Rate per Stream	49
SPC-2 Large Database Query Average Data Rate per Stream Graph.....	49
SPC-2 Large Database Query Average Response Time.....	50
SPC-2 Large Database Query Average Response Time Graph	50
Large Database Query Test – 1024 KiB Transfer Size Test Phase	51
SPC-2 “Large Database Query/1024 KiB Transfer Size/4 Outstanding I/Os” Test Run Data	52
SPC-2 “Large Database Query/1024 KiB Transfer Size/4 Outstanding I/Os” Graphs	52
Average Data Rate – Complete Test Run	52
Average Data Rate – Measurement Interval (MI) Only	52
Average Data Rate per Stream	52
Average Response Time	52
SPC-2 “Large Database Query/1024 KiB Transfer Size/1 Outstanding I/O” Test Run Data	52
SPC-2 “Large Database Query/1024 KiB Transfer Size/1 Outstanding I/O” Graphs.. ..	52
Average Data Rate – Complete Test Run	52
Average Data Rate – Measurement Interval (MI) Only	52
Average Data Rate per Stream	52
Average Response Time	52
Large Database Query Test – 64 KiB Transfer Size Test Phase	53
SPC-2 “Large Database Query/64 KiB Transfer Size/4 Outstanding I/Os” Test Run Data	54
SPC-2 “Large Database Query/64 KiB Transfer Size/4 Outstanding I/Os” Graphs	54
Average Data Rate – Complete Test Run	54
Average Data Rate – Measurement Interval (MI) Only	54
Average Data Rate per Stream	54
Average Response Time	54

SPC-2 “Large Database Query/64 KIB TRANSFER SIZE/1 Outstanding I/O” Test Run Data	54
SPC-2 “Large Database Query/64 KIB TRANSFER SIZE/1 Outstanding I/O” Graphs.....	54
Average Data Rate – Complete Test Run	54
Average Data Rate – Measurement Interval (MI) Only	54
Average Data Rate per Stream	54
Average Response Time	54
Video on Demand Delivery Test	55
SPC-2 Workload Generator Commands and Parameters	55
SPC-2 Test Results File	56
SPC-2 Video on Demand Delivery Test Run Data	56
Video on Demand Delivery Test – TEST RUN DATA BY INTERVAL	57
SPC-2 Video on Demand Delivery Average Data Rate Graph	58
SPC-2 Video on Demand Delivery Average Data Rate per Stream Graph.....	58
SPC-2 Video on Demand Delivery Average Response Time Graph	59
SPC-2 Video on Demand Delivery Maximum Response Time Graph.....	59
Data Persistence Test.....	60
SPC-2 Workload Generator Commands and Parameters	60
Data Persistence Test Results File	60
Data Persistence Test Results.....	61
Priced Storage Configuration Availability Date.....	62
Anomalies or Irregularities	62
Appendix A: SPC-2 Glossary	63
“Decimal” (<i>powers of ten</i>) Measurement Units.....	63
“Binary” (<i>powers of two</i>) Measurement Units.....	63
SPC-2 Data Repository Definitions	63
SPC-2 Data Protection Levels	64
SPC-2 Test Execution Definitions	64
I/O Completion Types	67
SPC-2 Test Run Components	67
Appendix B: Customer Tunable Parameters and Options.....	68
Appendix C: Tested Storage Configuration (TSC) Creation	69
1. Initial Installation and Configuration – Customer Support Engineer.....	69
2. Installing ‘Hitachi Command Control Interface Software’ to configure HUS VM	69
3. Creating LDEVs using Hitachi Command Control Interface Software	70
4. Format Logical Devices using Hitachi Command Control Interface Software.....	70

5. Map Logical Devices to Host Ports using Hitachi Command Control Interface Software.....	70
6. Reboot Host Systems.....	70
Referenced Scripts.....	71
ldevcreate.bat	71
ldevformat.bat	72
lunmap.bat.....	74
Appendix D: SPC-2 Workload Generator Storage Commands and Parameter Files	84
ASU Pre-Fill.....	84
Common Commands/Parameters – LFP, LDQ and VOD	86
Common Commands/Parameters – LFP, LDQ, VOD and Persistence	87
Large File Processing Test (LFP)	96
Large Database Query Test (LDQ)	97
Video on Demand Delivery (VOD).....	98
SPC-2 Persistence Test Run 1 (<i>write phase</i>)	99
SPC-2 Persistence Test Run 2 (read phase)	99
Appendix E: SPC-2 Workload Generator Execution Commands and Parameters	100
ASU Pre-Fill, Large File Processing Test, Large Database Query Test, Video on Demand Delivery Test, and SPC-2 Persistence Test Run 1.....	100
Prefill-multihost_HUSVM_SPC2.bat.....	100
vdbench_rsh.bat	100
java_taskkill.bat.....	100
HUS-VM_SPC2_testing.bat.....	101
RemoteStart.bat	101
RemoteStart-stop.bat.....	101
SPC-2 Persistence Test Run 2	102
Appendix F: Third Party Quotations.....	103
Emulex LightPulse LPe12002 FC HBAs and Cables.....	103

AUDIT CERTIFICATION



Mel Boksenbaum
Hitachi Data Systems Corporation
750 Central Expressway M/S U9922
Santa Clara, CA 95050

December 16, 2013

The SPC Benchmark 2™ Reported Data listed below for the **Hitachi Unified Storage VM** was produced in compliance with the SPC Benchmark 2™ V1.5 Onsite Audit requirements.

SPC Benchmark 2™ V1.5 Reported Data	
Tested Storage Product (TSP) Name: Hitachi Unified Storage VM	
Metric	Reported Result
SPC-2 MBPS™	11,274.83
SPC-2 Price-Performance	\$32.64/SPC-2 MBPS™
ASU Capacity	193,667,977 GB
Data Protection Level	Protected 2 (RAID-5)
Total Price (including three-year maintenance)	\$368,065.12
Currency Used	U.S. Dollars
Target Country for availability, sales and support	USA

The following SPC Benchmark 2™ Onsite Audit requirements were reviewed and found compliant with V1.5 of the SPC Benchmark 2™ specification:

- A Letter of Good Faith, signed by a senior executive.
- The following Data Repository storage items were verified by physical inspection and documentation supplied by Hitachi Data Systems Corporation:
 - ✓ Physical Storage Capacity and related requirements.
 - ✓ Configured Storage Capacity and related requirements.
 - ✓ Addressable Storage Capacity and related requirements.
 - ✓ Capacity of each Logical Volume and related requirements.
 - ✓ Capacity of the Application Storage Unit (ASU) and related requirements.
- The total Application Storage Unit (ASU) Capacity was filled with random data prior to the execution of the SPC-2 Tests.
- An appropriate diagram of the Benchmark Configuration (BC)/Tested Storage Configuration (TSC).

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@StoragePerformance.org
650.556.9384

AUDIT CERTIFICATION (CONT.)

Hitachi Unified Storage VM
SPC-2 Audit Certification


Page 2

- Physical verification of the components to match the above diagram.
- Listings and commands used to create and configure the Benchmark Configuration/Tested Storage Configuration.
- Documentation that no customer tunable parameter or option was changed from its default value.
- The following Host System items were verified by physical inspection and documentation supplied by Hitachi Data Systems Corporation:
 - ✓ Required Host System configuration information.
 - ✓ The TSC boundary within the Host System.
- The following SPC-2 Workload Generator information was verified by physical inspection documentation supplied by Hitachi Data Systems Corporation:
 - ✓ The presence and version number of the Workload Generator on each Host System.
 - ✓ Commands and parameters used to configure the SPC-2 Workload Generator.
- The Test Results Files and resultant Summary Results Files received from Hitachi Data Systems Corporation for each of the following were authentic, accurate, and compliant with all of the requirements and constraints of Clauses 6 and 7 of the SPC-2 Benchmark Specification:
 - ✓ Data Persistence Test
 - ✓ Large File Processing Test
 - ✓ Large Database Query Test
 - ✓ Video on Demand Delivery Test
- There were no differences between the Tested Storage Configuration and Priced Storage Configuration..
- The submitted pricing information met all of the requirements and constraints of Clause 9 of the SPC-2 Benchmark Specification.
- The Full Disclosure Report (FDR) met all of the requirements in Clause 10 of the SPC-2 Benchmark Specification.
- This successfully audited SPC measurement is not subject to an SPC Confidential Review.

Audit Notes:

There were no audit notes or exceptions.

Respectfully,



Walter E. Baker
SPC Auditor

Storage Performance Council
643 Bair Island Road, Suite 103
Redwood City, CA 94062
AuditService@StoragePerformance.org
650.556.9384

LETTER OF GOOD FAITH

HITACHI
Inspire the Next



Date: August 28, 2013

Mr. Walter E. Baker, SPC Auditor
Gradient Systems, Inc.
643 Bair Island Road, suite 103
Redwood City, CA 94063

Subject: SPC-2 Letter of Good Faith for the Hitachi Unified Storage VM

Hitachi Data Systems is the SPC-2 Test Sponsor for the above listed product. To the best of our knowledge and belief the required SPC-2 benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with Version 1.4 of the SPC-2 benchmark specification.

In addition, we have reported any items in the Benchmark Configuration and execution of the benchmark that affected the reported results even if the items are not explicitly required to be disclosed by the SPC-2 benchmark specification.

Regards,



Alan Cade
Vice President
Technical Operations

Hitachi Data Systems

2845 Lafayette Street · Santa Clara, CA 95050

408-970-7113

EXECUTIVE SUMMARY

Test Sponsor and Contact Information

Test Sponsor and Contact Information	
Test Sponsor Primary Contact	Hitachi Data Systems Corporation – http://www.hds.com David Cordero – david.cordero@hds.com 750 Central Expressway M/S U9922 Santa Clara, CA 95050 Phone: (617) 838-4040 FAX: (617) 838-4040
Test Sponsor Alternate Contact	Hitachi Data Systems Corporation – http://www.hds.com Mel Boksenbaum – mel.boksenbaum@hds.com 750 Central Expressway M/S U9922 Santa Clara, CA 95050 Phone: (408) 970-7922 FAX: (408) 327-3066
Auditor	Storage Performance Council – http://www.storageperformance.org Walter E. Baker – AuditService@StoragePerformance.org 643 Bair Island Road, Suite 103 Redwood City, CA 94063 Phone: (650) 556-9384 FAX: (650) 556-9385

Revision Information and Key Dates

Revision Information and Key Dates	
SPC-2 Specification revision number	V1.5
SPC-2 Workload Generator revision number	V1.2
Date Results were first used publicly	January 21, 2014
Date FDR was submitted to the SPC	January 21, 2014
Date the TSC will be available for shipment to customers	currently available
Date the TSC completed audit certification	December 16, 2013

Tested Storage Product (TSP) Description

Hitachi Unified Storage VM can manage all of your existing storage and consolidate all of your data in a single, virtualized platform to ease the management of information. Hitachi Unified Storage VM is built with trusted Hitachi reliability for application availability, performance and lower cost of ownership. Delivering enterprise storage virtualization in a unified platform lets you manage information more efficiently.

HUS VM places emphasis on high availability with nondisruptive microcode and hardware upgrades, automatic failover architecture with redundant, hot-swappable components, dual data paths and dual control paths and nonvolatile backup of cache using a combination of battery and flash disk drives. Universal data replication can be provided for local and remote data protection across multiple data centers.

Intelligent, controller-based storage virtualization provides a platform for aggregating all storage services for multivendor storage systems. Host-transparent movement, copy and migration of data between storage is enabled with reduced interruption of applications. Hitachi Command Suite provides the software management platform for advanced data and storage management that helps improve administration, operations, provisioning, performance and resilience. Automated data placement enables higher performance and lower cost storage tiers, placing the right data in the right place, at the right time.

SPC-2 Reported Data

SPC-2 Reported Data consists of three groups of information:

- The following SPC-2 Primary Metrics, which characterize the overall benchmark result:
 - SPC-2 MBPS™
 - SPC-2 Price Performance™
 - Application Storage Unit (ASU) Capacity
- Supplemental data to the SPC-2 Primary Metrics.
 - Total Price
 - Data Protection Level
 - Currency Used
 - Target Country
- Reported Data for each SPC Test: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand Delivery (VOD) Test.

SPC-2 MBPS™ represents the aggregate data rate, in megabytes per second, of all three SPC-2 workloads: Large File Processing (LFP), Large Database Query (LDQ), and Video on Demand (VOD).

SPC-2 Price-Performance™ is the ratio of **Total Price** to **SPC-2 MBPS™**.

ASU (Application Storage Unit) Capacity represents the total storage capacity available to be read and written in the course of executing the SPC-2 benchmark.

Total Price includes the cost of the Priced Storage Configuration plus three years of hardware maintenance and software support as detailed on page 18.

Data Protection Level of Protected 2 using **RAID-5** by distributing check data corresponding to user data across multiple disk in the form of bit-by-bite parity.

***Protected 2:** The single point of failure of any **component** in the configuration will not result in permanent loss of access to or integrity of the SPC-2 Data Repository.*

Currency Used is formal name for the currency used in calculating the **Total Price** and **SPC-2 Price-Performance™**. That currency may be the local currency of the **Target Country** or the currency of a difference country (*non-local currency*).

The **Target Country** is the country in which the Priced Storage Configuration is available for sale and in which the required hardware maintenance and software support is provided either directly from the Test Sponsor or indirectly via a third-party supplier.


SPC-2 Reported Data (continued)



SPC-2 Reported Data				
Hitachi Unified Storage VM				
SPC-2 MBPS™	SPC-2 Price-Performance	ASU Capacity (GB)	Total Price	Data Protection Level
11,274.83	\$32.64	193,667.977	\$368,065.12	Protected 2 (RAID-5)
<i>The above SPC-2 MBPS™ value represents the aggregate data rate of all three SPC-2 workloads: Large File Processing (LFP), Large Database Query (LDQ), and Video On Demand (VOD)</i>				
SPC-2 Large File Processing (LFP) Reported Data				
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream	Price-Performance
LFP Composite	8,885.68			\$41.42
Write Only:				
1024 KiB Transfer	5,605.00	32	175.16	
256 KiB Transfer	5,602.82	32	175.09	
Read-Write:				
1024 KiB Transfer	8,148.26	200	40.74	
256 KiB Transfer	8,199.30	200	41.00	
Read Only:				
1024 KiB Transfer	12,886.38	200	64.43	
256 KiB Transfer	12,872.31	200	64.36	
<i>The above SPC-2 Data Rate value for LFP Composite represents the aggregate performance of all three LFP Test Phases: (Write Only, Read-Write, and Read Only).</i>				
SPC-2 Large Database Query (LDQ) Reported Data				
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream	Price-Performance
LDQ Composite	12,749.20			\$28.87
1024 KiB Transfer Size				
4 I/Os Outstanding	12,806.07	120	106.72	
1 I/O Outstanding	12,749.15	120	106.24	
64 KiB Transfer Size				
4 I/Os Outstanding	12,711.27	200	63.56	
1 I/O Outstanding	12,730.30	200	63.65	
<i>The above SPC-2 Data Rate value for LDQ Composite represents the aggregate performance of the two LDQ Test Phases: (1024 KiB and 64 KiB Transfer Sizes).</i>				
SPC-2 Video On Demand (VOD) Reported Data				
	Data Rate (MB/second)	Number of Streams	Data Rate per Stream	Price-Performance
	12,189.61	15,500	0.79	\$30.19


Storage Capacities, Relationships and Utilization

The following four charts and table document the various storage capacities, used in this benchmark, and their relationships, as well as the storage utilization values required to be reported.

The capacity values in each of the following four charts are listed as integer values, for readability, rather than the decimal values listed elsewhere in this document.

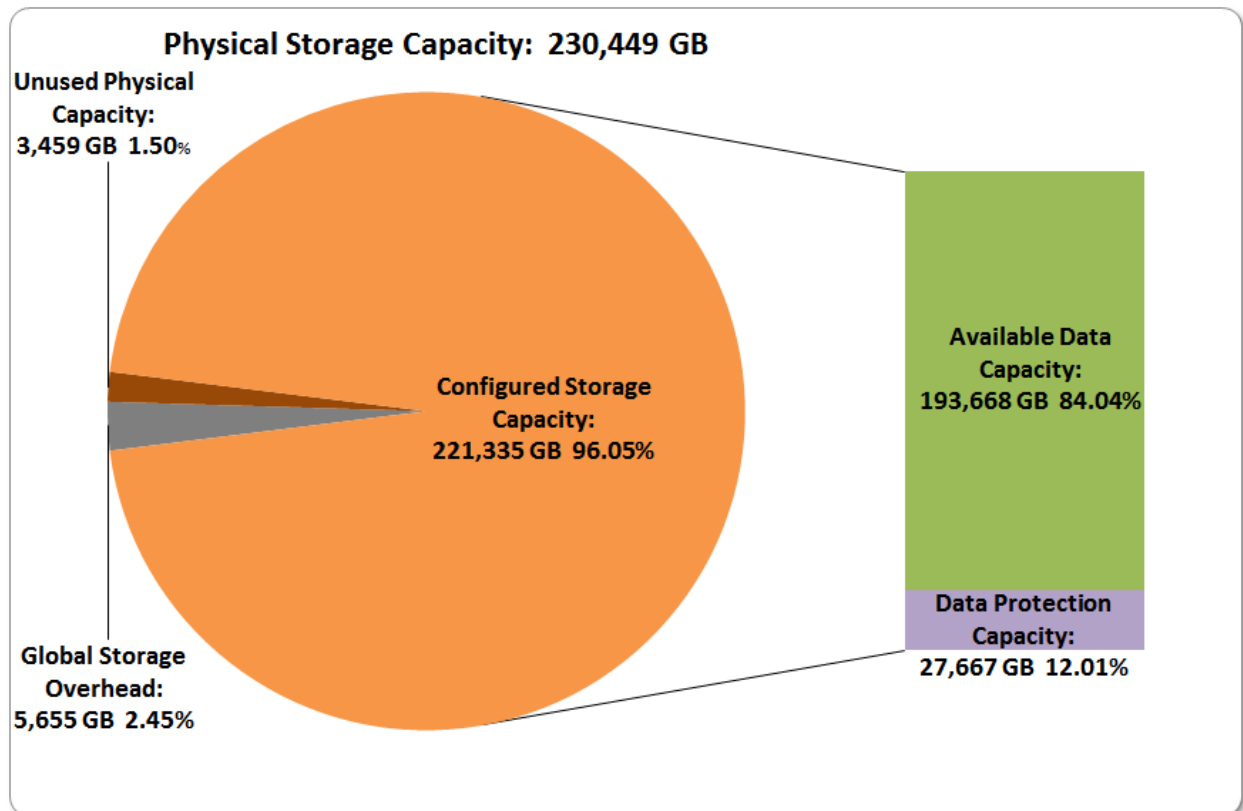

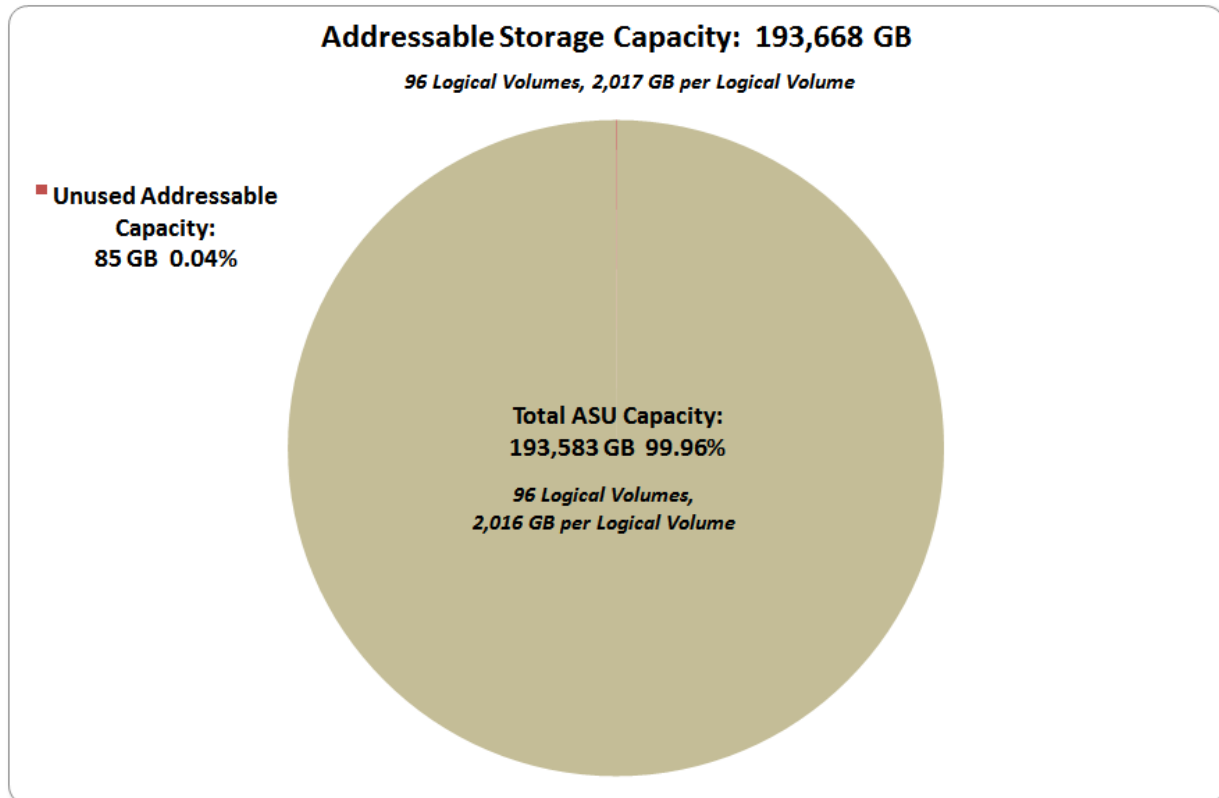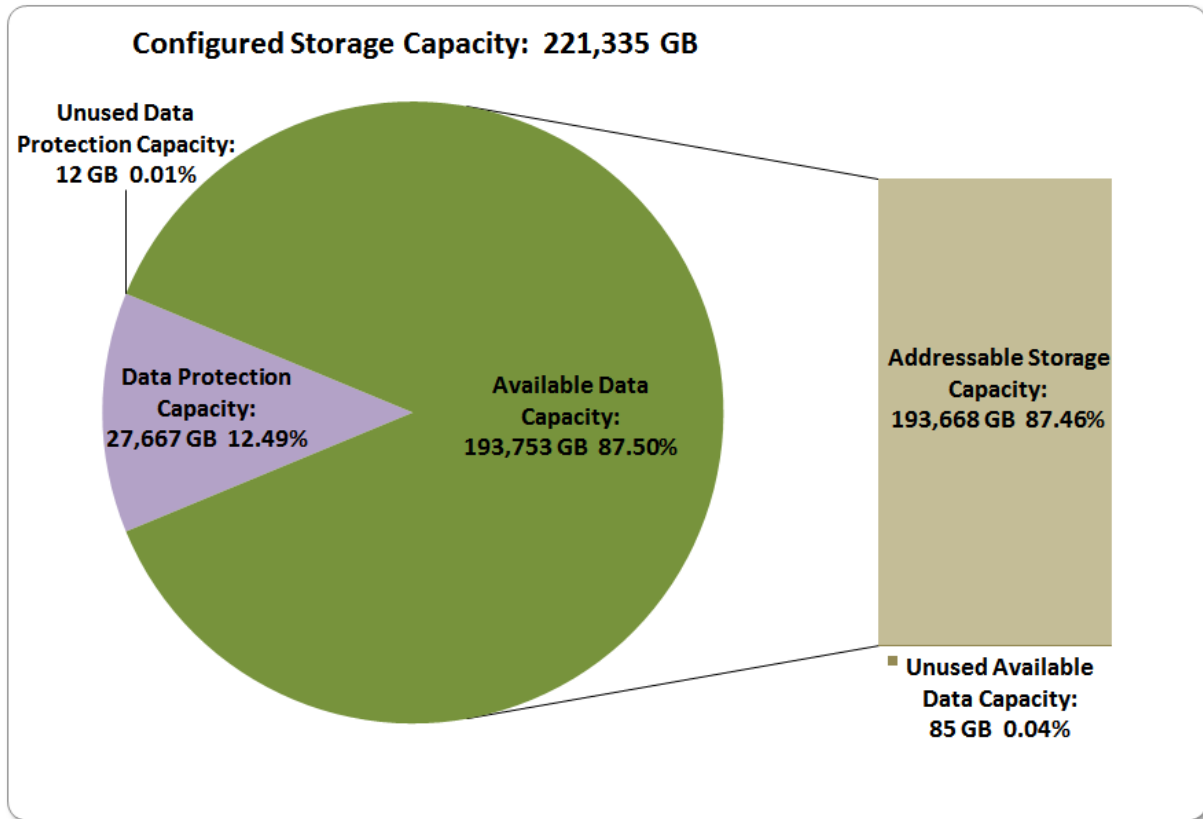

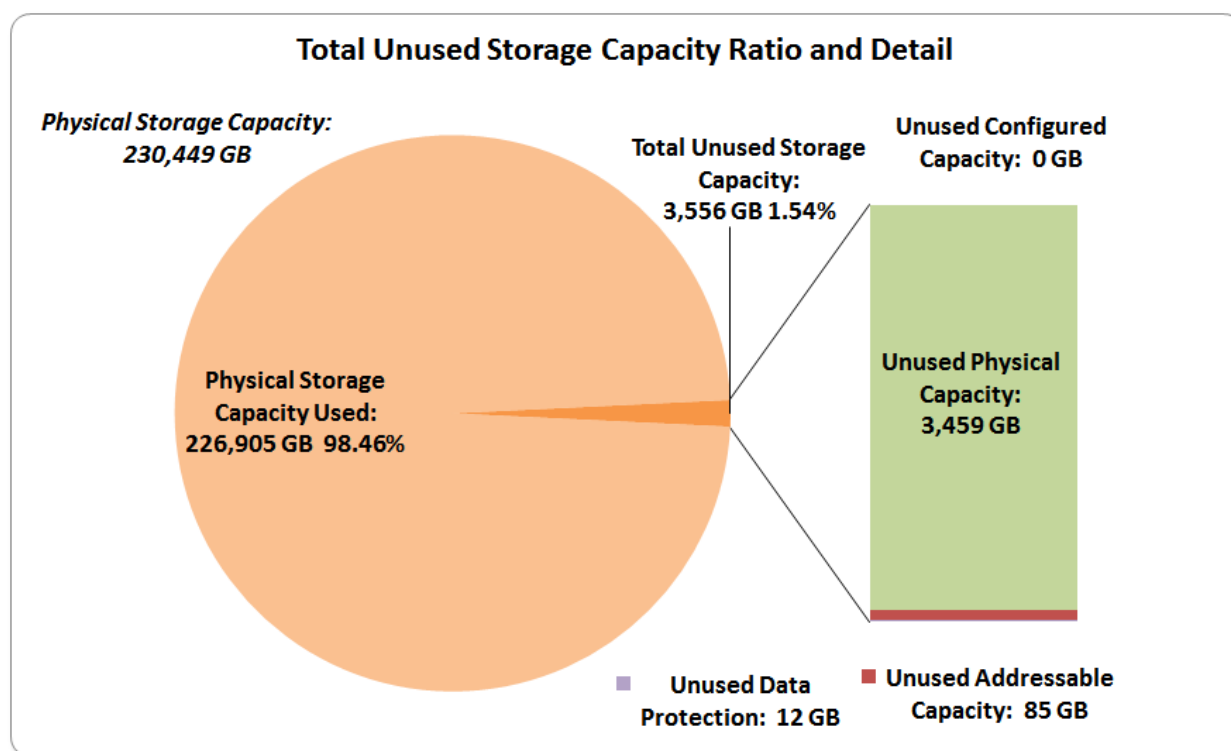

SPC-2 Storage Capacity Utilization	
Application Utilization	84.00%
Protected Application Utilization	96.00%
Unused Storage Ratio	1.54%

Application Utilization: Total ASU Capacity (193,582.766 GB) divided by Physical Storage Capacity (230,448.870 GB).

Protected Application Utilization: Total ASU Capacity (193,582.766 GB) plus total Data Protection Capacity (27,666.954 GB) minus unused Data Protection Capacity (12.173 GB) divided by Physical Storage Capacity (230,448.870 GB).

Unused Storage Ratio: Total Unused Capacity (3,556.153 GB) divided by Physical Storage Capacity (230,448.870 GB) and may not exceed 45%.

Detailed information for the various storage capacities and utilizations is available on pages 27-28 in the Full Disclosure Report.

Priced Storage Configuration Pricing

Product Description	Qty	Unit List Price	Product List Price
Power Cable 250VAC 10A IEC320-C14	34	\$39.00	\$1,326.00
Methode Mounting Bracket for PDU-221112F10 (1 per PDU)	4	\$67.00	\$268.00
Baying kit external	4	\$5.90	\$23.60
Solution 19 in rack ROW MIN	1	\$8,110.00	\$8,110.00
4GB USB memory stick with lanyard	1	\$0.00	\$0.00
HUS VM B/E I/O Module	4	\$1,393.00	\$5,572.00
HUS VM Drive Box (SFF)	16	\$6,765.00	\$108,240.00
HUS VM Controller Chassis	1	\$74,000.00	\$74,000.00
HUS VM 600GB SAS 10K RPM HDD SFF for CBSS/DBS-Base	384	\$1,095.00	\$420,480.00
HUS VM 4x8Gbps FC Interface Adapter	8	\$3,267.00	\$26,136.00
LAN Cable 14ft	1	\$0.00	\$0.00
RJ-45 Modular In-Line Coupler 6 Conductor	1	\$4.00	\$4.00
PDU ORU 22xC13 1Phase 208V 30A NEMA L6-30P	4	\$1,236.00	\$4,944.00
Universal rail kit includes left and right rails	17	\$154.00	\$2,618.00
HUS VM Cache Flash Memory Module (supports 160GB)	1	\$9,888.00	\$9,888.00
HUS VM 8GB Cache Module	16	\$2,504.00	\$40,064.00
Hitachi Unified Storage VM Microcode Kit	1	\$0.00	\$0.00
Hitachi Unified Storage VM Product Documentation Library	1	\$0.00	\$0.00
Hardware Components:		---	\$701,673.60
HUS VM Hitachi Base Operating System Base License (20TB)	1	\$27,000.00	\$27,000.00
HUS VM Hitachi Base Operating System 60TB Block License	1	\$55,900.00	\$55,900.00
Software Components:		---	\$82,900.00
HUS VM Service Installation	1	\$2,750.00	\$2,750.00
HUS VM Hardware Maintenance Support - Includes 3 years of Standard Support (24 x 7 x 4 hour response)	1	\$36,333.36	\$36,333.36
HUS VM Storage Software Support - Includes 3 years of Standard Support	1	\$37,305.00	\$37,305.00
Installation and Support:		---	\$76,388.36
Emulex LightPulse Dual Port Fibre Channel Host Bus Adapter LPE12002-M8	12	\$1,380.00	\$16,560.00
Fibre Channel Cables	24	\$21.50	\$516.00
Third Party Components:		---	\$17,076.00

Hardware Components	\$701,673.60	65%	\$245,585.76
Software Components	\$82,900.00	65%	\$29,015.00
Installation & Support	\$76,388.36	0%	\$76,388.36
Third Party Components	\$17,076.00	0%	\$17,076.00
Total:			\$368,065.12

The above pricing includes the following:



- Acknowledgement of new and existing hardware and/or software problems within four hours.
- Onsite presence of a qualified maintenance engineer or provision of a customer replaceable part within four hours of the above acknowledgement for any hardware failure that results in an inoperative Priced Storage Configuration component.

Differences between the Tested Storage Configuration (TSC) and Priced Storage Configuration

There were no differences between the TSC and the Priced Storage Configuration.

Priced Storage Configuration Diagram

12-Emulex LPe12002 dual-port 8 Gb FC

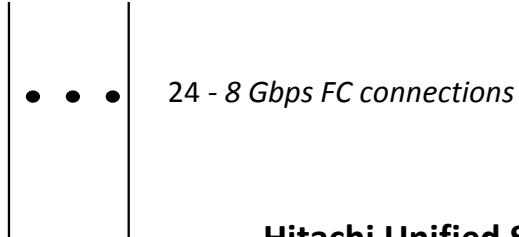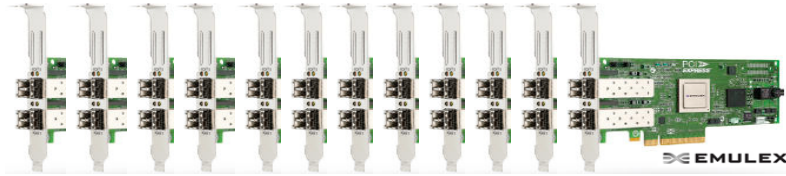

24 - 8 Gbps FC connections



Hitachi Unified Storage VM

1 HiStar-based storage controller with:

2 Main blades with:

64 GB cache per blade (128 GB total)

80 GB flash per blade for cache backup (160 GB total)

2 Microprocessor blades with 8 GB of local memory per blade (16 GB total)

8 -FC Host Port Adapters

(4 -8 Gbps ports per adapter)

(32 ports total)

4 -SAS I/O Modules

(2 -4x6 Gbps ports per module)

(4 -6 Gbps links per port)

(8 links per SAS I/O module, 32 total)

16 -Drive Enclosures

384 -600 GB SAS 10K RPM disk drives

(16 enclosures each with 24 drives)

1-19" Rack with 4 PDUs

Priced Storage Configuration Components

Priced Storage Configuration
12 – Emulex LightPulse LPe12002-M8 8Gbps dual port FC HBAs
Hitachi Unified Storage VM 1 HiStar-based storage controller with: 2 Main blades each with: 64 GB cache per blade (<i>128 GB total</i>) 80 GB flash for cache backup per blade (<i>160 GB total</i>) 1 flash battery (<i>2 total</i>) 2 Microprocessor blades with 8 GB of local memory per blade (<i>16 GB total</i>) 8 – FC Host Port Adapters (<i>4 – 8 Gbps ports per adapter</i>) (<i>16 ports per controller, 32 ports total</i>) (<i>12 ports used per controller, 24 total used</i>) 4 – SAS I/O Modules (<i>2 – 8x6Gbps ports per module</i>) (<i>4 ports per controller, 8 ports total, 8 ports used</i>) (<i>4 – 8x6Gbps links per port</i>) (<i>8 links per module, 32 total links, 32 links used</i>)
16 – Drive Enclosures
384 – 600 GB SAS 10K RPM disk drives (<i>24 disk drives per drive enclosure</i>)
1 – 19” rack with 4 PDUs

CONFIGURATION INFORMATION

This portion of the Full Disclosure Report documents and illustrates the detailed information necessary to recreate the Benchmark Configuration (BC), including the Tested Storage Configuration (TSC), so that the SPC-2 benchmark result produced by the BC may be independently reproduced.

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-2 benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

Benchmark Configuration (BC)/Tested Storage Configuration (TSC) Diagram

Clause 10.6.6

The FDR will contain a one page BC/TSC diagram that illustrates all major components of the BC/TSC.

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) is illustrated on page [23 \(Benchmark Configuration \(BC\)/Tested Storage Configuration \(TSC\) Diagram\)](#).

Storage Network Configuration

Clause 10.6.6.1

If a storage network was configured as a part of the Tested Storage Configuration and the Benchmark Configuration described in Clause 10.6.6 contains a high-level illustration of the network configuration, the Executive Summary will contain a one page topology diagram of the storage network as illustrated in Figure 10.11.

The Benchmark Configuration (BC)/Tested Storage Configuration (TSC) was configured with local storage and, as such, did not employ a storage network.

Host System and Tested Storage Configuration Table


Clause 10.6.6.2

The FDR will contain a table that lists the major components of each Host System and the Tested Storage Configuration.

The components that comprise each Host System and the Tested Storage Configuration are listed in the table that appears on page [24 \(Host System and Tested Storage Configuration Components\)](#).


Benchmark Configuration/Tested Storage Configuration Diagram

6 - Hitachi CB 2000 Model E55A2 blade servers



12 - Emulex LPe12002 dual-port 8 Gb FC HB

(2 HBAs per server)



24 - 8 Gbps FC connections



Hitachi Unified Storage VM

1 HiStar-based storage controller with:

2 Main blades with:

64 GB cache per blade (128 GB total)

80 GB flash per blade for cache backup (160 GB total)

2 Microprocessor blades with 8 GB of local memory per blade (16 GB total)

8 -FC Host Port Adapters

(4 -8 Gbps ports per adapter)

(32 ports total)

4 -SAS I/O Modules

(2 -4x6 Gbps ports per module)

(4 -6 Gbps links per port)

(8 links per SAS I/O module, 32 total)

16 -Drive Enclosures

384 -600 GB SAS 10K RPM disk drives

(16 enclosures each with 24 drives)

1-19" Rack with 4 PDUs

Host System and Tested Storage Configuration Components

Host Systems	Tested Storage Configuration (TSC)
<p>2 – Hitachi Compute Blade 2000 Model E55A2, each with</p> <ul style="list-style-type: none"> 2 – Intel® Xeon® 5690 six core 3.46 GHz processors, 12 MB Intel® SmartCache per processor 64 GB main memory Microsoft Windows Server 2008 R2 Enterprise, Version 6.1.7601 Service Pack 1 Build 7601 PCIe 	<p>12 – Emulex LightPulse LPe12002-M8 8Gbps dual port FC HBAs</p> <hr/> <p>Hitachi Unified Storage VM</p> <ul style="list-style-type: none"> 1 HiStar-based storage controller with <ul style="list-style-type: none"> 2 Main blades each with: <ul style="list-style-type: none"> 64 GB cache per blade (<i>128 GB total</i>) 80 GB flash for cache backup per blade (<i>160 GB total</i>) 1 flash battery (<i>2 total</i>) 2 Microprocessor blades with 8 GB of local memory per blade (<i>16 GB total</i>) 8 – FC Host Port Adapters <ul style="list-style-type: none"> (<i>4 – 8 Gbps ports per adapter</i>) (<i>16 ports per controller, 32 ports total</i>) (<i>12 ports used per controller, 24 total used</i>) 4 – SAS I/O Modules <ul style="list-style-type: none"> (<i>2 – 8x6Gbps ports per module</i>) (<i>4 ports per controller, 8 ports total, 8 ports used</i>) (<i>4 – 8x6Gbps links per port</i>) (<i>8 links per module, 32 total links, 32 links used</i>) <hr/> <p>16 – Drive Enclosures</p> <hr/> <p>384 – 600 GB SAS 10K RPM disk drives (<i>24 disk drives per drive enclosure</i>)</p> <hr/> <p>1 – 19” rack with 4 PDUs</p>

Customer Tunable Parameters and Options

Clause 10.6.7.1

All Benchmark Configuration (BC) components with customer tunable parameter and options that have been altered from their default values must be listed in the FDR. The FDR entry for each of those components must include both the name of the component and the altered value of the parameter or option. If the parameter name is not self-explanatory to a knowledgeable practitioner, a brief description of the parameter's use must also be included in the FDR entry.

[Appendix B: Customer Tunable Parameters and Options](#) on page 68 contains the customer tunable parameters and options that have been altered from their default values for this benchmark.

Tested Storage Configuration (TSC) Creation and Configuration

Clause 10.6.7.2

The Full Disclosure Report must include sufficient information to recreate the logical representation of the Tested Storage Configuration (TSC). In addition to customer tunable parameters and options (Clause 10.6.6.1), that information must include, at a minimum:

- A diagram and/or description of the following:
 - All physical components that comprise the TSC. Those components are also illustrated in the BC Configuration Diagram in Clause 10.6.5.7 and the Storage Network Configuration Diagram in Clause 10.6.5.8.
 - The logical representation of the TSC, configured from the above components that will be presented to the SPC-2 Workload Generator.
- Listings of scripts used to create the logical representation of the TSC.
- If scripts were not used, a description of the process used with sufficient detail to recreate the logical representation of the TSC.

[Appendix C: Tested Storage Configuration \(TSC\) Creation](#) on page 69 contains the detailed information that describes how to create and configure the logical TSC.

SPC-2 Workload Generator Storage Configuration

Clause 10.6.7.3

The Full Disclosure Report will include all SPC-2 Workload Generator storage configuration commands and parameters used in the SPC-2 benchmark measurement.

The SPC-2 Workload Generator storage configuration commands and parameters for this measurement appear in [Appendix D: SPC-2 Workload Generator Storage Commands and Parameter Files](#) on page 84.

ASU Pre-Fill

Clause 6.3.3

The SPC-2 ASU is required to be completely filled with specified content prior to the execution of audited SPC-2 Tests. The content is required to consist of random data pattern such as that produced by an SPC recommended tool.

...

Clause 6.3.3.3

The required ASU pre-fill must be executed as the first step in the uninterrupted benchmark execution sequence described in Clause 6.4.2. That uninterrupted sequence will consist of: ASU Pre-Fill, Large File Processing, Large Database Query, Video on Demand Delivery and Persistence Test Run 1. The only exception to this requirement is described in Clause 6.3.3.4.

Clause 6.3.3.4

If approved by the Auditor, the Test Sponsor may complete the required ASU pre-fill prior to the execution of the audited SPC-2 Tests and not as part of the SPC-2 Test execution sequence.

The Auditor will verify the required random data pattern content in the ASU prior to the execution of the audited SPC-2 Tests. If that verification fails, the Test Sponsor is required to reload the specified content to the ASU.

The configuration file used to complete the required ASU pre-fill appears in [Appendix D: SPC-2 Workload Generator Storage Commands and Parameter Files](#) on page [84](#).

SPC-2 DATA REPOSITORY

This portion of the Full Disclosure Report presents the detailed information that fully documents the various SPC-2 storage capacities and mappings used in the Tested Storage Configuration. [SPC-2 Data Repository Definitions](#) on page [63](#) contains definitions of terms specific to the SPC-2 Data Repository.

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-2 benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

SPC-2 Storage Capacities and Relationships

Clause 10.6.8.1

Two tables and four charts documenting the storage capacities and relationships of the SPC-2 Storage Hierarchy (Clause 2.1) shall be included in the FDR. ... The capacity value in each chart may be listed as an integer value, for readability, rather than the decimal value listed in the table below.

SPC-2 Storage Capacities

The Physical Storage Capacity consisted of 230,448.870 GB distributed over 384 disk drives each with a formatted capacity of 600.127 GB. There was 3,458.769 GB (1.50%) of Unused Storage within the Physical Storage Capacity. Global Storage Overhead consisted of 5,655.270 GB (2.45%) of the Physical Storage Capacity. There was 0.000 GB (0.00%) of Unused Storage within the Configured Storage Capacity. The Total ASU Capacity utilized 99.96% of the Addressable Storage Capacity resulting in 85.211 GB (0.04%) of Unused Storage within the Addressable Storage Capacity. The Data Protection (*RAID-5*) capacity was 27,666.854 GB of which 27,654.681 GB was utilized. The total Unused Storage was 3,556.153 GB.


Note: The configured Storage Devices may include additional storage capacity reserved for system overhead, which is not accessible for application use. That storage capacity may not be included in the value presented for Physical Storage Capacity.



SPC-2 Storage Capacities		
Storage Hierarchy Component	Units	Capacity
Total ASU Capacity	Gigabytes (GB)	193,582.766
Addressable Storage Capacity	Gigabytes (GB)	193,667.977
Configured Storage Capacity	Gigabytes (GB)	221,334.831
Physical Storage Capacity	Gigabytes (GB)	230,448.870
Data Protection (<i>RAID-5</i>)	Gigabytes (GB)	27,666.977
Required Storage	Gigabytes (GB)	0.000
Global Storage Overhead	Gigabytes (GB)	5,655.270
Total Unused Storage	Gigabytes (GB)	3,556.153


SPC-2 Storage Hierarchy Ratios

	Addressable Storage Capacity	Configured Storage Capacity	Physical Storage Capacity
Total ASU Capacity	99.96%	87.46%	84.00%
Data Protection (<i>mirroring</i>)		12.50%	12.01%
Addressable Storage Capacity		87.50%	84.04%
Required Storage		0.00%	0.00%
Configured Storage Capacity			96.05%
Global Storage Overhead			2.45%
Unused Storage:			
Addressable	0.04%		
Configured		0.00%	
Physical			1.50%

SPC-1 Storage Capacity Charts

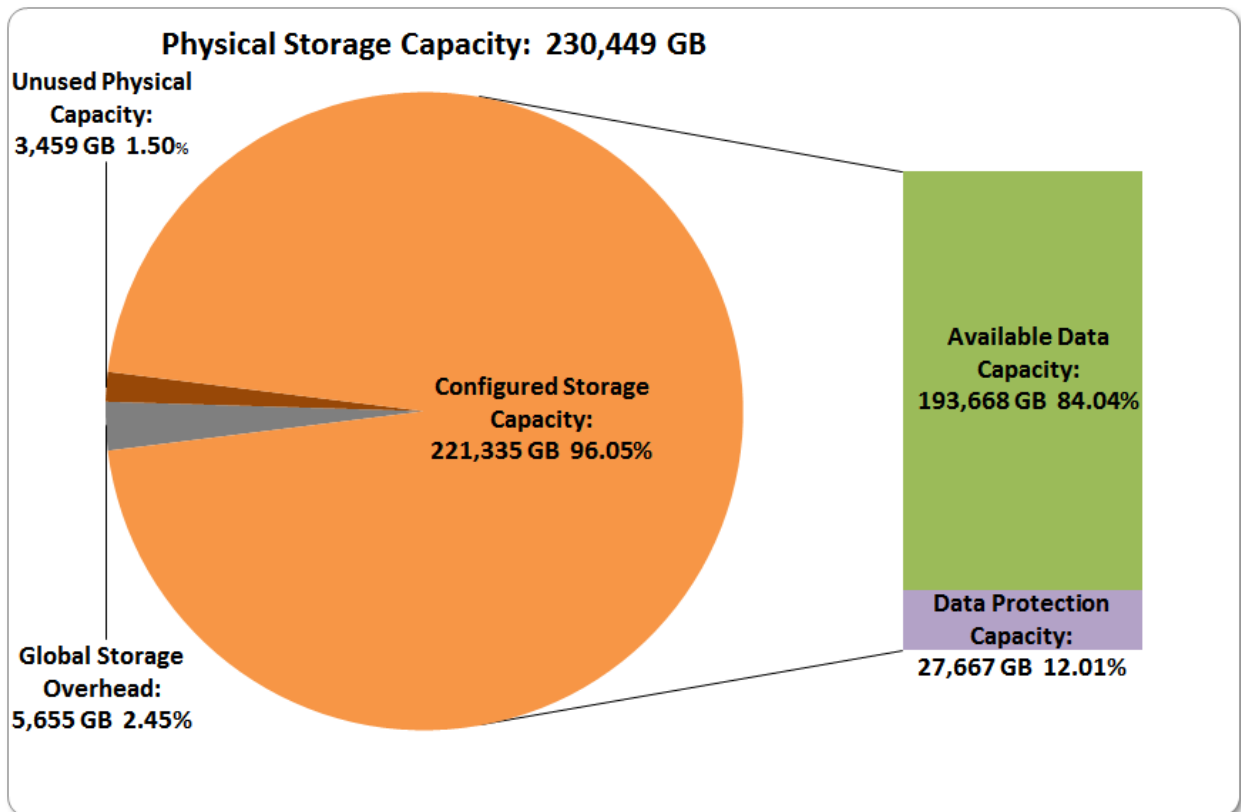

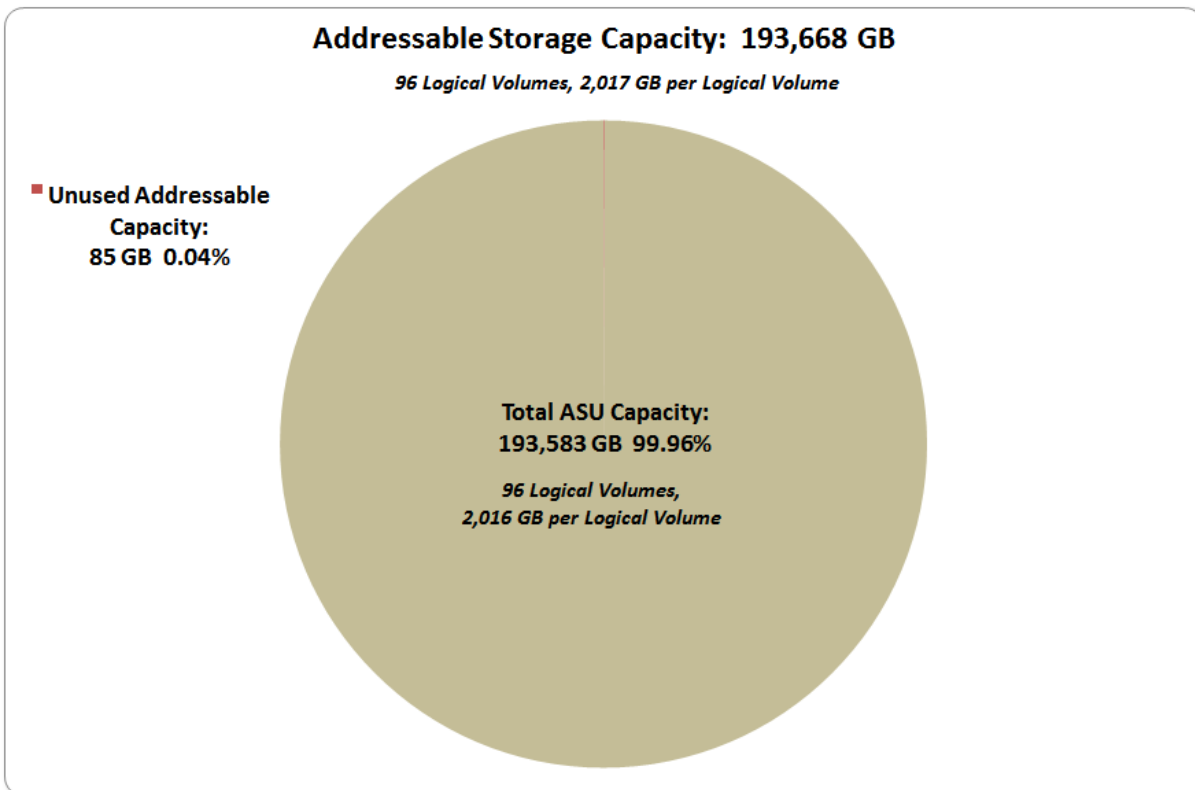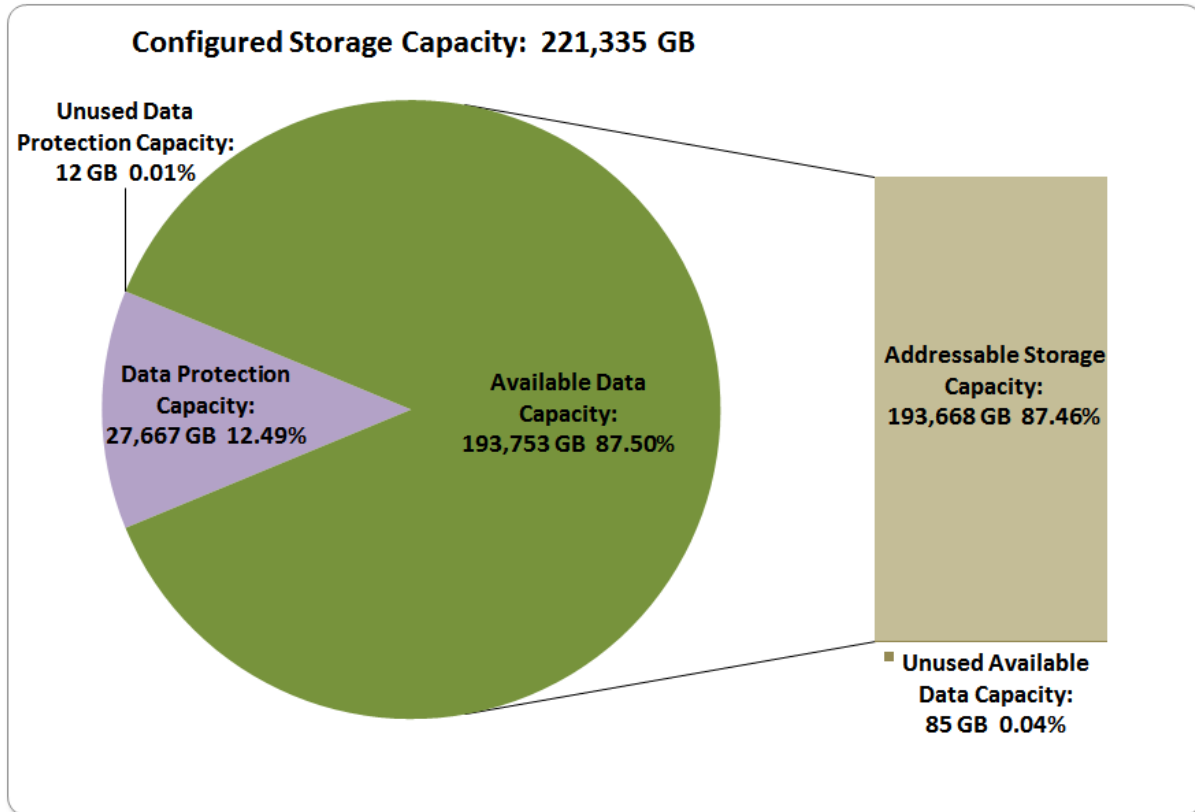

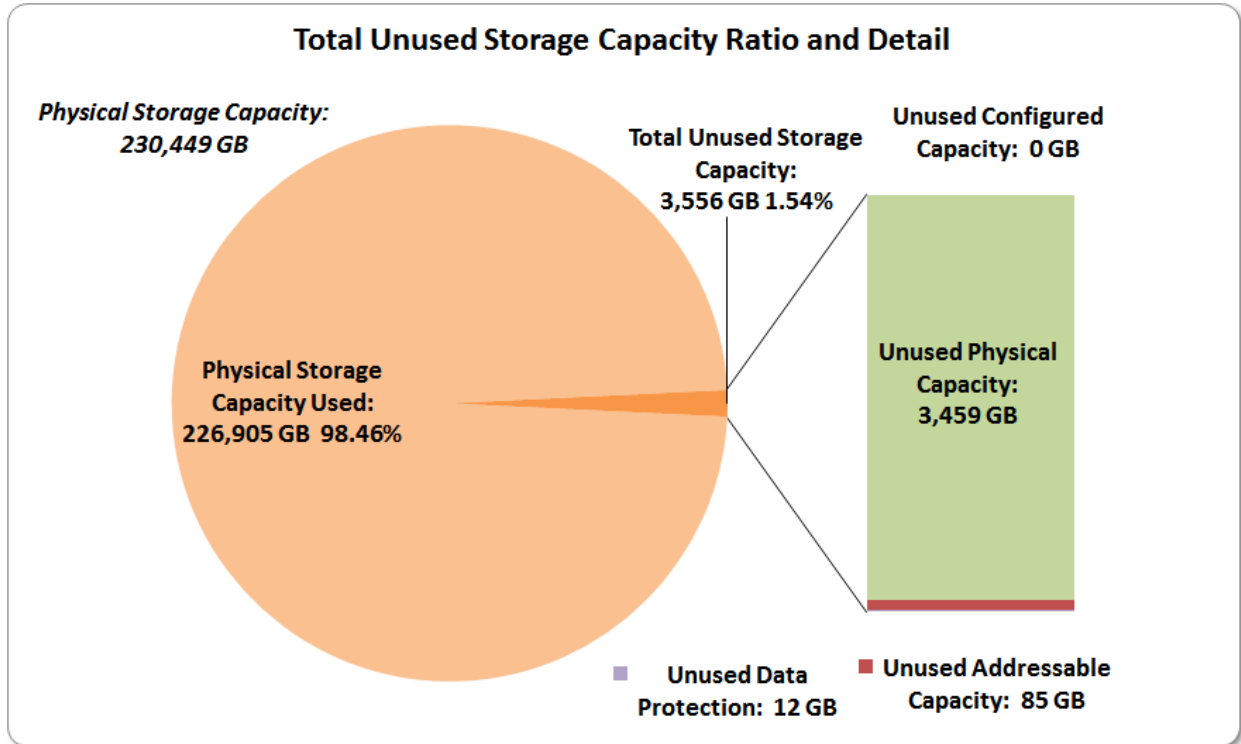

Storage Capacity Utilization

Clause 10.6.8.2

The FDR will include a table illustrating the storage capacity utilization values defined for Application Utilization (Clause 2.8.1), Protected Application Utilization (Clause 2.8.2), and Unused Storage Ratio (Clause 2.8.3).

Clause 2.8.1

Application Utilization is defined as Total ASU Capacity divided by Physical Storage Capacity.

Clause 2.8.2

Protected Application Utilization is defined as (Total ASU Capacity plus total Data Protection Capacity minus unused Data Protection Capacity) divided by Physical Storage Capacity.

Clause 2.8.3

Unused Storage Ratio is defined as Total Unused Capacity divided by Physical Storage Capacity and may not exceed 45%.

SPC-2 Storage Capacity Utilization	
Application Utilization	84.00%
Protected Application Utilization	96.00%
Unused Storage Ratio	1.54%

Logical Volume Capacity and ASU Mapping

Clause 10.6.8.3

A table illustrating the capacity of the Application Storage Unit (ASU) and the mapping of Logical Volumes to ASU will be provided in the FDR. Capacity must be stated in gigabytes (GB) as a value with a minimum of two digits to the right of the decimal point. Each Logical Volume will be sequenced in the table from top to bottom per its position in the contiguous address space of the ASU. Each Logical Volume entry will list its total capacity, the portion of that capacity used for the ASU, and any unused capacity.

Logical Volume (LV) Capacity and Mapping			
ASU (193,667.977 GB)			
	Total Capacity (GB)	Capacity Used (GB)	Capacity Unused (GB)
Logical Volumes 1-96	2,017.375 per LV	2,016.487per LV	0.888 per LV

See the Storage Definition (sd) entries in [Appendix D: SPC-2 Workload Generator Storage Commands and Parameter](#) Files on page [84](#) for more detailed configuration information.

SPC-2 BENCHMARK EXECUTION RESULTS

This portion of the Full Disclosure Report documents the results of the various SPC-2 Tests, Test Phases, Test Run Sequences, and Test Runs. An [SPC-2 glossary](#) on page [63](#) contains definitions of terms specific to the SPC-2 Data Repository.

In each of the following sections of this document, the appropriate Full Disclosure Report requirement, from the SPC-2 benchmark specification, is stated in italics followed by the information to fulfill the stated requirement.

SPC-2 Tests, Test Phases, Test Run Sequences, and Test Runs

The SPC-2 benchmark consists of the following Tests, Test Phases, Test Run Sequences, and Test Runs:

- **Data Persistence Test**
 - Data Persistence Test Run 1
 - Data Persistence Test Run 2
- **Large File Processing Test**
 - WRITE ONLY Test Phase
 - Test Run Sequence 1
 - ✓ Test Run 1 – 1024 KiB Transfer – maximum number of Streams
 - ✓ Test Run 2 – 1024 KiB Transfer – 50% of Test Run 1’s Streams value
 - ✓ Test Run 3 – 1024 KiB Transfer – 25% of Test Run 1’s Streams value
 - ✓ Test Run 4 – 1024 KiB Transfer – 12.5% of Test Run 1’s Streams value
 - ✓ Test Run 5 – 1024 KiB Transfer – single (1) Stream
 - Test Run Sequence 2
 - ✓ Test Run 6 – 256 KiB Transfer – maximum number of Streams
 - ✓ Test Run 7 – 256 KiB Transfer – 50% of Test Run 6’s Streams value
 - ✓ Test Run 8 – 256 KiB Transfer – 25% of Test Run 6’s Streams value
 - ✓ Test Run 9 – 256 KiB Transfer – 12.5% of Test Run 6’s Streams value
 - ✓ Test Run 10 – 256 KiB Transfer – single (1) Stream
 - READ-WRITE Test Phase
 - Test Run Sequence 3
 - ✓ Test Run 11 – 1024 KiB Transfer – maximum number of Streams
 - ✓ Test Run 12 – 1024 KiB Transfer – 50% of Test Run 11’s Streams value
 - ✓ Test Run 13 – 1024 KiB Transfer – 25% of Test Run 11’s Streams value
 - ✓ Test Run 14 – 1024 KiB Transfer – 12.5% of Test Run 11’s Streams value
 - ✓ Test Run 15 – 1024 KiB Transfer – single (1) Stream
 - Test Run Sequence 4
 - ✓ Test Run 16 – 256 KiB Transfer – maximum number of Streams
 - ✓ Test Run 17 – 256 KiB Transfer – 50% of Test Run 16’s Streams value
 - ✓ Test Run 18 – 256 KiB Transfer – 25% of Test Run 16’s Streams value
 - ✓ Test Run 19 – 256 KiB Transfer – 12.5% of Test Run 16’s Streams value
 - ✓ Test Run 20 – 256 KiB Transfer – single (1) Stream
 - READ ONLY Test Phase
 - Test Run Sequence 5
 - ✓ Test Run 21 – 1024 KiB Transfer – maximum number of Streams

- ✓ Test Run 22 – 1024 KiB Transfer – 50% of Test Run 21’s Streams value
- ✓ Test Run 23 – 1024 KiB Transfer – 25% of Test Run 21’s Streams value
- ✓ Test Run 24 – 1024 KiB Transfer – 12.5% of Test Run 21’s Streams value
- ✓ Test Run 25 – 1024 KiB Transfer – single (1) Stream
- Test Run Sequence 6
 - ✓ Test Run 26 – 256 KiB Transfer – maximum number of Streams
 - ✓ Test Run 27 – 256 KiB Transfer – 50% of Test Run 26’s Streams value
 - ✓ Test Run 28 – 256 KiB Transfer – 25% of Test Run 26’s Streams value
 - ✓ Test Run 29 – 256 KiB Transfer – 12.5% of Test Run 26’s Streams value
 - ✓ Test Run 30 – 256 KiB Transfer – single (1) Stream
- **Large Database Query Test**
 - 1024 KIB TRANSFER SIZE Test Phase
 - Test Run Sequence 1
 - ✓ Test Run 1 – 4 I/O Requests Outstanding – maximum number of Streams
 - ✓ Test Run 2 – 4 I/O Requests Outstanding – 50% of Test Run 1’s Streams value
 - ✓ Test Run 3 – 4 I/O Requests Outstanding – 25% of Test Run 1’s Streams value
 - ✓ Test Run 4 – 4 I/O Requests Outstanding – 12.5% of Test Run 1’s Streams value
 - ✓ Test Run 5 – 4 I/O Requests Outstanding – single (1) Stream
 - Test Run Sequence 2
 - ✓ Test Run 6 – 1 I/O Request Outstanding – maximum number of Streams
 - ✓ Test Run 7 – 1 I/O Request Outstanding – 50% of Test Run 6’s Streams value
 - ✓ Test Run 8 – 1 I/O Request Outstanding – 25% of Test Run 6’s Streams value
 - ✓ Test Run 9 – 1 I/O Request Outstanding – 12.5% of Test Run 6’s Streams value
 - ✓ Test Run 10 – 1 I/O Request Outstanding – single (1) Stream
 - 64 KIB TRANSFER SIZE Test Phase
 - Test Run Sequence 3
 - ✓ Test Run 11 – 4 I/O Requests Outstanding – maximum number of Streams
 - ✓ Test Run 12 – 4 I/O Requests Outstanding – 50% of Test Run 11’s Streams value
 - ✓ Test Run 13 – 4 I/O Requests Outstanding – 25% of Test Run 11’s Streams value
 - ✓ Test Run 14 – 4 I/O Requests Outstanding – 12.5% of Test Run 11’s Streams value
 - ✓ Test Run 15 – 4 I/O Requests Outstanding – single (1) Stream
 - Test Run Sequence 4
 - ✓ Test Run 16 – 1 I/O Request Outstanding – maximum number of Streams
 - ✓ Test Run 17 – 1 I/O Request Outstanding – 50% of Test Run 16’s Streams value
 - ✓ Test Run 18 – 1 I/O Request Outstanding – 25% of Test Run 16’s Streams value
 - ✓ Test Run 19 – 1 I/O Request Outstanding – 12.5% of Test Run 16’s Streams value
 - ✓ Test Run 20 – 1 I/O Request Outstanding – single (1) Stream
- **Video on Demand Delivery Test**
 - Video on Demand Delivery Test Run

Each Test is an atomic unit that must be executed from start to finish before any other Test, Test Phase, or Test Run may be executed. The Tests may be executed in any sequence.

The results from each Test, Test Phase, and Test Run are listed below along with a more detailed explanation of each component.

Large File Processing Test

Clause 6.4.3.1

The Large File Processing Test consists of the I/O operations associated with the type of applications, in a wide range of fields, which require simple sequential processing of one or more large files. Specific examples of those types of applications include scientific computing and large-scale financial processing

Clause 6.4.3.2

The Large File Processing Test has three Test Phases, which shall be executed in the following uninterrupted sequence:

1. *WRITE ONLY*
2. *READ-WRITE*
3. *READ ONLY*

The BC shall not be restarted or manually disturbed, altered, or adjusted during the execution of the Large File Processing Test. If power is lost to the BC during this Test all results shall be rendered invalid and the Test re-run in its entirety.

Clause 10.6.9.1

The Full Disclosure Report will contain the following content for the Large File Processing Test:

1. *A listing of the SPC-2 Workload Generator commands and parameters used to execute each of the Test Runs in the Large File Processing Test.*
2. *The human readable SPC-2 Test Results File for each of the Test Runs in the Large File Processing Test.*
3. *The following three tables:*
 - *Average Data Rate: The average Data Rate, in MB per second for the Measurement Interval of each Test Run in the Large File Processing Test.*
 - *Average Data Rate per Stream: The average Data Rate per Stream, in MB per second, for the Measurement Interval of each Test Run in the Large File Processing Test.*
 - *Average Response Time: The average response time, in milliseconds (ms), for the Measurement Interval of each Test Run in the Large File Processing Test.*
4. *Average Data Rate, Average Data Rate per Stream and Average Response Time graphs as defined in Clauses 10.1.1, 10.1.2 and 10.1.3.*

SPC-2 Workload Generator Commands and Parameters

The SPC-2 Workload Generator commands and parameters for the Large File Processing Test Runs are documented in [Appendix E: SPC-2 Workload Generator Execution Commands and Parameters](#) on Page [100](#).

SPC-2 Test Results File


A link to the SPC-2 Test Results file generated from the Large File Processing Test Runs is listed below.

[SPC-2 Large File Processing Test Results File](#)

SPC-2 Large File Processing Average Data Rates (MB/s)

The average Data Rate (MB/s) for each Test Run in the three Test Phases of the SPC-2 Large File Processing Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 1024KiB	598.77	2,235.97	4,089.67	5,611.10	5,605.00
Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 256KiB	343.75	1,259.06	2,479.90	4,498.92	5,602.82
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 1024KiB	593.82	8,018.94	8,080.74	8,178.50	8,148.26
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 256KiB	393.64	7,003.48	7,898.70	8,077.20	8,199.30
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 1024KiB	533.95	11,117.28	12,285.93	12,818.12	12,886.38
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 256KiB	453.14	9,646.94	12,332.35	12,811.71	12,872.31

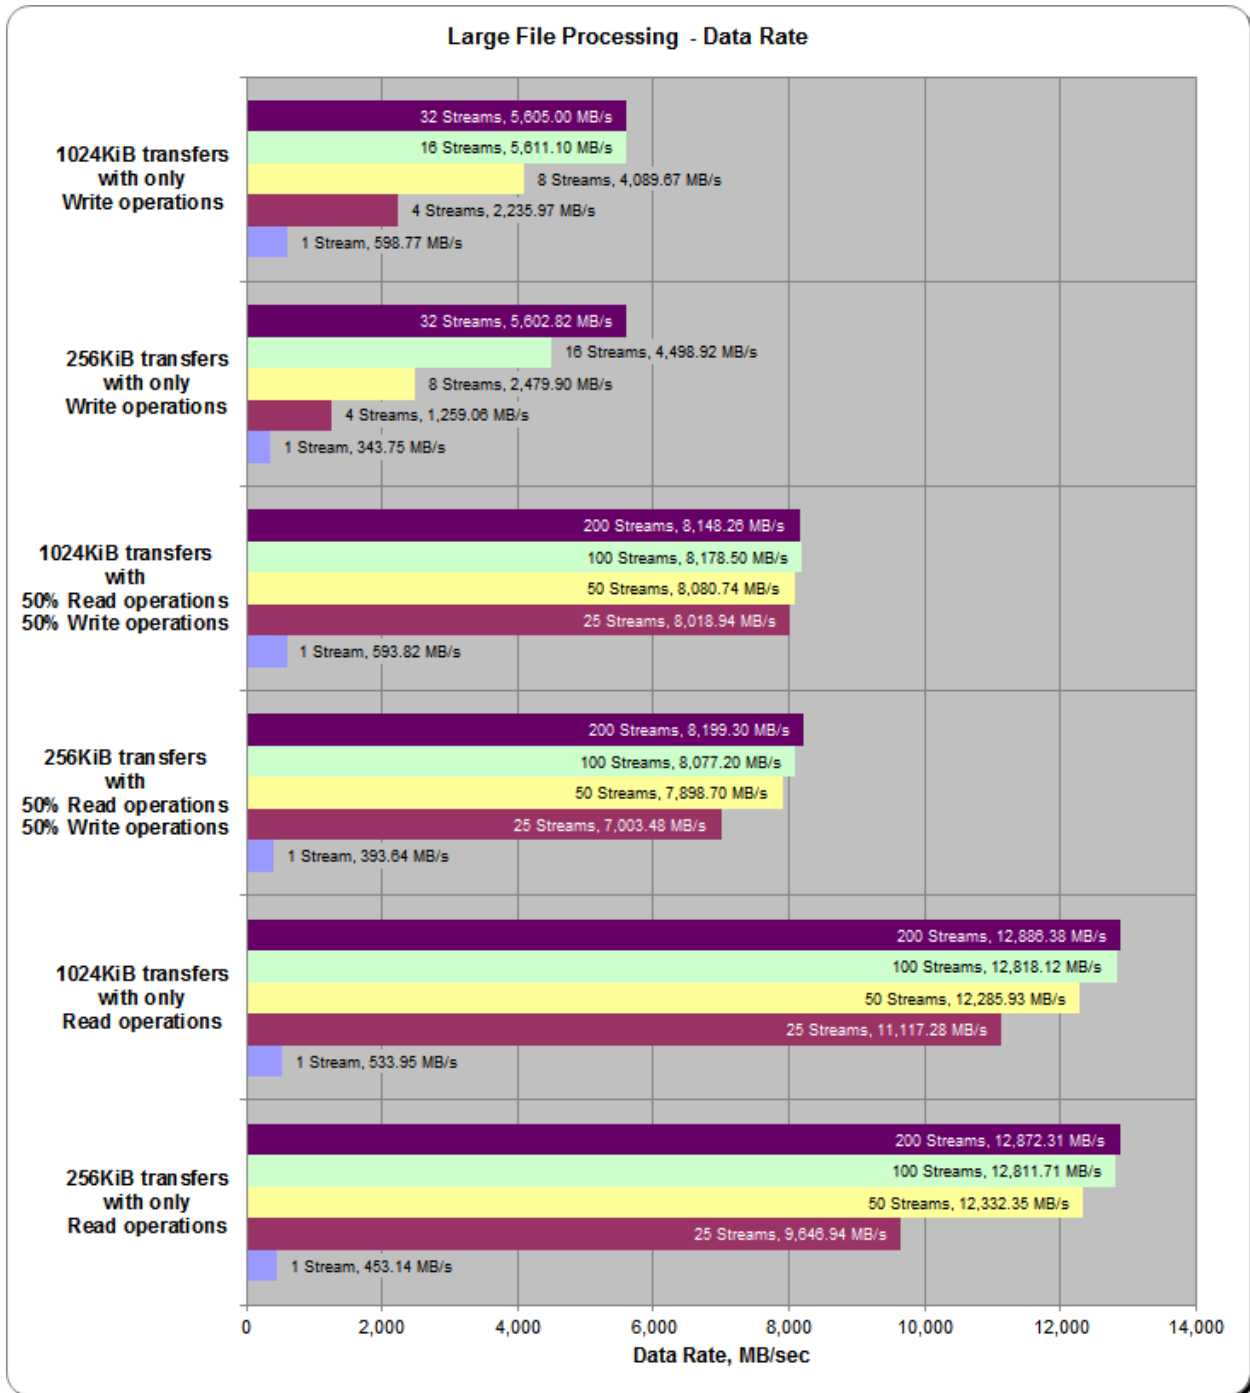


SPC-2 Large File Processing Average Data Rates Graph

SPC-2 Large File Processing Average Data Rate per Stream

The average Data Rate per Stream for each Test Run in the three Test Phases of the SPC-2 Large File Processing Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 1024KiB	598.77	558.99	511.21	350.69	175.16
Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 256KiB	343.75	314.77	309.99	281.18	175.09
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 1024KiB	593.82	320.76	161.61	81.79	40.74
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 256KiB	393.64	280.14	157.97	80.77	41.00
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 1024KiB	533.95	444.69	245.72	128.18	64.43
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 256KiB	453.14	385.88	246.65	128.12	64.36

SPC-2 Large File Processing Average Data Rate per Stream Graph

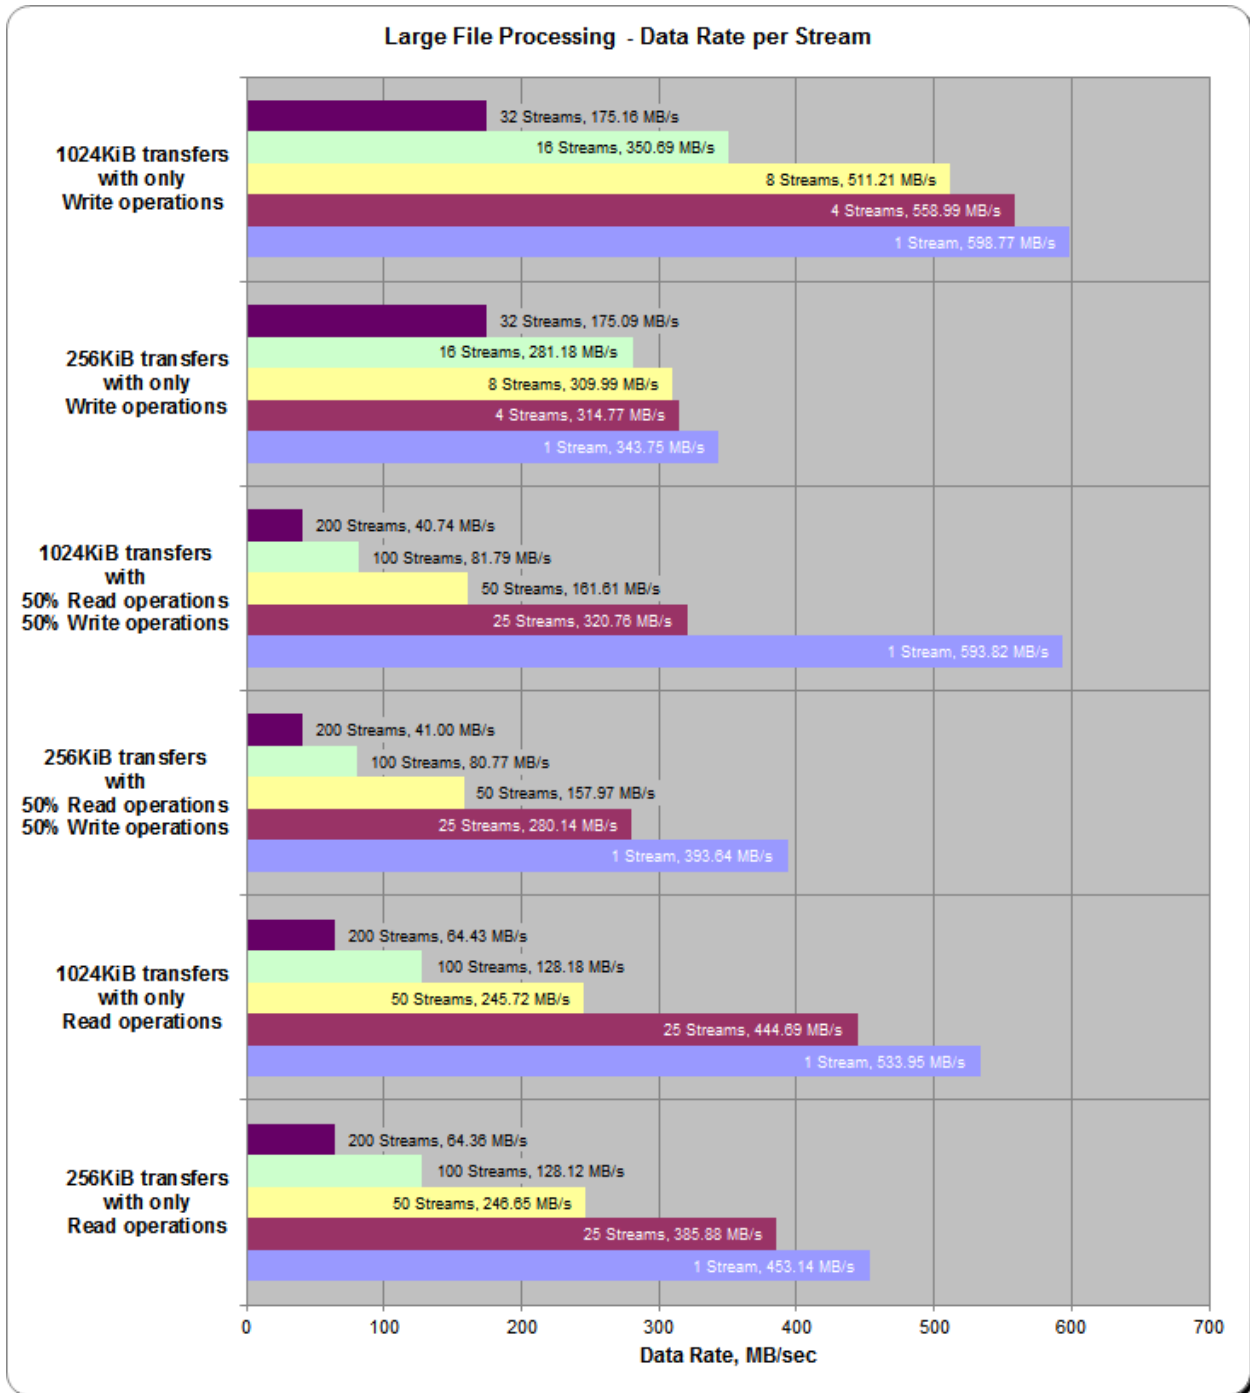


SPC-2 Large File Processing Average Response Time

The average Response Time, milliseconds (ms), for each Test Run in the three Test Phases of the SPC-2 Large File Processing Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 1024KiB	1.75	1.87	2.05	2.99	5.98
Test Run Sequence	1 Stream	4 Streams	8 Streams	16 Streams	32 Streams
Write 256KiB	0.76	0.83	0.84	0.93	1.49
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 1024KiB	1.76	3.26	6.49	12.82	25.73
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read/Write 256KiB	0.66	0.93	1.66	3.24	6.39
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 1024KiB	1.96	2.36	4.26	8.18	16.27
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
Read 256KiB	0.58	0.68	1.06	2.04	4.07

SPC-2 Large File Processing Average Response Time Graph

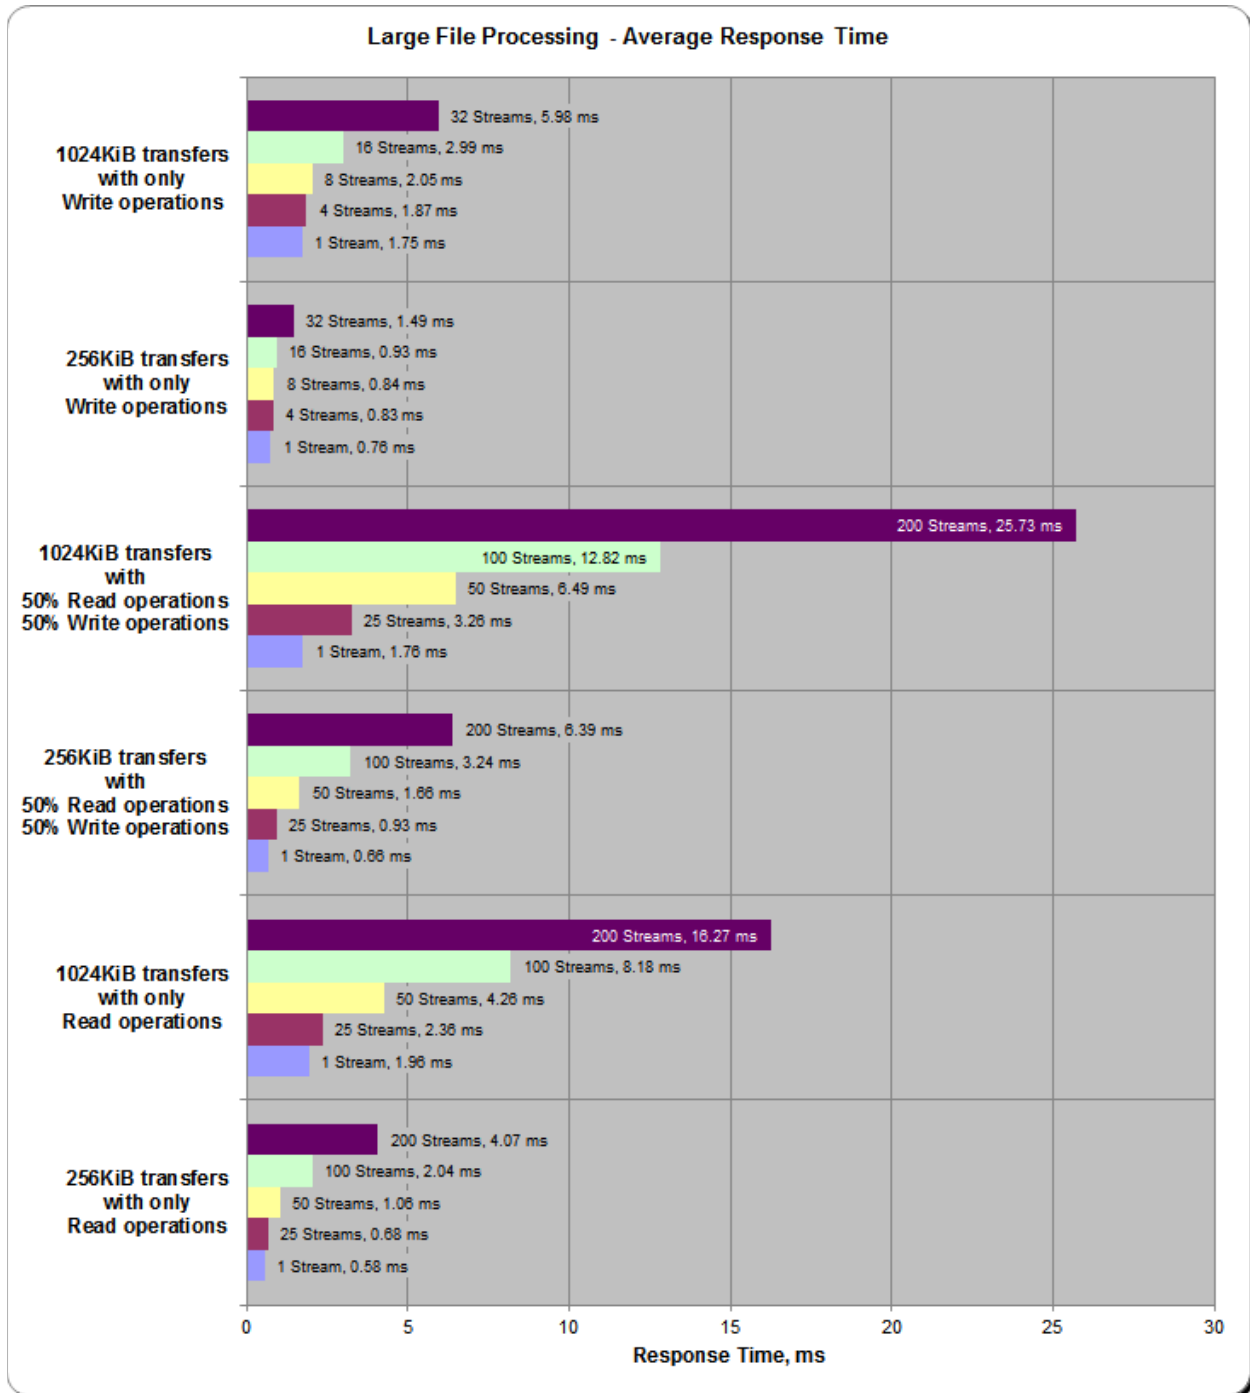

Large File Processing Test – WRITE ONLY Test Phase

Clause 10.6.9.1.1

1. A table that will contain the following information for each "WRITE ONLY, 1024 KiB Transfer Size" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
2. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "WRITE ONLY, 1024 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.
3. A table that will contain the following information for each "WRITE ONLY, 256 KiB Transfer Size" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
4. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "WRITE ONLY, 256 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.

A hyperlink for each of the above tables and graphs may appear in the FDR to provide access to the table or graph.

A hyperlink to a table with the SPC-2 "Large File Processing/WRITE ONLY/1024 KiB Transfer Size" Test Run data appears on the next page. That entry is followed by hyperlinks to graphs illustrating the average Data Rate, average Data Rate per Stream, and average Response Time produced by the same Test Runs. The table and graphs present the data at five-second intervals.

Immediately following the above SPC-2 "Large File Processing/WRITE ONLY/1024 KiB Transfer Size" entries will be hyperlinks for SPC-2 "Large File Processing/WRITE ONLY/256 KiB Transfer Size" table and graphs. The table contains the Test Run data and the graphs illustrate the average Data Rate, average Data Rate per Stream, and average Response Time produced by the Test Runs.

SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/WRITE ONLY/1024 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/WRITE ONLY/256 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

Large File Processing Test – READ-WRITE Test Phase

Clause 10.6.9.1.2

1. *A table that will contain the following information for each "READ-WRITE, 1024 KiB Transfer Size" Test Run:*
 - *The number of Streams specified.*
 - *The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.*
2. *Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "READ-WRITE, 1024 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.*
3. *A table that will contain the following information for each "READ-WRITE, 256 KiB Transfer Size" Test Run:*
 - *The number of Streams specified.*
 - *The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.*
4. *Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "READ-WRITE, 256 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.*

A hyperlink for each of the above tables and graphs may appear in the FDR to provide access to the table or graph.

A hyperlink to a table with the SPC-2 "Large File Processing/READ-WRITE/1024 KiB Transfer Size" Test Run data appears on the next page. That entry is followed by hyperlinks to graphs illustrating the average Data Rate, average Data Rate per Stream, and average Response Time produced by the same Test Runs. The table and graphs present the data at five-second intervals.

Immediately following the above SPC-2 "Large File Processing/READ-WRITE/1024 KiB Transfer Size" entries will be hyperlinks for SPC-2 "Large File Processing/READ-WRITE/256 KiB Transfer Size" table and graphs. The table contains the Test Run data and the graphs illustrate the average Data Rate, average Data Rate per Stream, and average Response Time produced by the Test Runs.

SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/READ-WRITE/1024 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/READ-WRITE/256 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

Large File Processing Test – READ ONLY Test Phase

Clause 10.6.9.1.3

1. A table that will contain the following information for each "READ ONLY, 1024 KiB Transfer Size" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
2. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "READ ONLY, 1024 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.
3. A table that will contain the following information for each "READ ONLY, 256 KiB Transfer Size" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
4. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "READ ONLY, 256 KiB Transfer Size" Test Runs as specified in Clauses 10.1.4 – 10.1.6.

A hyperlink for each of the above tables and graphs may appear in the FDR to provide access to the table or graph.

A hyperlink to a table with the SPC-2 "Large File Processing/READ ONLY/1024 KiB Transfer Size" Test Run data appears on the next page. That entry is followed by hyperlinks to graphs illustrating the average Data Rate, average Data Rate per Stream, and average Response Time produced by the same Test Runs. The table and graphs present the data at five-second intervals.

Immediately following the above SPC-2 "Large File Processing/READ ONLY/1024 KiB Transfer Size" entries will be hyperlinks for SPC-2 "Large File Processing/READ ONLY/256 KiB Transfer Size" table and graphs. The table contains the Test Run data and the graphs illustrate the average Data Rate, average Data Rate per Stream, and average Response Time produced by the Test Runs.

SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/READ ONLY/1024 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” Test Run Data

[SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large File Processing/READ ONLY/256 KiB Transfer Size” graphs](#)
(four pages, 1 graph per page)

Large Database Query Test

Clause 6.4.4.1

The Large Database Query Test is comprised of a set of I/O operations representative of scans or joins of large relational tables such as those performed for data mining or business intelligence.

Clause 6.4.4.2

The Large Database Query Test has two Test Phases, which shall be executed in the following uninterrupted sequence:

- 1. 1024 KiB TRANSFER SIZE*
- 2. 64 KiB TRANSFER SIZE*

The BC shall not be restarted or manually disturbed, altered, or adjusted during the execution of the Large File Processing Test. If power is lost to the BC during this Test all results shall be rendered invalid and the Test re-run in its entirety.

Clause 10.6.9.2

The Full Disclosure Report will contain the following content for the Large Database Query Test:

- 1. A listing of the SPC-2 Workload Generator commands and parameters used to execute each of the Test Runs in the Large Database Query Test.*
- 2. The human readable SPC-2 Test Results File for each of the Test Runs in the Large Database Query Test.*
- 3. A table that contains the following information for each Test Run in the two Test Phases of the Large Database Query Test:*
 - Average Data Rate: The average Data Rate, in MB per second for the Measurement Interval of each Test Run in the Large Database Query Test.*
 - Average Data Rate per Stream: The average Data Rate per Stream, in MB per second, for the Measurement Interval of each Test Run in the Large Database Query Test.*
 - Average Response Time: The average response time, in milliseconds (ms), for the Measurement Interval of each Test Run in the Large Database Query Test.*
- 4. Average Data Rate, Average Data Rate per Stream and Average Response time graphs as defined in Clauses 10.1.1, 10.1.2 and 10.1.3.*

SPC-2 Workload Generator Commands and Parameters

The SPC-2 Workload Generator commands and parameters for the Large Database Query Test Runs are documented in [Appendix E: SPC-2 Workload Generator Execution Commands and Parameters](#) on Page [100](#).

SPC-2 Test Results File

A link to the SPC-2 Test Results file generated from the Large Database Query Test Runs is listed below.


[SPC-2 Large Database Query Test Results File](#)

SPC-2 Large Database Query Average Data Rates (MB/s)

The average Data Rate (MB/s) for each Test Run in the two Test Phases of the SPC-2 Large Database Query Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 4 IOs/Stream	730.51	9,980.99	11,934.89	12,655.08	12,806.07
Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 1 IO/Stream	539.98	7,571.89	11,601.47	12,169.80	12,749.15
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 4 IOs/Stream	551.16	10,739.04	12,070.81	12,608.70	12,711.27
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 1 IO/Stream	266.95	5,751.32	11,222.49	12,613.17	12,730.30

SPC-2 Large Database Query Average Data Rates Graph

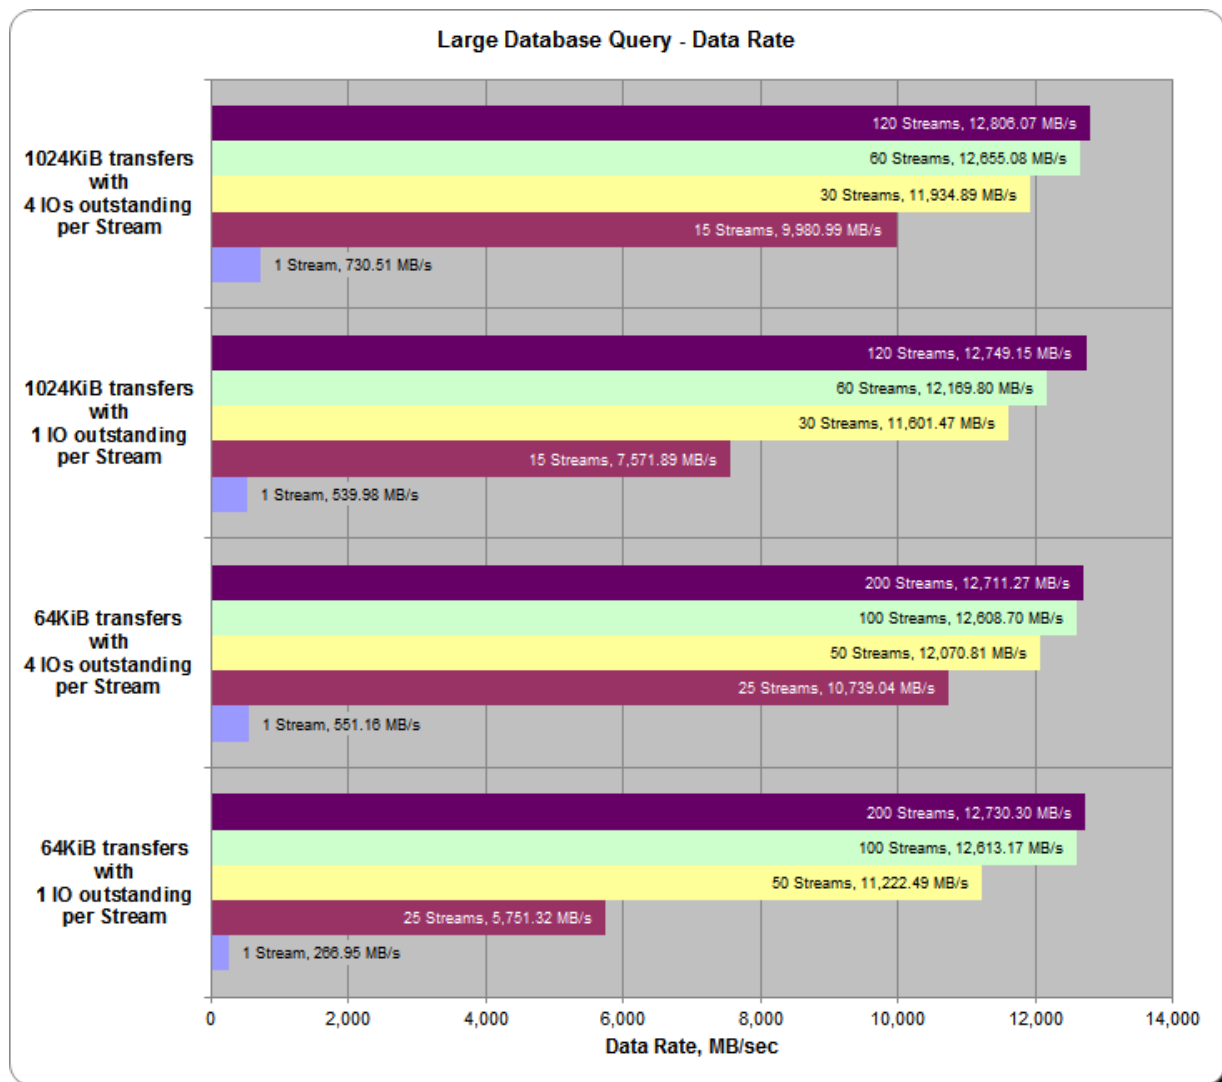


SPC-2 Large Database Query Average Data Rate per Stream

The average Data Rate per Stream for each Test Run in the two Test Phases of the SPC-2 Large Database Query Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 4 IOs/Stream	730.51	665.40	397.83	210.92	106.72
Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 1 IO/Stream	539.98	504.79	386.72	202.83	106.24
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 4 IOs/Stream	551.16	429.56	241.42	126.09	63.56
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 1 IO/Stream	266.95	230.05	224.45	126.13	63.65

SPC-2 Large Database Query Average Data Rate per Stream Graph

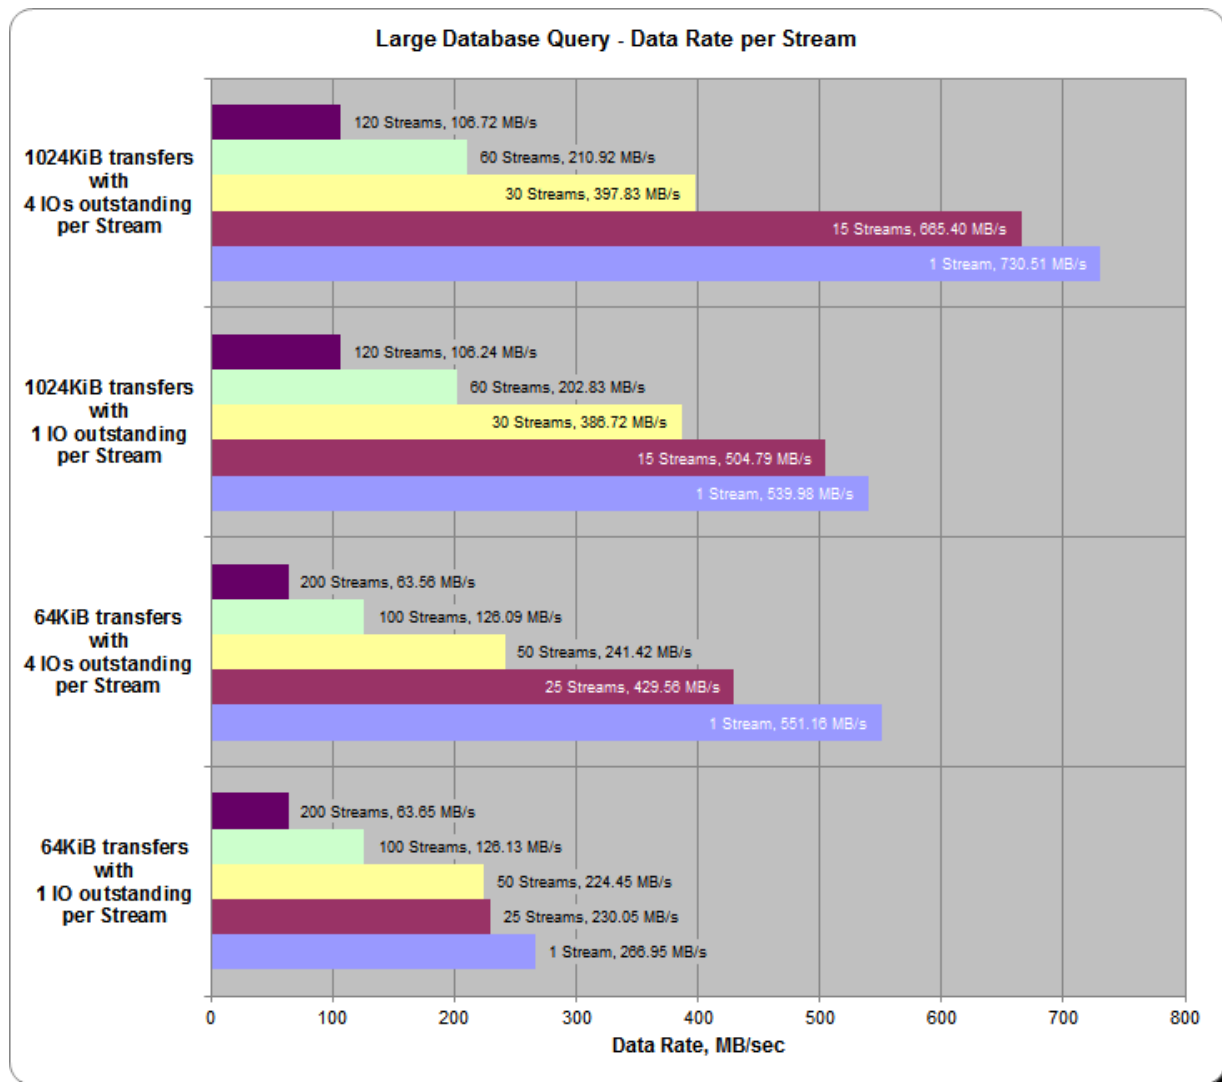


SPC-2 Large Database Query Average Response Time

The average Response Time, in milliseconds, for each Test Run in the two Test Phases of the SPC-2 Large Database Query Test is listed in the table below as well as illustrated in the following graph.

Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 4 IOs/Stream	5.74	6.30	10.54	19.88	39.30
Test Run Sequence	1 Stream	15 Streams	30 Streams	60 Streams	120 Streams
1024KiB w/ 1 IO/Stream	1.94	2.07	2.71	5.17	9.87
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 4 IOs/Stream	0.47	0.61	1.08	2.08	4.12
Test Run Sequence	1 Stream	25 Streams	50 Streams	100 Streams	200 Streams
64KiB w/ 1 IO/Stream	0.24	0.28	0.29	0.52	1.03

SPC-2 Large Database Query Average Response Time Graph

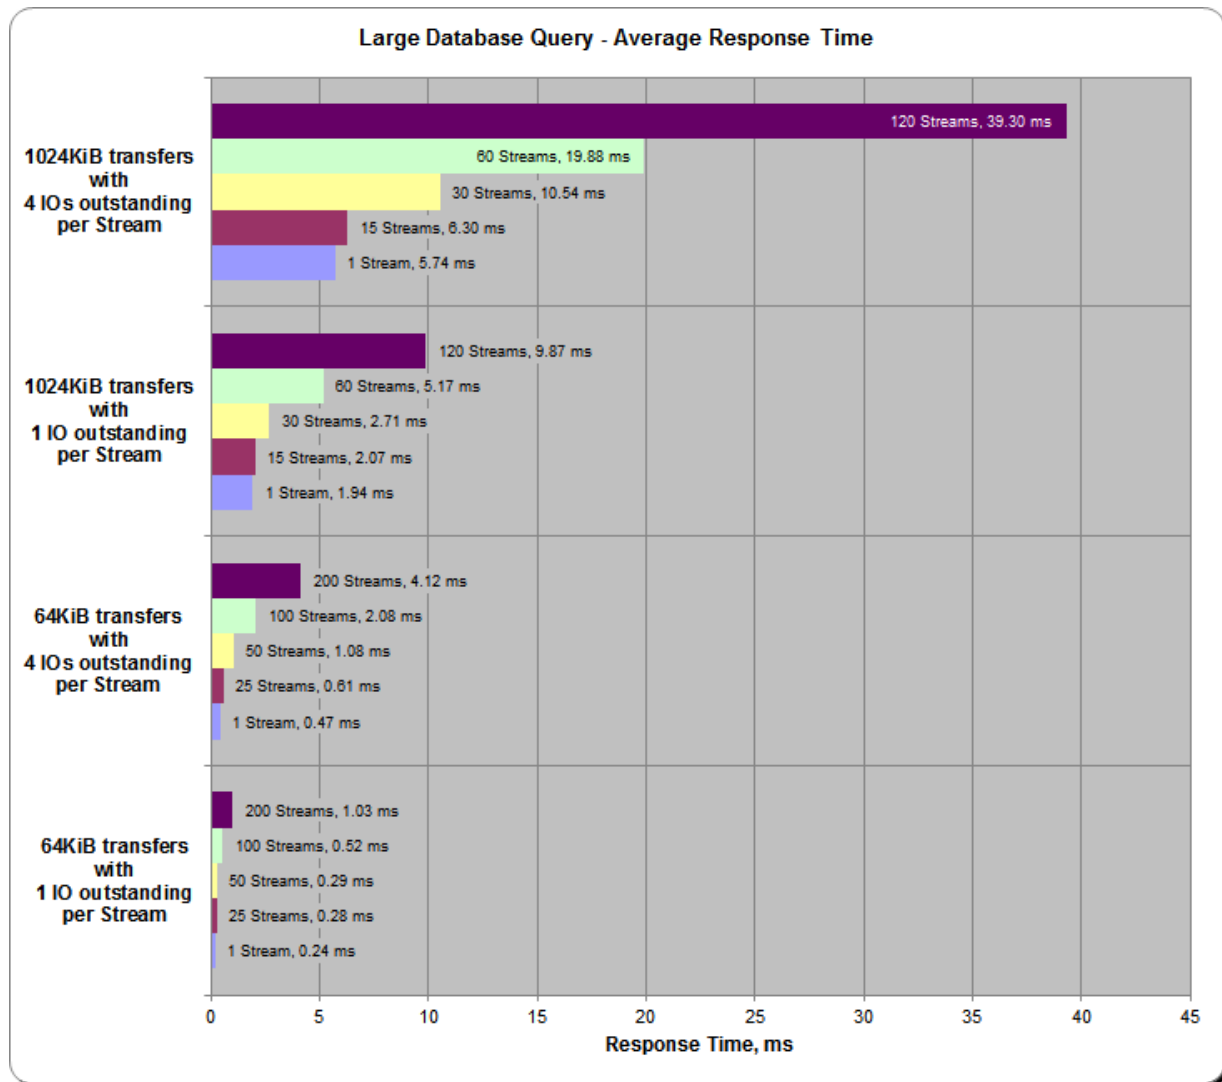

Large Database Query Test – 1024 KiB TRANSFER SIZE Test Phase

Clause 10.6.9.2.1

1. A table that will contain the following information for each "1024 KiB Transfer Size, 4 Outstanding I/Os" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
2. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "1024 KiB Transfer Size, 4 Outstanding I/Os" Test Runs as specified in Clauses 10.1.4 – 10.1.6.
3. A table that will contain the following information for each "1024 KiB Transfer Size, 1 Outstanding I/O" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
4. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "1024 KiB Transfer Size, 1 Outstanding I/O" Test Runs as specified in Clauses 10.1.4 – 10.1.6.

A hyperlink for each of the above tables and graphs may appear in the FDR to provide access to the table or graph.

A hyperlink to a table with the SPC-2 "Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os" Test Run data appears on the next page. That entry is followed by hyperlinks to graphs illustrating the average Data Rate, average Data Rate per Stream, and average Response Time produced by the same Test Runs. The table and graphs present the data at five-second intervals.

Immediately following the above SPC-2 "Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os" entries will be hyperlinks for SPC-2 "Large Database Query/1024 KiB TRANSFER SIZE/1 Outstanding I/O" table and graphs. The table contains the Test Run data and the graphs illustrate the average Data Rate, average Data Rate per Stream, and average Response Time produced by the Test Runs.

SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os” Test Run Data

[SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/4 Outstanding I/Os” graphs](#)
(four pages, 1 graph per page)

SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/1 Outstanding I/O” Test Run Data

[SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/1 Outstanding I/O” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/1 Outstanding I/O” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large Database Query/1024 KiB TRANSFER SIZE/1 Outstanding I/O” graphs](#)
(four pages, 1 graph per page)

Large Database Query Test – 64 KiB TRANSFER SIZE Test Phase

Clause 10.6.9.2.2

1. A table that will contain the following information for each "64 KiB Transfer Size, 4 Outstanding I/Os" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
2. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "64 KiB Transfer Size, 4 Outstanding I/Os" Test Runs as specified in Clauses 10.1.4 – 10.1.6.
3. A table that will contain the following information for each "64 KiB Transfer Size, 1 Outstanding I/O" Test Run:
 - The number of Streams specified.
 - The Average Data Rate, Average Data Rate per Stream, and Average Response Time reported at five second intervals.
4. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the "64 KiB Transfer Size, 1 Outstanding I/O" Test Runs as specified in Clauses 10.1.4 – 10.1.6.

A hyperlink for each of the above tables and graphs may appear in the FDR to provide access to the table or graph.

A hyperlink to a table with the SPC-2 "Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os" Test Run data appears on the next page. That entry is followed by hyperlinks to graphs illustrating the average Data Rate, average Data Rate per Stream, and average Response Time produced by the same Test Runs. The table and graphs present the data at five-second intervals.

Immediately following the above SPC-2 "Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os" entries will be hyperlinks for SPC-2 "Large Database Query/64 KiB TRANSFER SIZE/1 Outstanding I/O" table and graphs. The table contains the Test Run data and the graphs illustrate the average Data Rate, average Data Rate per Stream, and average Response Time produced by the Test Runs.

SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os” Test Run Data

[SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/4 Outstanding I/Os” graphs](#)
(four pages, 1 graph per page)

SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/1 Outstanding I/O” Test Run Data

[SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/1 Outstanding I/O” Test Run Data Tables: Ramp-Up, Measurement Interval, Run-Out, and Ramp-Down Periods](#) (3 pages)

SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/1 Outstanding I/O” Graphs

Average Data Rate – Complete Test Run

Average Data Rate – Measurement Interval (MI) Only

Average Data Rate per Stream

Average Response Time

[SPC-2 “Large Database Query/64 KiB TRANSFER SIZE/1 Outstanding I/O” graphs](#)
(four pages, 1 graph per page)

Video on Demand Delivery Test

Clause 6.4.5.1

The Video on Demand Delivery Test represents the I/O operations required to enable individualized video entertainment for a community of subscribers, which draw from a digital film library.

Clause 6.4.5.2

The Video on Demand Delivery Test consists of one (1) Test Run.

The BC shall not be restarted or manually disturbed, altered, or adjusted during the execution of the Video on Demand Delivery Test. If power is lost to the BC during this Test all results shall be rendered invalid and the Test re-run in its entirety.

Clause 10.6.9.3

The Full Disclosure Report will contain the following content for the Video on Demand Delivery Test:

- 1. A listing of the SPC-2 Workload Generator commands and parameters used to execute the Test Run in the Video on Demand Delivery Test.*
- 2. The human readable SPC-2 Test Results File for the Test Run in the Video on Demand Delivery Test.*
- 3. A table that contains the following information for the Test Run in the Video on Demand Delivery Test:*
 - The number Streams specified.*
 - The Ramp-Up duration in seconds.*
 - The Measurement Interval duration in seconds.*
 - The average data rate, in MB per second, for the Measurement Interval.*
 - The average data rate, in MB per second, per Stream for the Measurement Interval.*
- 4. A table that contains the following information for the single Video on Demand Delivery Test Run:*
 - The number Streams specified.*
 - The average data rate, average data rate per stream, average Response Time, and Maximum Response Time reported at 60 second intervals.*
- 5. Average Data Rate by Intervals, Average Data Rate per Stream by Intervals, and Average Response Time by Intervals graphs for the single Video on Demand Delivery Test Run as specified in Clause 10.1.8.*
- 6. A Maximum Response Time (intervals) graph as specified in Clause 10.1.8.*

SPC-2 Workload Generator Commands and Parameters

The SPC-2 Workload Generator commands and parameters for the Video on Demand Delivery Test Run are documented in [Appendix E: SPC-2 Workload Generator Execution Commands and Parameters](#) on Page [100](#)..

SPC-2 Test Results File

A link to the SPC-2 Test Results file generated from the Video on Demand Delivery Test Run is listed below.

[SPC-2 Video on Demand Delivery Test Results File](#)

SPC-2 Video on Demand Delivery Test Run Data

The number of Streams specified, Ramp-Up duration in seconds, Measurement Interval duration in seconds, average Data Rate for the Measurement Interval, and average Data Rate per Stream for the Measurement Interval are listed in the following table.


SPC-2-VOD	TR1
Number of Streams	15,500
Ramp-up Time, sec	1,200
Measurement Interval, sec	7,200
Average Data Rate, MB/sec	12,189.61
Per Stream Data Rate, MB/sec	0.79
Average Response Time, ms	8.81
Average Max Response Time, ms	374.06

Video on Demand Delivery Test – TEST RUN DATA BY INTERVAL

The SPC-2 Video on Demand Delivery Test Run data is contained in the table that appears below. That table is followed by graphs illustrating the average Data Rate and average Data Rate per Stream produced by the same Test Runs. The table and graphs present the data at sixty second intervals.

TR1	15,500 Streams				TR1	15,500 Streams				TR1	15,500 Streams			
Test Run Sequence Time	Data Rate, MB/sec	Data Rate / Stream, MB/sec	Response Time, ms	Maximum Response Time, ms	Test Run Sequence Time	Data Rate, MB/sec	Data Rate / Stream, MB/sec	Response Time, ms	Maximum Response Time, ms	Test Run Sequence Time	Data Rate, MB/sec	Data Rate / Stream, MB/sec	Response Time, ms	Maximum Response Time, ms
0:01:00	1,181.60	0.67	1.64	49.68	0:48:00	12,190.31	0.79	8.45	384.85	1:35:00	12,189.65	0.79	8.59	346.15
0:02:00	3,271.45	0.77	0.93	45.09	0:49:00	12,189.63	0.79	8.35	338.10	1:36:00	12,189.29	0.79	8.60	378.07
0:03:00	4,519.00	0.78	0.88	55.33	0:50:00	12,189.87	0.79	8.31	425.46	1:37:00	12,189.53	0.79	8.24	380.69
0:04:00	5,471.89	0.78	0.88	58.43	0:51:00	12,189.89	0.79	8.41	405.80	1:38:00	12,189.38	0.79	8.03	353.53
0:05:00	6,271.90	0.78	0.90	70.52	0:52:00	12,188.76	0.79	8.44	370.26	1:39:00	12,189.61	0.79	7.90	340.27
0:06:00	7,006.87	0.78	0.85	65.67	0:53:00	12,189.30	0.79	8.42	395.03	1:40:00	12,189.32	0.79	7.83	315.30
0:07:00	7,689.93	0.78	0.85	71.15	0:54:00	12,189.60	0.79	8.45	359.61	1:41:00	12,188.55	0.79	9.98	381.91
0:08:00	8,311.24	0.78	0.87	79.26	0:55:00	12,189.81	0.79	8.42	368.01	1:42:00	12,189.08	0.79	10.72	379.35
0:09:00	8,885.30	0.78	0.89	80.73	0:56:00	12,189.34	0.79	8.36	361.09	1:43:00	12,189.38	0.79	10.04	370.75
0:10:00	9,419.79	0.78	0.92	92.14	0:57:00	12,189.69	0.79	7.97	335.03	1:44:00	12,189.45	0.79	9.52	365.66
0:11:00	9,925.61	0.78	0.97	121.31	0:58:00	12,189.66	0.79	7.78	304.66	1:45:00	12,189.47	0.79	9.15	409.24
0:12:00	10,401.95	0.78	1.24	159.55	0:59:00	12,188.77	0.79	7.60	299.62	1:46:00	12,189.63	0.79	8.99	445.96
0:13:00	10,855.73	0.78	1.75	178.59	1:00:00	12,189.06	0.79	7.52	338.83	1:47:00	12,189.77	0.79	9.08	374.25
0:14:00	11,289.08	0.79	2.73	215.68	1:01:00	12,189.03	0.79	9.70	395.39	1:48:00	12,189.37	0.79	9.09	387.32
0:15:00	11,704.21	0.79	3.87	259.61	1:02:00	12,189.85	0.79	10.45	353.00	1:49:00	12,190.03	0.79	8.77	343.97
0:16:00	12,091.04	0.79	5.19	386.24	1:03:00	12,189.13	0.79	10.23	390.91	1:50:00	12,189.76	0.79	8.74	362.49
0:17:00	12,189.62	0.79	5.98	389.05	1:04:00	12,189.81	0.79	9.74	446.62	1:51:00	12,189.49	0.79	8.85	353.20
0:18:00	12,189.86	0.79	6.03	326.32	1:05:00	12,189.85	0.79	9.82	405.37	1:52:00	12,190.03	0.79	8.81	352.58
0:19:00	12,189.42	0.79	6.12	373.20	1:06:00	12,189.77	0.79	9.83	388.45	1:53:00	12,189.88	0.79	8.84	371.18
0:20:00	12,189.19	0.79	6.22	323.03	1:07:00	12,189.14	0.79	9.50	435.79	1:54:00	12,189.88	0.79	8.75	379.42
0:21:00	12,189.07	0.79	8.03	382.89	1:08:00	12,189.37	0.79	9.58	380.90	1:55:00	12,189.70	0.79	8.60	362.90
0:22:00	12,189.46	0.79	9.40	369.32	1:09:00	12,189.78	0.79	9.28	377.53	1:56:00	12,190.04	0.79	8.50	340.86
0:23:00	12,188.95	0.79	9.68	406.64	1:10:00	12,189.86	0.79	9.02	354.77	1:57:00	12,189.79	0.79	8.07	307.76
0:24:00	12,189.41	0.79	9.44	387.32	1:11:00	12,190.24	0.79	9.07	387.49	1:58:00	12,189.23	0.79	7.75	312.72
0:25:00	12,189.08	0.79	9.30	476.20	1:12:00	12,190.00	0.79	8.99	375.21	1:59:00	12,189.96	0.79	7.58	320.95
0:26:00	12,189.41	0.79	9.31	429.14	1:13:00	12,189.48	0.79	8.91	461.90	2:00:00	12,189.47	0.79	7.47	332.96
0:27:00	12,189.95	0.79	9.30	394.99	1:14:00	12,189.88	0.79	8.96	382.99	2:01:00	12,189.48	0.79	9.61	405.54
0:28:00	12,189.83	0.79	9.12	384.96	1:15:00	12,189.89	0.79	8.91	412.82	2:02:00	12,189.14	0.79	10.13	405.45
0:29:00	12,189.71	0.79	9.24	371.11	1:16:00	12,189.60	0.79	8.76	361.04	2:03:00	12,189.78	0.79	9.66	382.35
0:30:00	12,189.63	0.79	9.10	409.05	1:17:00	12,189.81	0.79	8.38	348.17	2:04:00	12,189.97	0.79	9.47	375.28
0:31:00	12,189.68	0.79	9.20	408.90	1:18:00	12,189.54	0.79	8.13	351.64	2:05:00	12,189.44	0.79	9.15	340.61
0:32:00	12,190.21	0.79	9.01	373.17	1:19:00	12,189.93	0.79	7.84	331.72	2:06:00	12,189.44	0.79	9.00	326.34
0:33:00	12,189.59	0.79	8.90	378.36	1:20:00	12,189.76	0.79	7.80	327.37	2:07:00	12,189.08	0.79	8.91	360.91
0:34:00	12,189.89	0.79	8.83	365.00	1:21:00	12,189.35	0.79	9.90	391.80	2:08:00	12,189.46	0.79	8.81	358.52
0:35:00	12,190.45	0.79	9.02	589.02	1:22:00	12,189.42	0.79	10.47	401.75	2:09:00	12,189.75	0.79	8.72	352.30
0:36:00	12,189.66	0.79	8.57	441.95	1:23:00	12,189.71	0.79	9.91	366.31	2:10:00	12,189.63	0.79	8.66	350.80
0:37:00	12,189.96	0.79	7.99	345.60	1:24:00	12,189.07	0.79	9.56	406.28	2:11:00	12,189.75	0.79	8.84	343.93
0:38:00	12,189.83	0.79	7.73	358.39	1:25:00	12,189.78	0.79	9.43	434.43	2:12:00	12,190.01	0.79	8.77	373.81
0:39:00	12,189.59	0.79	7.58	331.28	1:26:00	12,189.59	0.79	9.37	385.54	2:13:00	12,189.70	0.79	8.70	322.67
0:40:00	12,189.49	0.79	7.37	338.62	1:27:00	12,189.63	0.79	8.98	353.92	2:14:00	12,189.32	0.79	8.64	364.23
0:41:00	12,189.36	0.79	9.25	433.68	1:28:00	12,189.64	0.79	8.92	415.64	2:15:00	12,189.58	0.79	8.52	364.82
0:42:00	12,190.12	0.79	9.05	387.07	1:29:00	12,189.62	0.79	8.71	362.80	2:16:00	12,189.64	0.79	8.67	345.33
0:43:00	12,190.14	0.79	8.74	413.57	1:30:00	12,189.49	0.79	8.83	388.92	2:17:00	12,189.54	0.79	8.16	338.27
0:44:00	12,189.83	0.79	8.69	408.12	1:31:00	12,188.99	0.79	8.88	408.69	2:18:00	12,189.52	0.79	7.83	308.42
0:45:00	12,189.37	0.79	8.48	370.35	1:32:00	12,189.82	0.79	8.87	341.40	2:19:00	12,189.70	0.79	7.62	331.56
0:46:00	12,189.24	0.79	8.37	378.99	1:33:00	12,188.49	0.79	8.82	337.31	2:20:00	12,189.62	0.79	7.52	303.42
0:47:00	12,189.47	0.79	8.39	381.44	1:34:00	12,189.44	0.79	8.65	355.31	0:00:00	0.00	0.00	0.00	0.00


SPC-2 Video on Demand Delivery Average Data Rate Graph

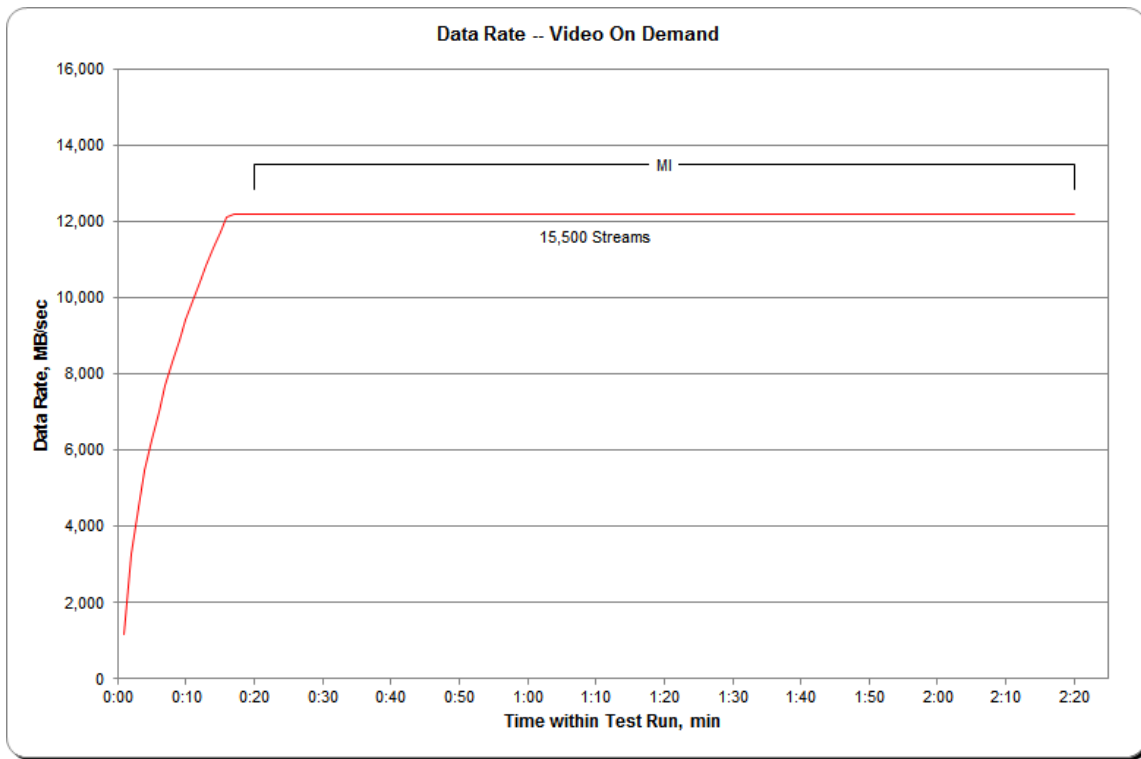


SPC-2 Video on Demand Delivery Average Data Rate per Stream Graph



SPC-2 Video on Demand Delivery Average Response Time Graph

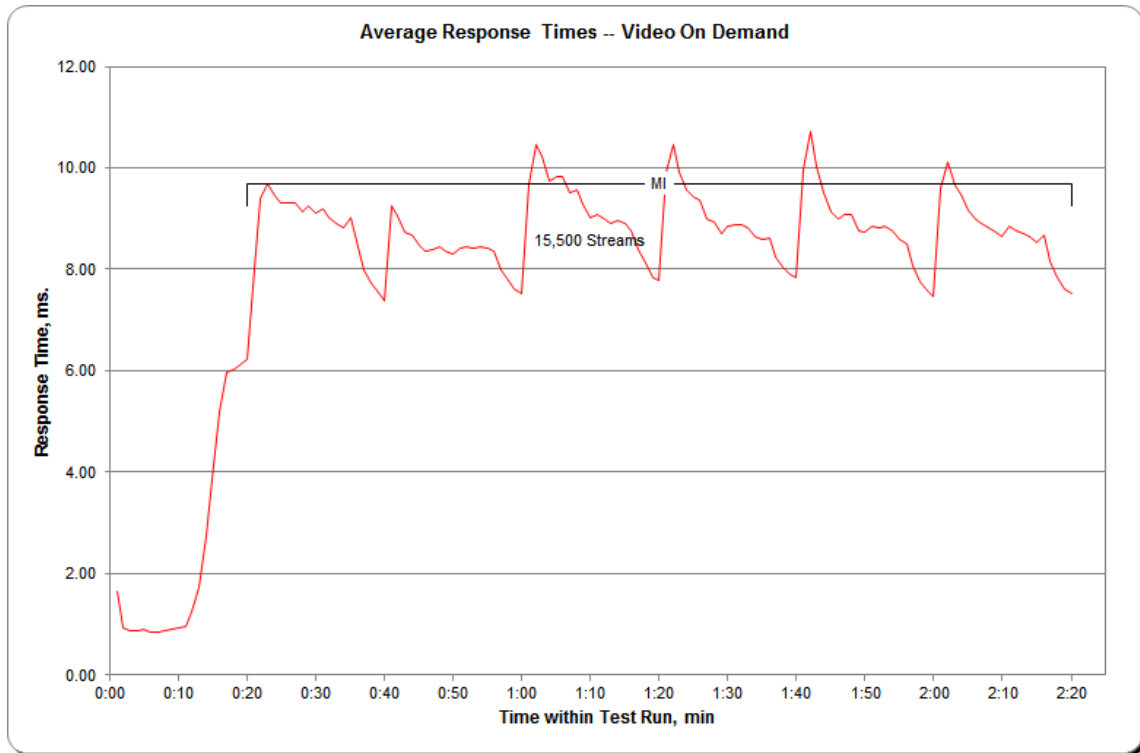

SPC-2 Video on Demand Delivery Maximum Response Time Graph

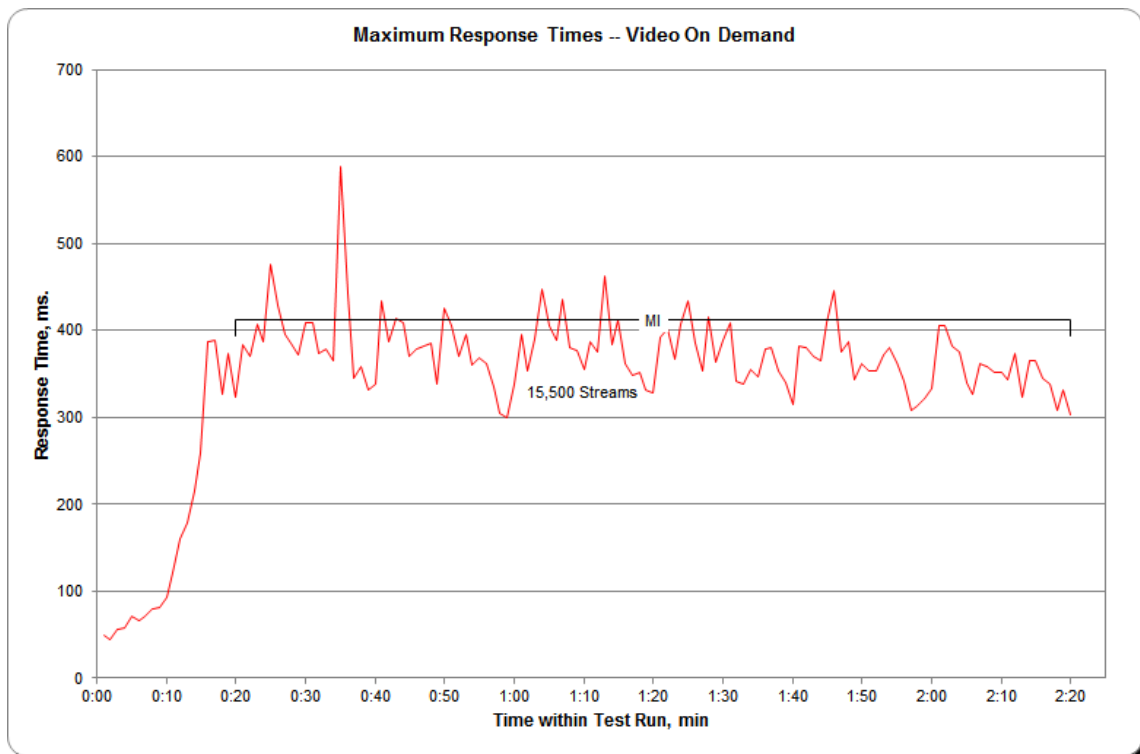

Data Persistence Test

Clause 7

The Data Persistence Test demonstrates the Tested Storage Configuration (TSC):

- *Is capable of maintain data integrity across a power cycle.*
- *Ensures the transfer of data between Logical Volumes and host systems occurs without corruption or loss.*

The SPC-2 Workload Generator will write a specific pattern at randomly selected locations throughout the Total ASU Capacity (Persistence Test Run 1). The SPC-2 Workload Generator will retain the information necessary to later validate the pattern written at each location.

The Tested Storage Configuration will be shutdown and restarted using a power off/power on cycle at the end of the above sequence of write operations. In addition, any caches employing battery backup must be flushed/emptied.

Restart the TSC, and if the Host System(s) were shutdown and powered off, restart the Host System(s).

The SPC-2 Workload Generator will utilize the retained data from Persistence Test Run 1 to verify (Persistence Run 2) the bit patterns written in Persistence Test Run 1 and their corresponding location.

Clause 10.6.9.4

The Full Disclosure Report will contain the following content for the Data Persistence Test:

1. *A listing of the SPC-2 Workload Generator commands and parameters used to execute each of the Test Runs in the Persistence Test.*
2. *The human readable SPC-2 Test Results File for each of the Test Runs in the Data Persistence Test.*
3. *A table from the successful Persistence Test, which contains the results from the test.*

SPC-2 Workload Generator Commands and Parameters

The SPC-2 Workload Generator commands and parameters for the Persistence Test Runs are documented in [Appendix E: SPC-2 Workload Generator Execution Commands and Parameters](#) on Page [100](#).

Data Persistence Test Results File

A link to the test result file generated from each Data Persistence Test Run is listed below.

[Persistence 1 Test Run Results File](#)

[Persistence 2 Test Run Results File](#)

Data Persistence Test Results

Data Persistence Test Results	
Data Persistence Test Number: 1	
Total Number of Logical Blocks Written	1,357,382
Total Number of Logical Blocks Re-referenced	5,057
Total Number of Logical Blocks Verified	1,252,325
Total Number of Logical Blocks that Failed Verification	0
Number of Failed I/O Requests in the process of the Test	0

PRICED STORAGE CONFIGURATION AVAILABILITY DATE

Clause 10.6.9

The committed delivery date for general availability (Availability Date) of all products that comprise the Priced Storage Configuration must be reported. When the Priced Storage Configuration includes products or components with different availability dates, the reported Availability Date must be the date at which all components are committed to be available. All availability dates, whether for individual components or for the Priced Storage Configuration as a whole, must be disclosed to a precision of one day.

The Availability Data shall be stated in either a combination of specific alphanumeric month, numeric day and numeric year or as “Currently Available”.

The Hitachi Unified Storage VM, as documented in this SPC-2 Full Disclosure Report, is currently available for customer purchase and shipment.

ANOMALIES OR IRREGULARITIES

Clause 10.6.12

The FDR shall include a clear and complete description of any anomalies or irregularities encountered in the course of executing the SPC-2 benchmark that may in any way call into question the accuracy, verifiability, or authenticity of information published in this FDR.

There were no anomalies or irregularities encountered during the SPC-2 Onsite Audit of the Hitachi Unified Storage VM.

APPENDIX A: SPC-2 GLOSSARY

“Decimal” (*powers of ten*) Measurement Units

In the storage industry, the terms “kilo”, “mega”, “giga”, “tera”, “peta”, and “exa” are commonly used prefixes for computing performance and capacity. For the purposes of the SPC workload definitions, all of the following terms are defined in “powers of ten” measurement units.

- A kilobyte (KB) is equal to 1,000 (10^3) bytes.
- A megabyte (MB) is equal to 1,000,000 (10^6) bytes.
- A gigabyte (GB) is equal to 1,000,000,000 (10^9) bytes.
- A terabyte (TB) is equal to 1,000,000,000,000 (10^{12}) bytes.
- A petabyte (PB) is equal to 1,000,000,000,000,000 (10^{15}) bytes
- An exabyte (EB) is equal to 1,000,000,000,000,000,000 (10^{18}) bytes

“Binary” (*powers of two*) Measurement Units

The sizes reported by many operating system components use “powers of two” measurement units rather than “power of ten” units. The following standardized definitions and terms are also valid and may be used in this document.

- A kibibyte (KiB) is equal to 1,024 (2^{10}) bytes.
- A mebibyte (MiB) is equal to 1,048,576 (2^{20}) bytes.
- A gibibyte (GiB) is equal to 1,073,741,824 (2^{30}) bytes.
- A tebibyte (TiB) is equal to 1,099,511,627,776 (2^{40}) bytes.
- A pebibyte (PiB) is equal to 1,125,899,906,842,624 (2^{50}) bytes.
- An exbibyte (EiB) is equal to 1,152,921,504,606,846,967 (2^{60}) bytes.

SPC-2 Data Repository Definitions

Total ASU Capacity: The total storage capacity read and written in the course of executing the SPC-2 benchmark.

Application Storage Unit (ASU): The logical interface between the storage and SPC-2 Workload Generator. The ASU is implemented on one or more Logical Volume.

Logical Volume: The division of Addressable Storage Capacity into individually addressable logical units of storage used in the SPC-2 benchmark. Each Logical Volume is implemented as a single, contiguous address space.

Addressable Storage Capacity: The total storage (sum of Logical Volumes) that can be read and written by application programs such as the SPC-2 Workload Generator.

Configured Storage Capacity: This capacity includes the Addressable Storage Capacity and any other storage (parity disks, hot spares, etc.) necessary to implement the Addressable Storage Capacity.

Physical Storage Capacity: The formatted capacity of all storage devices physically present in the Tested Storage Configuration (TSC).

Data Protection Overhead: The storage capacity required to implement the selected level of data protection.

Required Storage: The amount of Configured Storage Capacity required to implement the Addressable Storage Configuration, excluding the storage required for the ASU.

Global Storage Overhead: The amount of Physical Storage Capacity that is required for storage subsystem use and unavailable for use by application programs.

Total Unused Storage: The sum of unused storage capacity within the Physical Storage Capacity, Configured Storage Capacity, and Addressable Storage Capacity.

SPC-2 Data Protection Levels

Protected 1: The single point of failure of any *storage device* in the configuration will not result in permanent loss of access to or integrity of the SPC-2 Data Repository.

Protected 2: The single point of failure of any *component* in the configuration will not result in permanent loss of access to or integrity of the SPC-2 Data Repository.

SPC-2 Test Execution Definitions

Completed I/O Request: An I/O Request with a Start Time and a Completion Time (see [“I/O Completion Types”](#) illustrated below).

Completion Time: The time recorded by the Workload Generator when an I/O Request is completed by the Tested Storage Configuration (TSC) as signaled by System Software.

Data Rate: The data volume, in MB, transferred by all Measured I/O Requests in an SPC-2 Test Run divided by the length of the Test Run in seconds.

Failed I/O Request: Any I/O Request issued by the SPC-2 Workload Generator that meets one of the following conditions (see [“I/O Completion Types”](#) illustrated below):

- The I/O Request was signaled as failed by System Software.
- The I/O Request started within the Measurement Interval, but did not complete prior to the end of the appropriate Run-Out period..
- The I/O Request started within the Run-Out period, but did not complete prior to the end of the appropriate Ramp-Down period.

I/O Request Throughput: The total number of Measured I/O Requests in an SPC-2 Test Run divided by the duration of the Measurement Interval in seconds.

Measured I/O Request: A Completed I/O Request that begins (Start Time) within a Measurement Interval and completes (Completion Time) prior to the end of the appropriate Ramp Down (see [“I/O Completion Types”](#) illustrated below).

Measurement Interval: A specified, contiguous period of time, after the TSC has reached Steady State, when data is collected by the Workload Generator to produce the test results for a SPC-2 Test Run (see [“SPC-2 Test Run Components”](#) illustrated below, *Test Run 1: T_2-T_3 and Test Run 2: T_7-T_8*).

Outstanding I/O Requests: The Outstanding I/O Requests parameter specifies the maximum number of concurrent I/O Requests, associated with a give Stream, which have been issued but not yet completed. (*Clause 3.4.4 of the SPC-2 Benchmark Specification*).

Ramp-Down: A specified, contiguous period of time in which the TSC is required to complete I/O Requests started but not completed during the preceding Run-Out period. Ramp-Down begins at the end of the preceding Run-Out period (see [“SPC-2 Test Run Components”](#) illustrated below, *Test Run 1: T_4-T_5 and Test Run 2: T_9-T_{10}*). The Workload Generator will not submit any I/O Requests during the Ramp-Down.

Ramp-Up: A specified, contiguous period of time required for the Benchmark Configuration (BC) to produce Steady State throughput after the Workload Generator begins submitting I/O Requests to the TSC for execution. The Ramp-Up period ends at the beginning of the Measurement Interval (see [“SPC-2 Test Run Components”](#) illustrated below, *Test Run 1: T_0-T_2 and Test Run 2: T_5-T_7*).

Response Time: The Response Time of a Measured I/O Request is its Completion Time minus its Start Time.

Run-Out: A specified, contiguous period of time in which the TSC is required to complete I/O Requests started but not completed during the preceding Measurement Interval. The Run-Out period begins at the end of the preceding Measurement Interval and is a component of the Steady State period (see [“SPC-2 Test Run Components”](#) illustrated below, *Test Run 1: T_3-T_4 and Test Run 2: T_9-T_{10}*). The Workload Generator will continue to submit I/O Requests at the Test Run’s specified rate during the Run-Out period.

Start Time: The time recorded by the Workload Generator when an I/O Request is submitted, by the Workload Generator, to the System Software for execution on the TSC.

Steady State: The period during which the workload presented to the TSC by the SPC-2 Workload Generator is constant and the resulting TSC I/O Request Throughput is both consistent and sustainable. The Steady State period includes both the Measurement Interval and Run-Out periods (see [“SPC-2 Test Run Components”](#) illustrated below, *Test Run 1: T_1-T_4 and Test Run 2: T_6-T_9*).

Steady State is achieved only after caches in the TSC have filled and as a result the I/O Request Throughput of the TSC has stabilized.

Stream: A collection of Stream Segments that started within a Test Run.

Stream Segment: A sequentially organized pattern of I/O requests, which transfers a contiguous range of data.

Test: A collection of Test Phases and or Test Runs sharing a common objective.

Test Phase: A collection of one or more SPC-2 Test Runs sharing a common objective and intended to be run in a specific sequence.

Test Run: The execution of SPC-2 that produces specific SPC-2 test results. SPC-2 Test Runs have specified, measured Ramp-Up, Measurement Interval, Run-Out and Ramp-Down periods. "[SPC-2 Test Run Components](#)" (*see below*) illustrates the Ramp-Up, Steady State, Measurement Interval, Run-Out, and Ramp-Down components contained in two uninterrupted SPC-2 Test Runs (*Test Run 1: T_0 - T_5 and Test Run 2: T_5 - T_{10}*).

Test Run Sequence: A related sequence of Large File Processing (LFP) or Large Database Query (LDQ) Test Runs. Each Test Run Sequence will consist of five Test Runs, which vary the number of Streams as follows:


- Test Run 1: Maximum number of Streams, which is selected by the Test Sponsor
- Test Run 2: 50% of the maximum number of Streams used in Test Run 1.
- Test Run 3: 25% of the maximum number of Streams used in Test Run 1.
- Test Run 4: 12.5% of the maximum number of Streams used in Test Run 1.
- Test Run 5: 1 Stream.

Each of the five Test Runs in a Test Run Sequence will share the same attributes with the exception of the number of Streams. For example:

- Large File Processing, Read, 1024 KiB Transfer Size: Maximum Streams
- Large File Processing, Read, 1024 KiB Transfer Size: 50% of Maximum Streams
- Large File Processing, Read, 1024 KiB Transfer Size: 25% of Maximum Streams
- Large File Processing, Read, 1024 KiB Transfer Size: 12.5% of Maximum Streams
- Large File Processing, Read, 1024 KiB Transfer Size: 1 Stream


Transfer Size: The Transfer Size parameter specifies the number of bytes in KiB to transfer. (*Clause 3.4.7 of the SPC-2 Benchmark Specification*)

I/O Completion Types

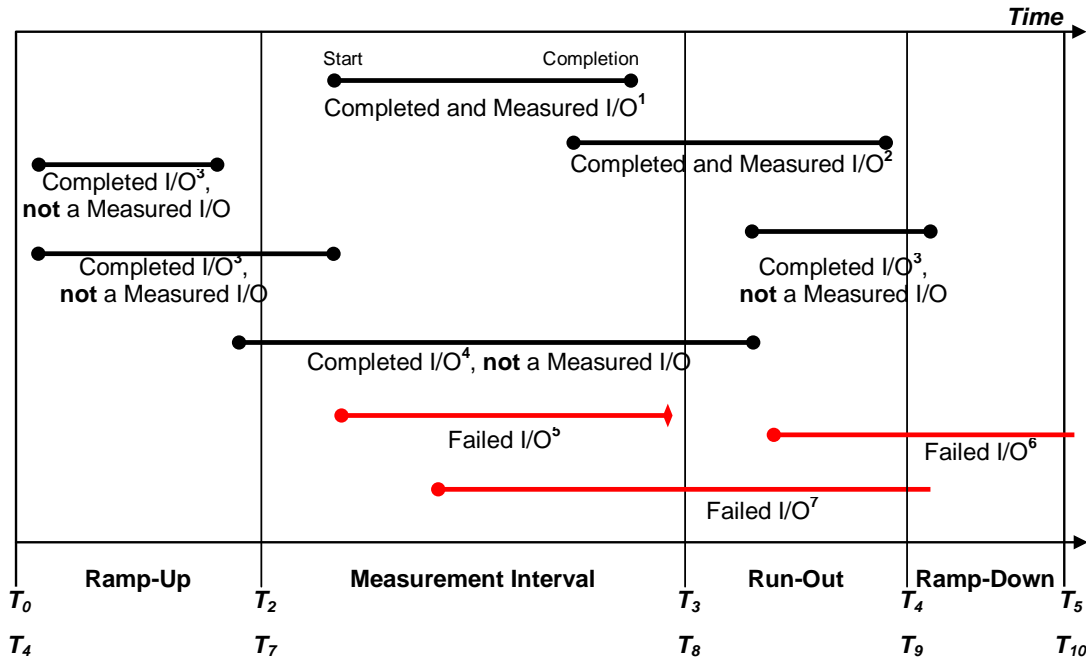

- Completed and Measured I/O¹:** I/O started and completed within the Measurement Interval.
- Completed and Measured I/O²:** I/O started within the Measurement Interval and completed within Ramp Down.
- Completed I/O³:** I/O started before or after the Measurement Interval – not measured.
- Completed I/O⁴:** I/O started before and completed after the Measurement Interval – not measured.
- Failed I/O⁵:** Signaled as failed by System Software.
- Failed I/O⁶:** I/O did not complete prior to the end of Ramp-Down.
- Failed I/O⁷:** I/O did not complete prior to the end of Run-Out.

SPC-2 Test Run Components

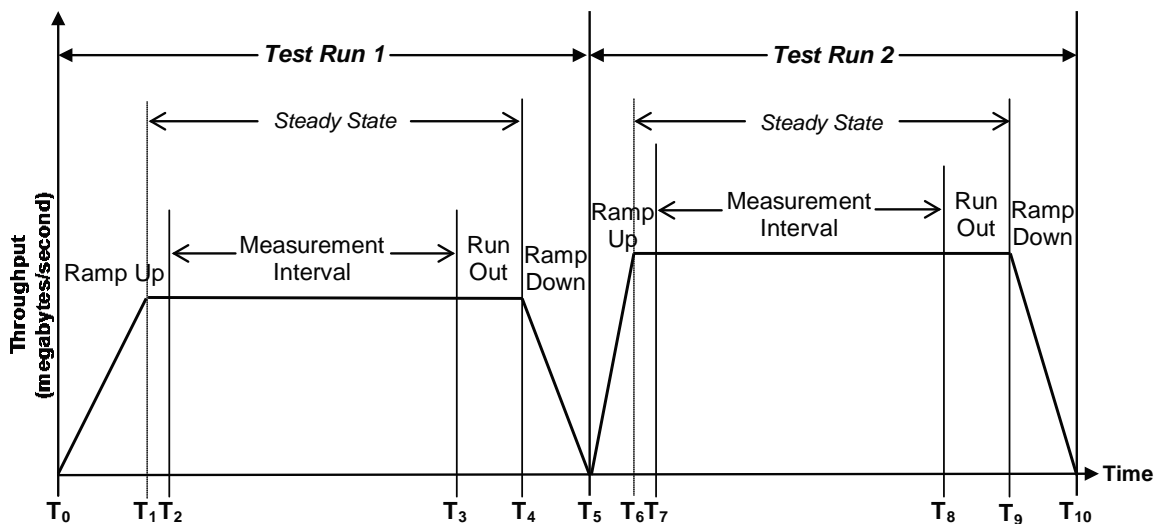

APPENDIX B: CUSTOMER TUNABLE PARAMETERS AND OPTIONS

There were no customer tunable parameters or options changed from their default values for this benchmark execution.

APPENDIX C: TESTED STORAGE CONFIGURATION (TSC) CREATION

All referenced scripts appear at the end of this appendix in the [Referenced Scripts](#) section.

1. Initial Installation and Configuration – Customer Support Engineer

The initial installation and configuration of the Hitachi Unified Storage VM is typically done by a customer support engineer. That initial installation and configuration was completed according to the diagram shown below. Each set of eight disks represents a physical RAID-5 (7D+1P) Parity Group.

Tray15																								
Tray14																								
Tray13	PG 2-5	PG 2-6	PG 2-7	PG 2-8	PG 2-9	PG 2-10	PG 2-11	PG 2-12	PG 2-13	PG 2-14	PG 2-15	PG 2-16												
Tray12																								
Tray11																								
Tray10	PG 1-25	PG 1-26	PG 1-27	PG 1-28	PG 1-29	PG 1-30	PG 1-31	PG 1-32	PG 2-1	PG 2-2	PG 2-3	PG 2-4												
Tray09																								
Tray08																								
Tray07																								
Tray06	PG 1-13	PG 1-14	PG 1-15	PG 1-16	PG 1-17	PG 1-18	PG 1-19	PG 1-20	PG 1-21	PG 1-22	PG 1-23	PG 1-24												
Tray05																								
Tray04																								
Tray03																								
Tray02	PG 1-1	PG 1-2	PG 1-3	PG 1-4	PG 1-5	PG 1-6	PG 1-7	PG 1-8	PG 1-9	PG 1-10	PG 1-11	PG 1-12												
Tray01																								
Tray00																								
Tray Ctrl	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24

2. Installing ‘Hitachi Command Control Interface Software’ to configure HUS VM

- Mount the “Hitachi Command Control Interface Software” CD-ROM on one of the Host Systems.
- Execute the **RAID Manager 01-28-03_06 (HM700 73-01-02-00_00)\RMHORC_X64\Setup.exe** file and follow the steps. The installer will create a directory “**C:\HORCM**”.
- Edit the **C:\HORCM\etc\ horcm.conf** file by replacing the sample contents with the following, where 172.17.17.38 is the IP address of the Host System and 172.17.45.187 is the IP address of the storage array's service processor:

```
HORCM_MON
#ip_address    service    poll(10ms)  timeout(10ms)
172.17.17.38  horcm0    1000        3000
HORCM_CMD
#dev_name      dev_name    dev_name
\\.\IPCMD-172.17.45.187-31001
```

- Save this file as **horcm0.conf** at the same location.
- Copy **horcm0.conf** to the **C:\Windows** directory.
- Open the **C:\Windows\System32\drivers\etc\services** file. Add a port entry as **horcm0 5001/udp** as the last entry in this file as illustrated below. Save the file.

ms-cluster-net	3343/tcp	#Microsoft Cluster Net
ms-cluster-net	3343/udp	#Microsoft Cluster Net
ms-wbt-server	3389/tcp	#MS WBT Server
ms-la	3535/tcp	#Microsoft Class Server
pnrp-port	3540/tcp	#PNRP User Port
teredo	3544/tcp	#Teredo Port
p2pgroup	3587/tcp	#Peer to Peer Grouping
upnp-discovery	3702/tcp	#UPNP v2 Discovery
dvcprov-port	3776/tcp	#Device Provisioning Port
dvcprov-port	3776/udp	#Device Provisioning Port
msfw-control	3847/tcp	#Microsoft Firewall Control
msdts1	3882/tcp	#DTS Service Port
sdp-portmapper	3935/tcp	#SDP Port Mapper Protocol
sdp-portmapper	3935/udp	#SDP Port Mapper Protocol
net-device	4350/tcp	#Net Device
net-device	4350/udp	#Net Device
ipsec-msft	4500/tcp	#Microsoft IPsec NAT-T
ipsec-msft	4500/udp	#Microsoft IPsec NAT-T
dcom	5679/tcp	#Direct Cable Connect Manager
ms-licensing	5720/tcp	#Microsoft Licensing
ms-licensing	5720/udp	#Microsoft Licensing
directplay8	6073/tcp	#DirectPlay8
directplay8	6073/udp	#DirectPlay8
man	9535/tcp	#Remote Man Server
rasadv	9753/udp	
imip-channels	11320/tcp	#IMIP Channels Port
directplaysrvr	47624/tcp	#Direct Play Server
directplaysrvr	47624/udp	#Direct Play Server
horcmu	5001/udp	#CCI reqmnt1

- Open the CMD prompt and change working directory to **C:\HORCM\etc.** (*This is the directory where all the raidcom command scripts resides.*).
- Then issue the following commands:
set horcminst=0
horcmstart.exe 0
raidcom login <user_name> <password> s <seq# number of the array> |
The value for **<seq# number of the array>** for this benchmark execution was 21003.
the value can be obtain from the storage SVP.

3. Creating LDEVs using Hitachi Command Control Interface Software

Execute the [ldevcreate.bat](#) RAID Manager CLI script to create 96 Logical Devices.

4. Format Logical Devices using Hitachi Command Control Interface Software

Format the Logical Devices by executing the [ldevformat.bat](#) RAID Manager CLI script.

5. Map Logical Devices to Host Ports using Hitachi Command Control Interface Software

After the formatting of the Logical Devices is finished, map them to host ports by executing the [lunmap.bat](#) RAID Manager CLI script.

6. Reboot Host Systems

Reboot each Host System to enable discovery of the LUNs.

Referenced Scripts

ldevcreate.bat

```
raidcom add ldev -parity_grp_id 1-1 -ldev_id 00:00 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-1 -ldev_id 00:01 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-2 -ldev_id 00:02 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-2 -ldev_id 00:03 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-3 -ldev_id 00:04 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-3 -ldev_id 00:05 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-4 -ldev_id 00:06 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-4 -ldev_id 00:07 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-5 -ldev_id 00:08 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-5 -ldev_id 00:09 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-6 -ldev_id 00:0A -capacity 3940185088
raidcom add ldev -parity_grp_id 1-6 -ldev_id 00:0B -capacity 3940185088
raidcom add ldev -parity_grp_id 1-7 -ldev_id 00:0C -capacity 3940185088
raidcom add ldev -parity_grp_id 1-7 -ldev_id 00:0D -capacity 3940185088
raidcom add ldev -parity_grp_id 1-8 -ldev_id 00:0E -capacity 3940185088
raidcom add ldev -parity_grp_id 1-8 -ldev_id 00:0F -capacity 3940185088
raidcom add ldev -parity_grp_id 1-9 -ldev_id 00:10 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-9 -ldev_id 00:11 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-10 -ldev_id 00:12 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-10 -ldev_id 00:13 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-11 -ldev_id 00:14 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-11 -ldev_id 00:15 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-12 -ldev_id 00:16 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-12 -ldev_id 00:17 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-13 -ldev_id 00:18 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-13 -ldev_id 00:19 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-14 -ldev_id 00:1A -capacity 3940185088
raidcom add ldev -parity_grp_id 1-14 -ldev_id 00:1B -capacity 3940185088
raidcom add ldev -parity_grp_id 1-15 -ldev_id 00:1C -capacity 3940185088
raidcom add ldev -parity_grp_id 1-15 -ldev_id 00:1D -capacity 3940185088
raidcom add ldev -parity_grp_id 1-16 -ldev_id 00:1E -capacity 3940185088
raidcom add ldev -parity_grp_id 1-16 -ldev_id 00:1F -capacity 3940185088
raidcom add ldev -parity_grp_id 1-17 -ldev_id 00:20 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-17 -ldev_id 00:21 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-18 -ldev_id 00:22 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-18 -ldev_id 00:23 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-19 -ldev_id 00:24 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-19 -ldev_id 00:25 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-20 -ldev_id 00:26 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-20 -ldev_id 00:27 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-21 -ldev_id 00:28 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-21 -ldev_id 00:29 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-22 -ldev_id 00:2A -capacity 3940185088
raidcom add ldev -parity_grp_id 1-22 -ldev_id 00:2B -capacity 3940185088
raidcom add ldev -parity_grp_id 1-23 -ldev_id 00:2C -capacity 3940185088
raidcom add ldev -parity_grp_id 1-23 -ldev_id 00:2D -capacity 3940185088
raidcom add ldev -parity_grp_id 1-24 -ldev_id 00:2E -capacity 3940185088
raidcom add ldev -parity_grp_id 1-24 -ldev_id 00:2F -capacity 3940185088
raidcom add ldev -parity_grp_id 1-25 -ldev_id 00:30 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-25 -ldev_id 00:31 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-26 -ldev_id 00:32 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-26 -ldev_id 00:33 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-27 -ldev_id 00:34 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-27 -ldev_id 00:35 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-28 -ldev_id 00:36 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-28 -ldev_id 00:37 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-29 -ldev_id 00:38 -capacity 3940185088
raidcom add ldev -parity_grp_id 1-29 -ldev_id 00:39 -capacity 3940185088
```

```
raidcom add ldev -parity_grp_id 1-30 -ldev_id 00:3A -capacity 3940185088
raidcom add ldev -parity_grp_id 1-30 -ldev_id 00:3B -capacity 3940185088
raidcom add ldev -parity_grp_id 1-31 -ldev_id 00:3C -capacity 3940185088
raidcom add ldev -parity_grp_id 1-31 -ldev_id 00:3D -capacity 3940185088
raidcom add ldev -parity_grp_id 1-32 -ldev_id 00:3E -capacity 3940185088
raidcom add ldev -parity_grp_id 1-32 -ldev_id 00:3F -capacity 3940185088
raidcom add ldev -parity_grp_id 2-1 -ldev_id 00:40 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-1 -ldev_id 00:41 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-2 -ldev_id 00:42 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-2 -ldev_id 00:43 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-3 -ldev_id 00:44 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-3 -ldev_id 00:45 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-4 -ldev_id 00:46 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-4 -ldev_id 00:47 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-5 -ldev_id 00:48 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-5 -ldev_id 00:49 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-6 -ldev_id 00:4A -capacity 3940185088
raidcom add ldev -parity_grp_id 2-6 -ldev_id 00:4B -capacity 3940185088
raidcom add ldev -parity_grp_id 2-7 -ldev_id 00:4C -capacity 3940185088
raidcom add ldev -parity_grp_id 2-7 -ldev_id 00:4D -capacity 3940185088
raidcom add ldev -parity_grp_id 2-8 -ldev_id 00:4E -capacity 3940185088
raidcom add ldev -parity_grp_id 2-8 -ldev_id 00:4F -capacity 3940185088
raidcom add ldev -parity_grp_id 2-9 -ldev_id 00:50 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-9 -ldev_id 00:51 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-10 -ldev_id 00:52 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-10 -ldev_id 00:53 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-11 -ldev_id 00:54 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-11 -ldev_id 00:55 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-12 -ldev_id 00:56 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-12 -ldev_id 00:57 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-13 -ldev_id 00:58 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-13 -ldev_id 00:59 -capacity 3940185088
raidcom add ldev -parity_grp_id 2-14 -ldev_id 00:5A -capacity 3940185088
raidcom add ldev -parity_grp_id 2-14 -ldev_id 00:5B -capacity 3940185088
raidcom add ldev -parity_grp_id 2-15 -ldev_id 00:5C -capacity 3940185088
raidcom add ldev -parity_grp_id 2-15 -ldev_id 00:5D -capacity 3940185088
raidcom add ldev -parity_grp_id 2-16 -ldev_id 00:5E -capacity 3940185088
raidcom add ldev -parity_grp_id 2-16 -ldev_id 00:5F -capacity 3940185088
```

ldevformat.bat

```
raidcom initialize ldev -ldev_id 00:00 -operation fmt
raidcom initialize ldev -ldev_id 00:01 -operation fmt
raidcom initialize ldev -ldev_id 00:02 -operation fmt
raidcom initialize ldev -ldev_id 00:03 -operation fmt
raidcom initialize ldev -ldev_id 00:04 -operation fmt
raidcom initialize ldev -ldev_id 00:05 -operation fmt
raidcom initialize ldev -ldev_id 00:06 -operation fmt
raidcom initialize ldev -ldev_id 00:07 -operation fmt
raidcom initialize ldev -ldev_id 00:08 -operation fmt
raidcom initialize ldev -ldev_id 00:09 -operation fmt
raidcom initialize ldev -ldev_id 00:0A -operation fmt
raidcom initialize ldev -ldev_id 00:0B -operation fmt
raidcom initialize ldev -ldev_id 00:0C -operation fmt
raidcom initialize ldev -ldev_id 00:0D -operation fmt
raidcom initialize ldev -ldev_id 00:0E -operation fmt
raidcom initialize ldev -ldev_id 00:0F -operation fmt
raidcom initialize ldev -ldev_id 00:10 -operation fmt
raidcom initialize ldev -ldev_id 00:11 -operation fmt
raidcom initialize ldev -ldev_id 00:12 -operation fmt
raidcom initialize ldev -ldev_id 00:13 -operation fmt
raidcom initialize ldev -ldev_id 00:14 -operation fmt
```



```
raidcom initialize ldev -ldev_id 00:15 -operation fmt
raidcom initialize ldev -ldev_id 00:16 -operation fmt
raidcom initialize ldev -ldev_id 00:17 -operation fmt
raidcom initialize ldev -ldev_id 00:18 -operation fmt
raidcom initialize ldev -ldev_id 00:19 -operation fmt
raidcom initialize ldev -ldev_id 00:1A -operation fmt
raidcom initialize ldev -ldev_id 00:1B -operation fmt
raidcom initialize ldev -ldev_id 00:1C -operation fmt
raidcom initialize ldev -ldev_id 00:1D -operation fmt
raidcom initialize ldev -ldev_id 00:1E -operation fmt
raidcom initialize ldev -ldev_id 00:1F -operation fmt
raidcom initialize ldev -ldev_id 00:20 -operation fmt
raidcom initialize ldev -ldev_id 00:21 -operation fmt
raidcom initialize ldev -ldev_id 00:22 -operation fmt
raidcom initialize ldev -ldev_id 00:23 -operation fmt
raidcom initialize ldev -ldev_id 00:24 -operation fmt
raidcom initialize ldev -ldev_id 00:25 -operation fmt
raidcom initialize ldev -ldev_id 00:26 -operation fmt
raidcom initialize ldev -ldev_id 00:27 -operation fmt
raidcom initialize ldev -ldev_id 00:28 -operation fmt
raidcom initialize ldev -ldev_id 00:29 -operation fmt
raidcom initialize ldev -ldev_id 00:2A -operation fmt
raidcom initialize ldev -ldev_id 00:2B -operation fmt
raidcom initialize ldev -ldev_id 00:2C -operation fmt
raidcom initialize ldev -ldev_id 00:2D -operation fmt
raidcom initialize ldev -ldev_id 00:2E -operation fmt
raidcom initialize ldev -ldev_id 00:2F -operation fmt
raidcom initialize ldev -ldev_id 00:30 -operation fmt
raidcom initialize ldev -ldev_id 00:31 -operation fmt
raidcom initialize ldev -ldev_id 00:32 -operation fmt
raidcom initialize ldev -ldev_id 00:33 -operation fmt
raidcom initialize ldev -ldev_id 00:34 -operation fmt
raidcom initialize ldev -ldev_id 00:35 -operation fmt
raidcom initialize ldev -ldev_id 00:36 -operation fmt
raidcom initialize ldev -ldev_id 00:37 -operation fmt
raidcom initialize ldev -ldev_id 00:38 -operation fmt
raidcom initialize ldev -ldev_id 00:39 -operation fmt
raidcom initialize ldev -ldev_id 00:3A -operation fmt
raidcom initialize ldev -ldev_id 00:3B -operation fmt
raidcom initialize ldev -ldev_id 00:3C -operation fmt
raidcom initialize ldev -ldev_id 00:3D -operation fmt
raidcom initialize ldev -ldev_id 00:3E -operation fmt
raidcom initialize ldev -ldev_id 00:3F -operation fmt
raidcom initialize ldev -ldev_id 00:40 -operation fmt
raidcom initialize ldev -ldev_id 00:41 -operation fmt
raidcom initialize ldev -ldev_id 00:42 -operation fmt
raidcom initialize ldev -ldev_id 00:43 -operation fmt
raidcom initialize ldev -ldev_id 00:44 -operation fmt
raidcom initialize ldev -ldev_id 00:45 -operation fmt
raidcom initialize ldev -ldev_id 00:46 -operation fmt
raidcom initialize ldev -ldev_id 00:47 -operation fmt
raidcom initialize ldev -ldev_id 00:48 -operation fmt
raidcom initialize ldev -ldev_id 00:49 -operation fmt
raidcom initialize ldev -ldev_id 00:4A -operation fmt
raidcom initialize ldev -ldev_id 00:4B -operation fmt
raidcom initialize ldev -ldev_id 00:4C -operation fmt
raidcom initialize ldev -ldev_id 00:4D -operation fmt
raidcom initialize ldev -ldev_id 00:4E -operation fmt
raidcom initialize ldev -ldev_id 00:4F -operation fmt
raidcom initialize ldev -ldev_id 00:50 -operation fmt
raidcom initialize ldev -ldev_id 00:51 -operation fmt
raidcom initialize ldev -ldev_id 00:52 -operation fmt
raidcom initialize ldev -ldev_id 00:53 -operation fmt
```

```
raidcom initialize ldev -ldev_id 00:54 -operation fmt
raidcom initialize ldev -ldev_id 00:55 -operation fmt
raidcom initialize ldev -ldev_id 00:56 -operation fmt
raidcom initialize ldev -ldev_id 00:57 -operation fmt
raidcom initialize ldev -ldev_id 00:58 -operation fmt
raidcom initialize ldev -ldev_id 00:59 -operation fmt
raidcom initialize ldev -ldev_id 00:5A -operation fmt
raidcom initialize ldev -ldev_id 00:5B -operation fmt
raidcom initialize ldev -ldev_id 00:5C -operation fmt
raidcom initialize ldev -ldev_id 00:5D -operation fmt
raidcom initialize ldev -ldev_id 00:5E -operation fmt
raidcom initialize ldev -ldev_id 00:5F -operation fmt
```

lunmap.bat

```
raidcom add lun -port CL1-A -ldev_id 00:00
raidcom add lun -port CL1-A -ldev_id 00:01
raidcom add lun -port CL1-A -ldev_id 00:02
raidcom add lun -port CL1-A -ldev_id 00:03
raidcom add lun -port CL1-A -ldev_id 00:04
raidcom add lun -port CL1-A -ldev_id 00:05
raidcom add lun -port CL1-A -ldev_id 00:06
raidcom add lun -port CL1-A -ldev_id 00:07
raidcom add lun -port CL1-A -ldev_id 00:08
raidcom add lun -port CL1-A -ldev_id 00:09
raidcom add lun -port CL1-A -ldev_id 00:0A
raidcom add lun -port CL1-A -ldev_id 00:0B
raidcom add lun -port CL1-A -ldev_id 00:0C
raidcom add lun -port CL1-A -ldev_id 00:0D
raidcom add lun -port CL1-A -ldev_id 00:0E
raidcom add lun -port CL1-A -ldev_id 00:0F
raidcom add lun -port CL1-A -ldev_id 00:10
raidcom add lun -port CL1-A -ldev_id 00:11
raidcom add lun -port CL1-A -ldev_id 00:12
raidcom add lun -port CL1-A -ldev_id 00:13
raidcom add lun -port CL1-A -ldev_id 00:14
raidcom add lun -port CL1-A -ldev_id 00:15
raidcom add lun -port CL1-A -ldev_id 00:16
raidcom add lun -port CL1-A -ldev_id 00:17

raidcom add lun -port CL3-A -ldev_id 00:00
raidcom add lun -port CL3-A -ldev_id 00:01
raidcom add lun -port CL3-A -ldev_id 00:02
raidcom add lun -port CL3-A -ldev_id 00:03
raidcom add lun -port CL3-A -ldev_id 00:04
raidcom add lun -port CL3-A -ldev_id 00:05
raidcom add lun -port CL3-A -ldev_id 00:06
raidcom add lun -port CL3-A -ldev_id 00:07
raidcom add lun -port CL3-A -ldev_id 00:08
raidcom add lun -port CL3-A -ldev_id 00:09
raidcom add lun -port CL3-A -ldev_id 00:0A
raidcom add lun -port CL3-A -ldev_id 00:0B
raidcom add lun -port CL3-A -ldev_id 00:0C
raidcom add lun -port CL3-A -ldev_id 00:0D
raidcom add lun -port CL3-A -ldev_id 00:0E
raidcom add lun -port CL3-A -ldev_id 00:0F
raidcom add lun -port CL3-A -ldev_id 00:10
raidcom add lun -port CL3-A -ldev_id 00:11
raidcom add lun -port CL3-A -ldev_id 00:12
raidcom add lun -port CL3-A -ldev_id 00:13
raidcom add lun -port CL3-A -ldev_id 00:14
raidcom add lun -port CL3-A -ldev_id 00:15
```

```
raidcom add lun -port CL3-A -ldev_id 00:16
raidcom add lun -port CL3-A -ldev_id 00:17

raidcom add lun -port CL5-A -ldev_id 00:00
raidcom add lun -port CL5-A -ldev_id 00:01
raidcom add lun -port CL5-A -ldev_id 00:02
raidcom add lun -port CL5-A -ldev_id 00:03
raidcom add lun -port CL5-A -ldev_id 00:04
raidcom add lun -port CL5-A -ldev_id 00:05
raidcom add lun -port CL5-A -ldev_id 00:06
raidcom add lun -port CL5-A -ldev_id 00:07
raidcom add lun -port CL5-A -ldev_id 00:08
raidcom add lun -port CL5-A -ldev_id 00:09
raidcom add lun -port CL5-A -ldev_id 00:0A
raidcom add lun -port CL5-A -ldev_id 00:0B
raidcom add lun -port CL5-A -ldev_id 00:0C
raidcom add lun -port CL5-A -ldev_id 00:0D
raidcom add lun -port CL5-A -ldev_id 00:0E
raidcom add lun -port CL5-A -ldev_id 00:0F
raidcom add lun -port CL5-A -ldev_id 00:10
raidcom add lun -port CL5-A -ldev_id 00:11
raidcom add lun -port CL5-A -ldev_id 00:12
raidcom add lun -port CL5-A -ldev_id 00:13
raidcom add lun -port CL5-A -ldev_id 00:14
raidcom add lun -port CL5-A -ldev_id 00:15
raidcom add lun -port CL5-A -ldev_id 00:16
raidcom add lun -port CL5-A -ldev_id 00:17

raidcom add lun -port CL1-C -ldev_id 00:00
raidcom add lun -port CL1-C -ldev_id 00:01
raidcom add lun -port CL1-C -ldev_id 00:02
raidcom add lun -port CL1-C -ldev_id 00:03
raidcom add lun -port CL1-C -ldev_id 00:04
raidcom add lun -port CL1-C -ldev_id 00:05
raidcom add lun -port CL1-C -ldev_id 00:06
raidcom add lun -port CL1-C -ldev_id 00:07
raidcom add lun -port CL1-C -ldev_id 00:08
raidcom add lun -port CL1-C -ldev_id 00:09
raidcom add lun -port CL1-C -ldev_id 00:0A
raidcom add lun -port CL1-C -ldev_id 00:0B
raidcom add lun -port CL1-C -ldev_id 00:0C
raidcom add lun -port CL1-C -ldev_id 00:0D
raidcom add lun -port CL1-C -ldev_id 00:0E
raidcom add lun -port CL1-C -ldev_id 00:0F
raidcom add lun -port CL1-C -ldev_id 00:10
raidcom add lun -port CL1-C -ldev_id 00:11
raidcom add lun -port CL1-C -ldev_id 00:12
raidcom add lun -port CL1-C -ldev_id 00:13
raidcom add lun -port CL1-C -ldev_id 00:14
raidcom add lun -port CL1-C -ldev_id 00:15
raidcom add lun -port CL1-C -ldev_id 00:16
raidcom add lun -port CL1-C -ldev_id 00:17

raidcom add lun -port CL3-C -ldev_id 00:00
raidcom add lun -port CL3-C -ldev_id 00:01
raidcom add lun -port CL3-C -ldev_id 00:02
raidcom add lun -port CL3-C -ldev_id 00:03
raidcom add lun -port CL3-C -ldev_id 00:04
raidcom add lun -port CL3-C -ldev_id 00:05
raidcom add lun -port CL3-C -ldev_id 00:06
raidcom add lun -port CL3-C -ldev_id 00:07
raidcom add lun -port CL3-C -ldev_id 00:08
raidcom add lun -port CL3-C -ldev_id 00:09
```

```
raidcom add lun -port CL3-C -ldev_id 00:0A
raidcom add lun -port CL3-C -ldev_id 00:0B
raidcom add lun -port CL3-C -ldev_id 00:0C
raidcom add lun -port CL3-C -ldev_id 00:0D
raidcom add lun -port CL3-C -ldev_id 00:0E
raidcom add lun -port CL3-C -ldev_id 00:0F
raidcom add lun -port CL3-C -ldev_id 00:10
raidcom add lun -port CL3-C -ldev_id 00:11
raidcom add lun -port CL3-C -ldev_id 00:12
raidcom add lun -port CL3-C -ldev_id 00:13
raidcom add lun -port CL3-C -ldev_id 00:14
raidcom add lun -port CL3-C -ldev_id 00:15
raidcom add lun -port CL3-C -ldev_id 00:16
raidcom add lun -port CL3-C -ldev_id 00:17
```

```
raidcom add lun -port CL5-C -ldev_id 00:00
raidcom add lun -port CL5-C -ldev_id 00:01
raidcom add lun -port CL5-C -ldev_id 00:02
raidcom add lun -port CL5-C -ldev_id 00:03
raidcom add lun -port CL5-C -ldev_id 00:04
raidcom add lun -port CL5-C -ldev_id 00:05
raidcom add lun -port CL5-C -ldev_id 00:06
raidcom add lun -port CL5-C -ldev_id 00:07
raidcom add lun -port CL5-C -ldev_id 00:08
raidcom add lun -port CL5-C -ldev_id 00:09
raidcom add lun -port CL5-C -ldev_id 00:0A
raidcom add lun -port CL5-C -ldev_id 00:0B
raidcom add lun -port CL5-C -ldev_id 00:0C
raidcom add lun -port CL5-C -ldev_id 00:0D
raidcom add lun -port CL5-C -ldev_id 00:0E
raidcom add lun -port CL5-C -ldev_id 00:0F
raidcom add lun -port CL5-C -ldev_id 00:10
raidcom add lun -port CL5-C -ldev_id 00:11
raidcom add lun -port CL5-C -ldev_id 00:12
raidcom add lun -port CL5-C -ldev_id 00:13
raidcom add lun -port CL5-C -ldev_id 00:14
raidcom add lun -port CL5-C -ldev_id 00:15
raidcom add lun -port CL5-C -ldev_id 00:16
raidcom add lun -port CL5-C -ldev_id 00:17
```

```
#.....
.....
```

```
raidcom add lun -port CL1-B -ldev_id 00:18
raidcom add lun -port CL1-B -ldev_id 00:19
raidcom add lun -port CL1-B -ldev_id 00:1A
raidcom add lun -port CL1-B -ldev_id 00:1B
raidcom add lun -port CL1-B -ldev_id 00:1C
raidcom add lun -port CL1-B -ldev_id 00:1D
raidcom add lun -port CL1-B -ldev_id 00:1E
raidcom add lun -port CL1-B -ldev_id 00:1F
raidcom add lun -port CL1-B -ldev_id 00:20
raidcom add lun -port CL1-B -ldev_id 00:21
raidcom add lun -port CL1-B -ldev_id 00:22
raidcom add lun -port CL1-B -ldev_id 00:23
raidcom add lun -port CL1-B -ldev_id 00:24
raidcom add lun -port CL1-B -ldev_id 00:25
raidcom add lun -port CL1-B -ldev_id 00:26
raidcom add lun -port CL1-B -ldev_id 00:27
raidcom add lun -port CL1-B -ldev_id 00:28
raidcom add lun -port CL1-B -ldev_id 00:29
raidcom add lun -port CL1-B -ldev_id 00:2A
raidcom add lun -port CL1-B -ldev_id 00:2B
```

```
raidcom add lun -port CL1-B -ldev_id 00:2C
raidcom add lun -port CL1-B -ldev_id 00:2D
raidcom add lun -port CL1-B -ldev_id 00:2E
raidcom add lun -port CL1-B -ldev_id 00:2F
```

```
raidcom add lun -port CL3-B -ldev_id 00:18
raidcom add lun -port CL3-B -ldev_id 00:19
raidcom add lun -port CL3-B -ldev_id 00:1A
raidcom add lun -port CL3-B -ldev_id 00:1B
raidcom add lun -port CL3-B -ldev_id 00:1C
raidcom add lun -port CL3-B -ldev_id 00:1D
raidcom add lun -port CL3-B -ldev_id 00:1E
raidcom add lun -port CL3-B -ldev_id 00:1F
raidcom add lun -port CL3-B -ldev_id 00:20
raidcom add lun -port CL3-B -ldev_id 00:21
raidcom add lun -port CL3-B -ldev_id 00:22
raidcom add lun -port CL3-B -ldev_id 00:23
raidcom add lun -port CL3-B -ldev_id 00:24
raidcom add lun -port CL3-B -ldev_id 00:25
raidcom add lun -port CL3-B -ldev_id 00:26
raidcom add lun -port CL3-B -ldev_id 00:27
raidcom add lun -port CL3-B -ldev_id 00:28
raidcom add lun -port CL3-B -ldev_id 00:29
raidcom add lun -port CL3-B -ldev_id 00:2A
raidcom add lun -port CL3-B -ldev_id 00:2B
raidcom add lun -port CL3-B -ldev_id 00:2C
raidcom add lun -port CL3-B -ldev_id 00:2D
raidcom add lun -port CL3-B -ldev_id 00:2E
raidcom add lun -port CL3-B -ldev_id 00:2F
```

```
raidcom add lun -port CL5-B -ldev_id 00:18
raidcom add lun -port CL5-B -ldev_id 00:19
raidcom add lun -port CL5-B -ldev_id 00:1A
raidcom add lun -port CL5-B -ldev_id 00:1B
raidcom add lun -port CL5-B -ldev_id 00:1C
raidcom add lun -port CL5-B -ldev_id 00:1D
raidcom add lun -port CL5-B -ldev_id 00:1E
raidcom add lun -port CL5-B -ldev_id 00:1F
raidcom add lun -port CL5-B -ldev_id 00:20
raidcom add lun -port CL5-B -ldev_id 00:21
raidcom add lun -port CL5-B -ldev_id 00:22
raidcom add lun -port CL5-B -ldev_id 00:23
raidcom add lun -port CL5-B -ldev_id 00:24
raidcom add lun -port CL5-B -ldev_id 00:25
raidcom add lun -port CL5-B -ldev_id 00:26
raidcom add lun -port CL5-B -ldev_id 00:27
raidcom add lun -port CL5-B -ldev_id 00:28
raidcom add lun -port CL5-B -ldev_id 00:29
raidcom add lun -port CL5-B -ldev_id 00:2A
raidcom add lun -port CL5-B -ldev_id 00:2B
raidcom add lun -port CL5-B -ldev_id 00:2C
raidcom add lun -port CL5-B -ldev_id 00:2D
raidcom add lun -port CL5-B -ldev_id 00:2E
raidcom add lun -port CL5-B -ldev_id 00:2F
```

```
raidcom add lun -port CL1-D -ldev_id 00:18
raidcom add lun -port CL1-D -ldev_id 00:19
raidcom add lun -port CL1-D -ldev_id 00:1A
raidcom add lun -port CL1-D -ldev_id 00:1B
raidcom add lun -port CL1-D -ldev_id 00:1C
raidcom add lun -port CL1-D -ldev_id 00:1D
raidcom add lun -port CL1-D -ldev_id 00:1E
raidcom add lun -port CL1-D -ldev_id 00:1F
```

```
raidcom add lun -port CL1-D -ldev_id 00:20
raidcom add lun -port CL1-D -ldev_id 00:21
raidcom add lun -port CL1-D -ldev_id 00:22
raidcom add lun -port CL1-D -ldev_id 00:23
raidcom add lun -port CL1-D -ldev_id 00:24
raidcom add lun -port CL1-D -ldev_id 00:25
raidcom add lun -port CL1-D -ldev_id 00:26
raidcom add lun -port CL1-D -ldev_id 00:27
raidcom add lun -port CL1-D -ldev_id 00:28
raidcom add lun -port CL1-D -ldev_id 00:29
raidcom add lun -port CL1-D -ldev_id 00:2A
raidcom add lun -port CL1-D -ldev_id 00:2B
raidcom add lun -port CL1-D -ldev_id 00:2C
raidcom add lun -port CL1-D -ldev_id 00:2D
raidcom add lun -port CL1-D -ldev_id 00:2E
raidcom add lun -port CL1-D -ldev_id 00:2F
```

```
raidcom add lun -port CL3-D -ldev_id 00:18
raidcom add lun -port CL3-D -ldev_id 00:19
raidcom add lun -port CL3-D -ldev_id 00:1A
raidcom add lun -port CL3-D -ldev_id 00:1B
raidcom add lun -port CL3-D -ldev_id 00:1C
raidcom add lun -port CL3-D -ldev_id 00:1D
raidcom add lun -port CL3-D -ldev_id 00:1E
raidcom add lun -port CL3-D -ldev_id 00:1F
raidcom add lun -port CL3-D -ldev_id 00:20
raidcom add lun -port CL3-D -ldev_id 00:21
raidcom add lun -port CL3-D -ldev_id 00:22
raidcom add lun -port CL3-D -ldev_id 00:23
raidcom add lun -port CL3-D -ldev_id 00:24
raidcom add lun -port CL3-D -ldev_id 00:25
raidcom add lun -port CL3-D -ldev_id 00:26
raidcom add lun -port CL3-D -ldev_id 00:27
raidcom add lun -port CL3-D -ldev_id 00:28
raidcom add lun -port CL3-D -ldev_id 00:29
raidcom add lun -port CL3-D -ldev_id 00:2A
raidcom add lun -port CL3-D -ldev_id 00:2B
raidcom add lun -port CL3-D -ldev_id 00:2C
raidcom add lun -port CL3-D -ldev_id 00:2D
raidcom add lun -port CL3-D -ldev_id 00:2E
raidcom add lun -port CL3-D -ldev_id 00:2F
```

```
raidcom add lun -port CL5-D -ldev_id 00:18
raidcom add lun -port CL5-D -ldev_id 00:19
raidcom add lun -port CL5-D -ldev_id 00:1A
raidcom add lun -port CL5-D -ldev_id 00:1B
raidcom add lun -port CL5-D -ldev_id 00:1C
raidcom add lun -port CL5-D -ldev_id 00:1D
raidcom add lun -port CL5-D -ldev_id 00:1E
raidcom add lun -port CL5-D -ldev_id 00:1F
raidcom add lun -port CL5-D -ldev_id 00:20
raidcom add lun -port CL5-D -ldev_id 00:21
raidcom add lun -port CL5-D -ldev_id 00:22
raidcom add lun -port CL5-D -ldev_id 00:23
raidcom add lun -port CL5-D -ldev_id 00:24
raidcom add lun -port CL5-D -ldev_id 00:25
raidcom add lun -port CL5-D -ldev_id 00:26
raidcom add lun -port CL5-D -ldev_id 00:27
raidcom add lun -port CL5-D -ldev_id 00:28
raidcom add lun -port CL5-D -ldev_id 00:29
raidcom add lun -port CL5-D -ldev_id 00:2A
raidcom add lun -port CL5-D -ldev_id 00:2B
raidcom add lun -port CL5-D -ldev_id 00:2C
```

```
raidcom add lun -port CL5-D -ldev_id 00:2D  
raidcom add lun -port CL5-D -ldev_id 00:2E  
raidcom add lun -port CL5-D -ldev_id 00:2F
```

#-----

```
raidcom add lun -port CL2-A -ldev_id 00:30  
raidcom add lun -port CL2-A -ldev_id 00:31  
raidcom add lun -port CL2-A -ldev_id 00:32  
raidcom add lun -port CL2-A -ldev_id 00:33  
raidcom add lun -port CL2-A -ldev_id 00:34  
raidcom add lun -port CL2-A -ldev_id 00:35  
raidcom add lun -port CL2-A -ldev_id 00:36  
raidcom add lun -port CL2-A -ldev_id 00:37  
raidcom add lun -port CL2-A -ldev_id 00:38  
raidcom add lun -port CL2-A -ldev_id 00:39  
raidcom add lun -port CL2-A -ldev_id 00:3A  
raidcom add lun -port CL2-A -ldev_id 00:3B  
raidcom add lun -port CL2-A -ldev_id 00:3C  
raidcom add lun -port CL2-A -ldev_id 00:3D  
raidcom add lun -port CL2-A -ldev_id 00:3E  
raidcom add lun -port CL2-A -ldev_id 00:3F  
raidcom add lun -port CL2-A -ldev_id 00:40  
raidcom add lun -port CL2-A -ldev_id 00:41  
raidcom add lun -port CL2-A -ldev_id 00:42  
raidcom add lun -port CL2-A -ldev_id 00:43  
raidcom add lun -port CL2-A -ldev_id 00:44  
raidcom add lun -port CL2-A -ldev_id 00:45  
raidcom add lun -port CL2-A -ldev_id 00:46  
raidcom add lun -port CL2-A -ldev_id 00:47
```

```
raidcom add lun -port CL4-A -ldev_id 00:30  
raidcom add lun -port CL4-A -ldev_id 00:31  
raidcom add lun -port CL4-A -ldev_id 00:32  
raidcom add lun -port CL4-A -ldev_id 00:33  
raidcom add lun -port CL4-A -ldev_id 00:34  
raidcom add lun -port CL4-A -ldev_id 00:35  
raidcom add lun -port CL4-A -ldev_id 00:36  
raidcom add lun -port CL4-A -ldev_id 00:37  
raidcom add lun -port CL4-A -ldev_id 00:38  
raidcom add lun -port CL4-A -ldev_id 00:39  
raidcom add lun -port CL4-A -ldev_id 00:3A  
raidcom add lun -port CL4-A -ldev_id 00:3B  
raidcom add lun -port CL4-A -ldev_id 00:3C  
raidcom add lun -port CL4-A -ldev_id 00:3D  
raidcom add lun -port CL4-A -ldev_id 00:3E  
raidcom add lun -port CL4-A -ldev_id 00:3F  
raidcom add lun -port CL4-A -ldev_id 00:40  
raidcom add lun -port CL4-A -ldev_id 00:41  
raidcom add lun -port CL4-A -ldev_id 00:42  
raidcom add lun -port CL4-A -ldev_id 00:43  
raidcom add lun -port CL4-A -ldev_id 00:44  
raidcom add lun -port CL4-A -ldev_id 00:45  
raidcom add lun -port CL4-A -ldev_id 00:46  
raidcom add lun -port CL4-A -ldev_id 00:47
```

```
raidcom add lun -port CL6-A -ldev_id 00:30  
raidcom add lun -port CL6-A -ldev_id 00:31  
raidcom add lun -port CL6-A -ldev_id 00:32  
raidcom add lun -port CL6-A -ldev_id 00:33  
raidcom add lun -port CL6-A -ldev_id 00:34
```

```
raidcom add lun -port CL6-A -ldev_id 00:35
raidcom add lun -port CL6-A -ldev_id 00:36
raidcom add lun -port CL6-A -ldev_id 00:37
raidcom add lun -port CL6-A -ldev_id 00:38
raidcom add lun -port CL6-A -ldev_id 00:39
raidcom add lun -port CL6-A -ldev_id 00:3A
raidcom add lun -port CL6-A -ldev_id 00:3B
raidcom add lun -port CL6-A -ldev_id 00:3C
raidcom add lun -port CL6-A -ldev_id 00:3D
raidcom add lun -port CL6-A -ldev_id 00:3E
raidcom add lun -port CL6-A -ldev_id 00:3F
raidcom add lun -port CL6-A -ldev_id 00:40
raidcom add lun -port CL6-A -ldev_id 00:41
raidcom add lun -port CL6-A -ldev_id 00:42
raidcom add lun -port CL6-A -ldev_id 00:43
raidcom add lun -port CL6-A -ldev_id 00:44
raidcom add lun -port CL6-A -ldev_id 00:45
raidcom add lun -port CL6-A -ldev_id 00:46
raidcom add lun -port CL6-A -ldev_id 00:47
```

```
raidcom add lun -port CL2-C -ldev_id 00:30
raidcom add lun -port CL2-C -ldev_id 00:31
raidcom add lun -port CL2-C -ldev_id 00:32
raidcom add lun -port CL2-C -ldev_id 00:33
raidcom add lun -port CL2-C -ldev_id 00:34
raidcom add lun -port CL2-C -ldev_id 00:35
raidcom add lun -port CL2-C -ldev_id 00:36
raidcom add lun -port CL2-C -ldev_id 00:37
raidcom add lun -port CL2-C -ldev_id 00:38
raidcom add lun -port CL2-C -ldev_id 00:39
raidcom add lun -port CL2-C -ldev_id 00:3A
raidcom add lun -port CL2-C -ldev_id 00:3B
raidcom add lun -port CL2-C -ldev_id 00:3C
raidcom add lun -port CL2-C -ldev_id 00:3D
raidcom add lun -port CL2-C -ldev_id 00:3E
raidcom add lun -port CL2-C -ldev_id 00:3F
raidcom add lun -port CL2-C -ldev_id 00:40
raidcom add lun -port CL2-C -ldev_id 00:41
raidcom add lun -port CL2-C -ldev_id 00:42
raidcom add lun -port CL2-C -ldev_id 00:43
raidcom add lun -port CL2-C -ldev_id 00:44
raidcom add lun -port CL2-C -ldev_id 00:45
raidcom add lun -port CL2-C -ldev_id 00:46
raidcom add lun -port CL2-C -ldev_id 00:47
```

```
raidcom add lun -port CL4-C -ldev_id 00:30
raidcom add lun -port CL4-C -ldev_id 00:31
raidcom add lun -port CL4-C -ldev_id 00:32
raidcom add lun -port CL4-C -ldev_id 00:33
raidcom add lun -port CL4-C -ldev_id 00:34
raidcom add lun -port CL4-C -ldev_id 00:35
raidcom add lun -port CL4-C -ldev_id 00:36
raidcom add lun -port CL4-C -ldev_id 00:37
raidcom add lun -port CL4-C -ldev_id 00:38
raidcom add lun -port CL4-C -ldev_id 00:39
raidcom add lun -port CL4-C -ldev_id 00:3A
raidcom add lun -port CL4-C -ldev_id 00:3B
raidcom add lun -port CL4-C -ldev_id 00:3C
raidcom add lun -port CL4-C -ldev_id 00:3D
raidcom add lun -port CL4-C -ldev_id 00:3E
raidcom add lun -port CL4-C -ldev_id 00:3F
raidcom add lun -port CL4-C -ldev_id 00:40
```



```
raidcom add lun -port CL4-C -ldev_id 00:41
raidcom add lun -port CL4-C -ldev_id 00:42
raidcom add lun -port CL4-C -ldev_id 00:43
raidcom add lun -port CL4-C -ldev_id 00:44
raidcom add lun -port CL4-C -ldev_id 00:45
raidcom add lun -port CL4-C -ldev_id 00:46
raidcom add lun -port CL4-C -ldev_id 00:47
```

```
raidcom add lun -port CL6-C -ldev_id 00:30
raidcom add lun -port CL6-C -ldev_id 00:31
raidcom add lun -port CL6-C -ldev_id 00:32
raidcom add lun -port CL6-C -ldev_id 00:33
raidcom add lun -port CL6-C -ldev_id 00:34
raidcom add lun -port CL6-C -ldev_id 00:35
raidcom add lun -port CL6-C -ldev_id 00:36
raidcom add lun -port CL6-C -ldev_id 00:37
raidcom add lun -port CL6-C -ldev_id 00:38
raidcom add lun -port CL6-C -ldev_id 00:39
raidcom add lun -port CL6-C -ldev_id 00:3A
raidcom add lun -port CL6-C -ldev_id 00:3B
raidcom add lun -port CL6-C -ldev_id 00:3C
raidcom add lun -port CL6-C -ldev_id 00:3D
raidcom add lun -port CL6-C -ldev_id 00:3E
raidcom add lun -port CL6-C -ldev_id 00:3F
raidcom add lun -port CL6-C -ldev_id 00:40
raidcom add lun -port CL6-C -ldev_id 00:41
raidcom add lun -port CL6-C -ldev_id 00:42
raidcom add lun -port CL6-C -ldev_id 00:43
raidcom add lun -port CL6-C -ldev_id 00:44
raidcom add lun -port CL6-C -ldev_id 00:45
raidcom add lun -port CL6-C -ldev_id 00:46
raidcom add lun -port CL6-C -ldev_id 00:47
```

#-----

```
raidcom add lun -port CL2-B -ldev_id 00:48
raidcom add lun -port CL2-B -ldev_id 00:49
raidcom add lun -port CL2-B -ldev_id 00:4A
raidcom add lun -port CL2-B -ldev_id 00:4B
raidcom add lun -port CL2-B -ldev_id 00:4C
raidcom add lun -port CL2-B -ldev_id 00:4D
raidcom add lun -port CL2-B -ldev_id 00:4E
raidcom add lun -port CL2-B -ldev_id 00:4F
raidcom add lun -port CL2-B -ldev_id 00:50
raidcom add lun -port CL2-B -ldev_id 00:51
raidcom add lun -port CL2-B -ldev_id 00:52
raidcom add lun -port CL2-B -ldev_id 00:53
raidcom add lun -port CL2-B -ldev_id 00:54
raidcom add lun -port CL2-B -ldev_id 00:55
raidcom add lun -port CL2-B -ldev_id 00:56
raidcom add lun -port CL2-B -ldev_id 00:57
raidcom add lun -port CL2-B -ldev_id 00:58
raidcom add lun -port CL2-B -ldev_id 00:59
raidcom add lun -port CL2-B -ldev_id 00:5A
raidcom add lun -port CL2-B -ldev_id 00:5B
raidcom add lun -port CL2-B -ldev_id 00:5C
raidcom add lun -port CL2-B -ldev_id 00:5D
raidcom add lun -port CL2-B -ldev_id 00:5E
raidcom add lun -port CL2-B -ldev_id 00:5F
```

```
raidcom add lun -port CL4-B -ldev_id 00:48
raidcom add lun -port CL4-B -ldev_id 00:49
```

```
raidcom add lun -port CL4-B -ldev_id 00:4A
raidcom add lun -port CL4-B -ldev_id 00:4B
raidcom add lun -port CL4-B -ldev_id 00:4C
raidcom add lun -port CL4-B -ldev_id 00:4D
raidcom add lun -port CL4-B -ldev_id 00:4E
raidcom add lun -port CL4-B -ldev_id 00:4F
raidcom add lun -port CL4-B -ldev_id 00:50
raidcom add lun -port CL4-B -ldev_id 00:51
raidcom add lun -port CL4-B -ldev_id 00:52
raidcom add lun -port CL4-B -ldev_id 00:53
raidcom add lun -port CL4-B -ldev_id 00:54
raidcom add lun -port CL4-B -ldev_id 00:55
raidcom add lun -port CL4-B -ldev_id 00:56
raidcom add lun -port CL4-B -ldev_id 00:57
raidcom add lun -port CL4-B -ldev_id 00:58
raidcom add lun -port CL4-B -ldev_id 00:59
raidcom add lun -port CL4-B -ldev_id 00:5A
raidcom add lun -port CL4-B -ldev_id 00:5B
raidcom add lun -port CL4-B -ldev_id 00:5C
raidcom add lun -port CL4-B -ldev_id 00:5D
raidcom add lun -port CL4-B -ldev_id 00:5E
raidcom add lun -port CL4-B -ldev_id 00:5F
```

```
raidcom add lun -port CL6-B -ldev_id 00:48
raidcom add lun -port CL6-B -ldev_id 00:49
raidcom add lun -port CL6-B -ldev_id 00:4A
raidcom add lun -port CL6-B -ldev_id 00:4B
raidcom add lun -port CL6-B -ldev_id 00:4C
raidcom add lun -port CL6-B -ldev_id 00:4D
raidcom add lun -port CL6-B -ldev_id 00:4E
raidcom add lun -port CL6-B -ldev_id 00:4F
raidcom add lun -port CL6-B -ldev_id 00:50
raidcom add lun -port CL6-B -ldev_id 00:51
raidcom add lun -port CL6-B -ldev_id 00:52
raidcom add lun -port CL6-B -ldev_id 00:53
raidcom add lun -port CL6-B -ldev_id 00:54
raidcom add lun -port CL6-B -ldev_id 00:55
raidcom add lun -port CL6-B -ldev_id 00:56
raidcom add lun -port CL6-B -ldev_id 00:57
raidcom add lun -port CL6-B -ldev_id 00:58
raidcom add lun -port CL6-B -ldev_id 00:59
raidcom add lun -port CL6-B -ldev_id 00:5A
raidcom add lun -port CL6-B -ldev_id 00:5B
raidcom add lun -port CL6-B -ldev_id 00:5C
raidcom add lun -port CL6-B -ldev_id 00:5D
raidcom add lun -port CL6-B -ldev_id 00:5E
raidcom add lun -port CL6-B -ldev_id 00:5F
```

```
raidcom add lun -port CL2-D -ldev_id 00:48
raidcom add lun -port CL2-D -ldev_id 00:49
raidcom add lun -port CL2-D -ldev_id 00:4A
raidcom add lun -port CL2-D -ldev_id 00:4B
raidcom add lun -port CL2-D -ldev_id 00:4C
raidcom add lun -port CL2-D -ldev_id 00:4D
raidcom add lun -port CL2-D -ldev_id 00:4E
raidcom add lun -port CL2-D -ldev_id 00:4F
raidcom add lun -port CL2-D -ldev_id 00:50
raidcom add lun -port CL2-D -ldev_id 00:51
raidcom add lun -port CL2-D -ldev_id 00:52
raidcom add lun -port CL2-D -ldev_id 00:53
raidcom add lun -port CL2-D -ldev_id 00:54
raidcom add lun -port CL2-D -ldev_id 00:55
raidcom add lun -port CL2-D -ldev_id 00:56
```

```
raidcom add lun -port CL2-D -ldev_id 00:57
raidcom add lun -port CL2-D -ldev_id 00:58
raidcom add lun -port CL2-D -ldev_id 00:59
raidcom add lun -port CL2-D -ldev_id 00:5A
raidcom add lun -port CL2-D -ldev_id 00:5B
raidcom add lun -port CL2-D -ldev_id 00:5C
raidcom add lun -port CL2-D -ldev_id 00:5D
raidcom add lun -port CL2-D -ldev_id 00:5E
raidcom add lun -port CL2-D -ldev_id 00:5F
```

```
raidcom add lun -port CL4-D -ldev_id 00:48
raidcom add lun -port CL4-D -ldev_id 00:49
raidcom add lun -port CL4-D -ldev_id 00:4A
raidcom add lun -port CL4-D -ldev_id 00:4B
raidcom add lun -port CL4-D -ldev_id 00:4C
raidcom add lun -port CL4-D -ldev_id 00:4D
raidcom add lun -port CL4-D -ldev_id 00:4E
raidcom add lun -port CL4-D -ldev_id 00:4F
raidcom add lun -port CL4-D -ldev_id 00:50
raidcom add lun -port CL4-D -ldev_id 00:51
raidcom add lun -port CL4-D -ldev_id 00:52
raidcom add lun -port CL4-D -ldev_id 00:53
raidcom add lun -port CL4-D -ldev_id 00:54
raidcom add lun -port CL4-D -ldev_id 00:55
raidcom add lun -port CL4-D -ldev_id 00:56
raidcom add lun -port CL4-D -ldev_id 00:57
raidcom add lun -port CL4-D -ldev_id 00:58
raidcom add lun -port CL4-D -ldev_id 00:59
raidcom add lun -port CL4-D -ldev_id 00:5A
raidcom add lun -port CL4-D -ldev_id 00:5B
raidcom add lun -port CL4-D -ldev_id 00:5C
raidcom add lun -port CL4-D -ldev_id 00:5D
raidcom add lun -port CL4-D -ldev_id 00:5E
raidcom add lun -port CL4-D -ldev_id 00:5F
```

```
raidcom add lun -port CL6-D -ldev_id 00:48
raidcom add lun -port CL6-D -ldev_id 00:49
raidcom add lun -port CL6-D -ldev_id 00:4A
raidcom add lun -port CL6-D -ldev_id 00:4B
raidcom add lun -port CL6-D -ldev_id 00:4C
raidcom add lun -port CL6-D -ldev_id 00:4D
raidcom add lun -port CL6-D -ldev_id 00:4E
raidcom add lun -port CL6-D -ldev_id 00:4F
raidcom add lun -port CL6-D -ldev_id 00:50
raidcom add lun -port CL6-D -ldev_id 00:51
raidcom add lun -port CL6-D -ldev_id 00:52
raidcom add lun -port CL6-D -ldev_id 00:53
raidcom add lun -port CL6-D -ldev_id 00:54
raidcom add lun -port CL6-D -ldev_id 00:55
raidcom add lun -port CL6-D -ldev_id 00:56
raidcom add lun -port CL6-D -ldev_id 00:57
raidcom add lun -port CL6-D -ldev_id 00:58
raidcom add lun -port CL6-D -ldev_id 00:59
raidcom add lun -port CL6-D -ldev_id 00:5A
raidcom add lun -port CL6-D -ldev_id 00:5B
raidcom add lun -port CL6-D -ldev_id 00:5C
raidcom add lun -port CL6-D -ldev_id 00:5D
raidcom add lun -port CL6-D -ldev_id 00:5E
raidcom add lun -port CL6-D -ldev_id 00:5F
```

APPENDIX D: SPC-2 WORKLOAD GENERATOR STORAGE COMMANDS AND PARAMETER FILES

ASU Pre-Fill

```
compratio=1
```

```
# Host Definition
```

```
hd=default,vdbench=C:\vdbench503rc11,shell=vdbench,user=administrator
hd=CB34,system=172.17.17.34
hd=CB36,system=172.17.17.36
hd=CB38,system=172.17.17.38
hd=CB39,system=172.17.17.39
hd=CB40,system=172.17.17.40
hd=CB41,system=172.17.17.41
```

```
# Storage Definition
```

```
#sequential vdbench run is valid only if one LUN is given load from one server,
#though all storage luns are mapped to all the six servers but with the below sd
definition only one server gives load to a lun.
```

```
sd=sd1,host=CB34,lun=\\.\Physicaldrive0
sd=sd2,host=CB34,lun=\\.\Physicaldrive1
sd=sd3,host=CB34,lun=\\.\Physicaldrive2
sd=sd4,host=CB34,lun=\\.\Physicaldrive3
sd=sd5,host=CB36,lun=\\.\Physicaldrive4
sd=sd6,host=CB36,lun=\\.\Physicaldrive5
sd=sd7,host=CB36,lun=\\.\Physicaldrive6
sd=sd8,host=CB36,lun=\\.\Physicaldrive7
sd=sd9,host=CB38,lun=\\.\Physicaldrive8
sd=sd10,host=CB38,lun=\\.\Physicaldrive9
sd=sd11,host=CB38,lun=\\.\Physicaldrive10
sd=sd12,host=CB38,lun=\\.\Physicaldrive11
sd=sd13,host=CB39,lun=\\.\Physicaldrive12
sd=sd14,host=CB39,lun=\\.\Physicaldrive13
sd=sd15,host=CB39,lun=\\.\Physicaldrive14
sd=sd16,host=CB39,lun=\\.\Physicaldrive15
sd=sd17,host=CB40,lun=\\.\Physicaldrive16
sd=sd18,host=CB40,lun=\\.\Physicaldrive17
sd=sd19,host=CB40,lun=\\.\Physicaldrive18
sd=sd20,host=CB40,lun=\\.\Physicaldrive19
sd=sd21,host=CB41,lun=\\.\Physicaldrive20
sd=sd22,host=CB41,lun=\\.\Physicaldrive21
sd=sd23,host=CB41,lun=\\.\Physicaldrive22
sd=sd24,host=CB41,lun=\\.\Physicaldrive23

sd=sd25,host=CB34,lun=\\.\Physicaldrive24
sd=sd26,host=CB34,lun=\\.\Physicaldrive25
sd=sd27,host=CB34,lun=\\.\Physicaldrive26
sd=sd28,host=CB34,lun=\\.\Physicaldrive27
sd=sd29,host=CB36,lun=\\.\Physicaldrive28
sd=sd30,host=CB36,lun=\\.\Physicaldrive29
sd=sd31,host=CB36,lun=\\.\Physicaldrive30
sd=sd32,host=CB36,lun=\\.\Physicaldrive31
sd=sd33,host=CB38,lun=\\.\Physicaldrive32
sd=sd34,host=CB38,lun=\\.\Physicaldrive33
sd=sd35,host=CB38,lun=\\.\Physicaldrive34
```

sd=sd36,host=CB38,lun=\\.\Physicaldrive35
sd=sd37,host=CB39,lun=\\.\Physicaldrive36
sd=sd38,host=CB39,lun=\\.\Physicaldrive37
sd=sd39,host=CB39,lun=\\.\Physicaldrive38
sd=sd40,host=CB39,lun=\\.\Physicaldrive39
sd=sd41,host=CB40,lun=\\.\Physicaldrive40
sd=sd42,host=CB40,lun=\\.\Physicaldrive41
sd=sd43,host=CB40,lun=\\.\Physicaldrive42
sd=sd44,host=CB40,lun=\\.\Physicaldrive43
sd=sd45,host=CB41,lun=\\.\Physicaldrive44
sd=sd46,host=CB41,lun=\\.\Physicaldrive45
sd=sd47,host=CB41,lun=\\.\Physicaldrive46
sd=sd48,host=CB41,lun=\\.\Physicaldrive47

sd=sd49,host=CB34,lun=\\.\Physicaldrive48
sd=sd50,host=CB34,lun=\\.\Physicaldrive49
sd=sd51,host=CB34,lun=\\.\Physicaldrive50
sd=sd52,host=CB34,lun=\\.\Physicaldrive51
sd=sd53,host=CB36,lun=\\.\Physicaldrive52
sd=sd54,host=CB36,lun=\\.\Physicaldrive53
sd=sd55,host=CB36,lun=\\.\Physicaldrive54
sd=sd56,host=CB36,lun=\\.\Physicaldrive55
sd=sd57,host=CB38,lun=\\.\Physicaldrive56
sd=sd58,host=CB38,lun=\\.\Physicaldrive57
sd=sd59,host=CB38,lun=\\.\Physicaldrive58
sd=sd60,host=CB38,lun=\\.\Physicaldrive59
sd=sd61,host=CB39,lun=\\.\Physicaldrive60
sd=sd62,host=CB39,lun=\\.\Physicaldrive61
sd=sd63,host=CB39,lun=\\.\Physicaldrive62
sd=sd64,host=CB39,lun=\\.\Physicaldrive63
sd=sd65,host=CB40,lun=\\.\Physicaldrive64
sd=sd66,host=CB40,lun=\\.\Physicaldrive65
sd=sd67,host=CB40,lun=\\.\Physicaldrive66
sd=sd68,host=CB40,lun=\\.\Physicaldrive67
sd=sd69,host=CB41,lun=\\.\Physicaldrive68
sd=sd70,host=CB41,lun=\\.\Physicaldrive69
sd=sd71,host=CB41,lun=\\.\Physicaldrive70
sd=sd72,host=CB41,lun=\\.\Physicaldrive71

sd=sd73,host=CB34,lun=\\.\Physicaldrive72
sd=sd74,host=CB34,lun=\\.\Physicaldrive73
sd=sd75,host=CB34,lun=\\.\Physicaldrive74
sd=sd76,host=CB34,lun=\\.\Physicaldrive75
sd=sd77,host=CB36,lun=\\.\Physicaldrive76
sd=sd78,host=CB36,lun=\\.\Physicaldrive77
sd=sd79,host=CB36,lun=\\.\Physicaldrive78
sd=sd80,host=CB36,lun=\\.\Physicaldrive79
sd=sd81,host=CB38,lun=\\.\Physicaldrive80
sd=sd82,host=CB38,lun=\\.\Physicaldrive81
sd=sd83,host=CB38,lun=\\.\Physicaldrive82
sd=sd84,host=CB38,lun=\\.\Physicaldrive83
sd=sd85,host=CB39,lun=\\.\Physicaldrive84
sd=sd86,host=CB39,lun=\\.\Physicaldrive85
sd=sd87,host=CB39,lun=\\.\Physicaldrive86
sd=sd88,host=CB39,lun=\\.\Physicaldrive87
sd=sd89,host=CB40,lun=\\.\Physicaldrive88
sd=sd90,host=CB40,lun=\\.\Physicaldrive89
sd=sd91,host=CB40,lun=\\.\Physicaldrive90
sd=sd92,host=CB40,lun=\\.\Physicaldrive91
sd=sd93,host=CB41,lun=\\.\Physicaldrive92
sd=sd94,host=CB41,lun=\\.\Physicaldrive93
sd=sd95,host=CB41,lun=\\.\Physicaldrive94

```
sd=sd96,host=CB41,lun=\\.Physicaldrive95

wd=wd_raw0,host=CB34,sd=(sd1-sd4,sd25-sd28,sd49-sd52,sd73-sd76),seekpct=eof
wd=wd_raw1,host=CB36,sd=(sd5-sd8,sd29-sd32,sd53-sd56,sd77-sd80),seekpct=eof
wd=wd_raw2,host=CB38,sd=(sd9-sd12,sd33-sd36,sd57-sd60,sd81-sd84),seekpct=eof
wd=wd_raw3,host=CB39,sd=(sd13-sd16,sd37-sd40,sd61-sd64,sd85-sd88),seekpct=eof
wd=wd_raw4,host=CB40,sd=(sd17-sd20,sd41-sd44,sd65-sd68,sd89-sd92),seekpct=eof
wd=wd_raw5,host=CB41,sd=(sd21-sd24,sd45-sd48,sd69-sd72,sd93-sd96),seekpct=eof

rd=rd_rdl,wd=wd_raw*,elapsed=100h,interval=5,forxfersize=1m,forrdpct=(0),forthreads=
(1),iorate=max
```

Common Commands/Parameters – LFP, LDQ and VOD

The following command/parameter lines appear in each of the command and parameter files for the Large File Processing (LFP), Large Database Query (LDQ) and Video on Demand (VOD). The command lines are only listed below to eliminate redundancy.

```
host=localhost,
java=(c:\java64\bin\java),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500,
```

```
host=(172.17.17.39,CB39),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500
```

```
host=(172.17.17.40,CB40),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500
```

```
host=(172.17.17.41,CB41),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500
```

```
host=(172.17.17.34,CB34),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500
```

```
host=(172.17.17.36,CB36),
spc2="c:\spc\spc2",
shell=spc2,
jvms=1,
maxstreams=500
```

Common Commands/Parameters – LFP, LDQ, VOD and Persistence

The following command/parameter lines appear in each of the command and parameter files for the Large File Processing (LFP), Large Database Query (LDQ), Video on Demand (VOD) and SPC-2 Persistence Tests. The command lines are only listed below to eliminate redundancy.

```
sd=default,host=localhost,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
sd=sd36,lun=\\.\PhysicalDrive35
sd=sd37,lun=\\.\PhysicalDrive36
sd=sd38,lun=\\.\PhysicalDrive37
sd=sd39,lun=\\.\PhysicalDrive38
sd=sd40,lun=\\.\PhysicalDrive39
sd=sd41,lun=\\.\PhysicalDrive40
sd=sd42,lun=\\.\PhysicalDrive41
sd=sd43,lun=\\.\PhysicalDrive42
sd=sd44,lun=\\.\PhysicalDrive43
sd=sd45,lun=\\.\PhysicalDrive44
sd=sd46,lun=\\.\PhysicalDrive45
sd=sd47,lun=\\.\PhysicalDrive46
sd=sd48,lun=\\.\PhysicalDrive47
sd=sd49,lun=\\.\PhysicalDrive48
sd=sd50,lun=\\.\PhysicalDrive49
sd=sd51,lun=\\.\PhysicalDrive50
sd=sd52,lun=\\.\PhysicalDrive51
sd=sd53,lun=\\.\PhysicalDrive52
```

```
sd=sd54,lun=\\.\PhysicalDrive53
sd=sd55,lun=\\.\PhysicalDrive54
sd=sd56,lun=\\.\PhysicalDrive55
sd=sd57,lun=\\.\PhysicalDrive56
sd=sd58,lun=\\.\PhysicalDrive57
sd=sd59,lun=\\.\PhysicalDrive58
sd=sd60,lun=\\.\PhysicalDrive59
sd=sd61,lun=\\.\PhysicalDrive60
sd=sd62,lun=\\.\PhysicalDrive61
sd=sd63,lun=\\.\PhysicalDrive62
sd=sd64,lun=\\.\PhysicalDrive63
sd=sd65,lun=\\.\PhysicalDrive64
sd=sd66,lun=\\.\PhysicalDrive65
sd=sd67,lun=\\.\PhysicalDrive66
sd=sd68,lun=\\.\PhysicalDrive67
sd=sd69,lun=\\.\PhysicalDrive68
sd=sd70,lun=\\.\PhysicalDrive69
sd=sd71,lun=\\.\PhysicalDrive70
sd=sd72,lun=\\.\PhysicalDrive71
sd=sd73,lun=\\.\PhysicalDrive72
sd=sd74,lun=\\.\PhysicalDrive73
sd=sd75,lun=\\.\PhysicalDrive74
sd=sd76,lun=\\.\PhysicalDrive75
sd=sd77,lun=\\.\PhysicalDrive76
sd=sd78,lun=\\.\PhysicalDrive77
sd=sd79,lun=\\.\PhysicalDrive78
sd=sd80,lun=\\.\PhysicalDrive79
sd=sd81,lun=\\.\PhysicalDrive80
sd=sd82,lun=\\.\PhysicalDrive81
sd=sd83,lun=\\.\PhysicalDrive82
sd=sd84,lun=\\.\PhysicalDrive83
sd=sd85,lun=\\.\PhysicalDrive84
sd=sd86,lun=\\.\PhysicalDrive85
sd=sd87,lun=\\.\PhysicalDrive86
sd=sd88,lun=\\.\PhysicalDrive87
sd=sd89,lun=\\.\PhysicalDrive88
sd=sd90,lun=\\.\PhysicalDrive89
sd=sd91,lun=\\.\PhysicalDrive90
sd=sd92,lun=\\.\PhysicalDrive91
sd=sd93,lun=\\.\PhysicalDrive92
sd=sd94,lun=\\.\PhysicalDrive93
sd=sd95,lun=\\.\PhysicalDrive94
sd=sd96,lun=\\.\PhysicalDrive95
```

```
sd=default,host=CB39,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
```


sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
sd=sd36,lun=\\.\PhysicalDrive35
sd=sd37,lun=\\.\PhysicalDrive36
sd=sd38,lun=\\.\PhysicalDrive37
sd=sd39,lun=\\.\PhysicalDrive38
sd=sd40,lun=\\.\PhysicalDrive39
sd=sd41,lun=\\.\PhysicalDrive40
sd=sd42,lun=\\.\PhysicalDrive41
sd=sd43,lun=\\.\PhysicalDrive42
sd=sd44,lun=\\.\PhysicalDrive43
sd=sd45,lun=\\.\PhysicalDrive44
sd=sd46,lun=\\.\PhysicalDrive45
sd=sd47,lun=\\.\PhysicalDrive46
sd=sd48,lun=\\.\PhysicalDrive47
sd=sd49,lun=\\.\PhysicalDrive48
sd=sd50,lun=\\.\PhysicalDrive49
sd=sd51,lun=\\.\PhysicalDrive50
sd=sd52,lun=\\.\PhysicalDrive51
sd=sd53,lun=\\.\PhysicalDrive52
sd=sd54,lun=\\.\PhysicalDrive53
sd=sd55,lun=\\.\PhysicalDrive54
sd=sd56,lun=\\.\PhysicalDrive55
sd=sd57,lun=\\.\PhysicalDrive56
sd=sd58,lun=\\.\PhysicalDrive57
sd=sd59,lun=\\.\PhysicalDrive58
sd=sd60,lun=\\.\PhysicalDrive59
sd=sd61,lun=\\.\PhysicalDrive60
sd=sd62,lun=\\.\PhysicalDrive61
sd=sd63,lun=\\.\PhysicalDrive62
sd=sd64,lun=\\.\PhysicalDrive63
sd=sd65,lun=\\.\PhysicalDrive64
sd=sd66,lun=\\.\PhysicalDrive65
sd=sd67,lun=\\.\PhysicalDrive66
sd=sd68,lun=\\.\PhysicalDrive67
sd=sd69,lun=\\.\PhysicalDrive68
sd=sd70,lun=\\.\PhysicalDrive69
sd=sd71,lun=\\.\PhysicalDrive70
sd=sd72,lun=\\.\PhysicalDrive71
sd=sd73,lun=\\.\PhysicalDrive72
sd=sd74,lun=\\.\PhysicalDrive73
sd=sd75,lun=\\.\PhysicalDrive74
sd=sd76,lun=\\.\PhysicalDrive75
sd=sd77,lun=\\.\PhysicalDrive76
sd=sd78,lun=\\.\PhysicalDrive77
sd=sd79,lun=\\.\PhysicalDrive78
sd=sd80,lun=\\.\PhysicalDrive79

```
sd=sd81,lun=\\.\PhysicalDrive80
sd=sd82,lun=\\.\PhysicalDrive81
sd=sd83,lun=\\.\PhysicalDrive82
sd=sd84,lun=\\.\PhysicalDrive83
sd=sd85,lun=\\.\PhysicalDrive84
sd=sd86,lun=\\.\PhysicalDrive85
sd=sd87,lun=\\.\PhysicalDrive86
sd=sd88,lun=\\.\PhysicalDrive87
sd=sd89,lun=\\.\PhysicalDrive88
sd=sd90,lun=\\.\PhysicalDrive89
sd=sd91,lun=\\.\PhysicalDrive90
sd=sd92,lun=\\.\PhysicalDrive91
sd=sd93,lun=\\.\PhysicalDrive92
sd=sd94,lun=\\.\PhysicalDrive93
sd=sd95,lun=\\.\PhysicalDrive94
sd=sd96,lun=\\.\PhysicalDrive95
```

```
sd=default,host=CB40,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
sd=sd36,lun=\\.\PhysicalDrive35
sd=sd37,lun=\\.\PhysicalDrive36
sd=sd38,lun=\\.\PhysicalDrive37
sd=sd39,lun=\\.\PhysicalDrive38
sd=sd40,lun=\\.\PhysicalDrive39
sd=sd41,lun=\\.\PhysicalDrive40
sd=sd42,lun=\\.\PhysicalDrive41
sd=sd43,lun=\\.\PhysicalDrive42
sd=sd44,lun=\\.\PhysicalDrive43
```

```
sd=sd45,lun=\\.\PhysicalDrive44
sd=sd46,lun=\\.\PhysicalDrive45
sd=sd47,lun=\\.\PhysicalDrive46
sd=sd48,lun=\\.\PhysicalDrive47
sd=sd49,lun=\\.\PhysicalDrive48
sd=sd50,lun=\\.\PhysicalDrive49
sd=sd51,lun=\\.\PhysicalDrive50
sd=sd52,lun=\\.\PhysicalDrive51
sd=sd53,lun=\\.\PhysicalDrive52
sd=sd54,lun=\\.\PhysicalDrive53
sd=sd55,lun=\\.\PhysicalDrive54
sd=sd56,lun=\\.\PhysicalDrive55
sd=sd57,lun=\\.\PhysicalDrive56
sd=sd58,lun=\\.\PhysicalDrive57
sd=sd59,lun=\\.\PhysicalDrive58
sd=sd60,lun=\\.\PhysicalDrive59
sd=sd61,lun=\\.\PhysicalDrive60
sd=sd62,lun=\\.\PhysicalDrive61
sd=sd63,lun=\\.\PhysicalDrive62
sd=sd64,lun=\\.\PhysicalDrive63
sd=sd65,lun=\\.\PhysicalDrive64
sd=sd66,lun=\\.\PhysicalDrive65
sd=sd67,lun=\\.\PhysicalDrive66
sd=sd68,lun=\\.\PhysicalDrive67
sd=sd69,lun=\\.\PhysicalDrive68
sd=sd70,lun=\\.\PhysicalDrive69
sd=sd71,lun=\\.\PhysicalDrive70
sd=sd72,lun=\\.\PhysicalDrive71
sd=sd73,lun=\\.\PhysicalDrive72
sd=sd74,lun=\\.\PhysicalDrive73
sd=sd75,lun=\\.\PhysicalDrive74
sd=sd76,lun=\\.\PhysicalDrive75
sd=sd77,lun=\\.\PhysicalDrive76
sd=sd78,lun=\\.\PhysicalDrive77
sd=sd79,lun=\\.\PhysicalDrive78
sd=sd80,lun=\\.\PhysicalDrive79
sd=sd81,lun=\\.\PhysicalDrive80
sd=sd82,lun=\\.\PhysicalDrive81
sd=sd83,lun=\\.\PhysicalDrive82
sd=sd84,lun=\\.\PhysicalDrive83
sd=sd85,lun=\\.\PhysicalDrive84
sd=sd86,lun=\\.\PhysicalDrive85
sd=sd87,lun=\\.\PhysicalDrive86
sd=sd88,lun=\\.\PhysicalDrive87
sd=sd89,lun=\\.\PhysicalDrive88
sd=sd90,lun=\\.\PhysicalDrive89
sd=sd91,lun=\\.\PhysicalDrive90
sd=sd92,lun=\\.\PhysicalDrive91
sd=sd93,lun=\\.\PhysicalDrive92
sd=sd94,lun=\\.\PhysicalDrive93
sd=sd95,lun=\\.\PhysicalDrive94
sd=sd96,lun=\\.\PhysicalDrive95
```

```
sd=default,host=CB41,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
```

```
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
sd=sd36,lun=\\.\PhysicalDrive35
sd=sd37,lun=\\.\PhysicalDrive36
sd=sd38,lun=\\.\PhysicalDrive37
sd=sd39,lun=\\.\PhysicalDrive38
sd=sd40,lun=\\.\PhysicalDrive39
sd=sd41,lun=\\.\PhysicalDrive40
sd=sd42,lun=\\.\PhysicalDrive41
sd=sd43,lun=\\.\PhysicalDrive42
sd=sd44,lun=\\.\PhysicalDrive43
sd=sd45,lun=\\.\PhysicalDrive44
sd=sd46,lun=\\.\PhysicalDrive45
sd=sd47,lun=\\.\PhysicalDrive46
sd=sd48,lun=\\.\PhysicalDrive47
sd=sd49,lun=\\.\PhysicalDrive48
sd=sd50,lun=\\.\PhysicalDrive49
sd=sd51,lun=\\.\PhysicalDrive50
sd=sd52,lun=\\.\PhysicalDrive51
sd=sd53,lun=\\.\PhysicalDrive52
sd=sd54,lun=\\.\PhysicalDrive53
sd=sd55,lun=\\.\PhysicalDrive54
sd=sd56,lun=\\.\PhysicalDrive55
sd=sd57,lun=\\.\PhysicalDrive56
sd=sd58,lun=\\.\PhysicalDrive57
sd=sd59,lun=\\.\PhysicalDrive58
sd=sd60,lun=\\.\PhysicalDrive59
sd=sd61,lun=\\.\PhysicalDrive60
sd=sd62,lun=\\.\PhysicalDrive61
sd=sd63,lun=\\.\PhysicalDrive62
sd=sd64,lun=\\.\PhysicalDrive63
sd=sd65,lun=\\.\PhysicalDrive64
sd=sd66,lun=\\.\PhysicalDrive65
sd=sd67,lun=\\.\PhysicalDrive66
sd=sd68,lun=\\.\PhysicalDrive67
sd=sd69,lun=\\.\PhysicalDrive68
sd=sd70,lun=\\.\PhysicalDrive69
sd=sd71,lun=\\.\PhysicalDrive70
```

```
sd=sd72,lun=\\.\PhysicalDrive71
sd=sd73,lun=\\.\PhysicalDrive72
sd=sd74,lun=\\.\PhysicalDrive73
sd=sd75,lun=\\.\PhysicalDrive74
sd=sd76,lun=\\.\PhysicalDrive75
sd=sd77,lun=\\.\PhysicalDrive76
sd=sd78,lun=\\.\PhysicalDrive77
sd=sd79,lun=\\.\PhysicalDrive78
sd=sd80,lun=\\.\PhysicalDrive79
sd=sd81,lun=\\.\PhysicalDrive80
sd=sd82,lun=\\.\PhysicalDrive81
sd=sd83,lun=\\.\PhysicalDrive82
sd=sd84,lun=\\.\PhysicalDrive83
sd=sd85,lun=\\.\PhysicalDrive84
sd=sd86,lun=\\.\PhysicalDrive85
sd=sd87,lun=\\.\PhysicalDrive86
sd=sd88,lun=\\.\PhysicalDrive87
sd=sd89,lun=\\.\PhysicalDrive88
sd=sd90,lun=\\.\PhysicalDrive89
sd=sd91,lun=\\.\PhysicalDrive90
sd=sd92,lun=\\.\PhysicalDrive91
sd=sd93,lun=\\.\PhysicalDrive92
sd=sd94,lun=\\.\PhysicalDrive93
sd=sd95,lun=\\.\PhysicalDrive94
sd=sd96,lun=\\.\PhysicalDrive95
```

```
sd=default,host=CB34,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
```

```
sd=sd36,lun=\\.PhysicalDrive35
sd=sd37,lun=\\.PhysicalDrive36
sd=sd38,lun=\\.PhysicalDrive37
sd=sd39,lun=\\.PhysicalDrive38
sd=sd40,lun=\\.PhysicalDrive39
sd=sd41,lun=\\.PhysicalDrive40
sd=sd42,lun=\\.PhysicalDrive41
sd=sd43,lun=\\.PhysicalDrive42
sd=sd44,lun=\\.PhysicalDrive43
sd=sd45,lun=\\.PhysicalDrive44
sd=sd46,lun=\\.PhysicalDrive45
sd=sd47,lun=\\.PhysicalDrive46
sd=sd48,lun=\\.PhysicalDrive47
sd=sd49,lun=\\.PhysicalDrive48
sd=sd50,lun=\\.PhysicalDrive49
sd=sd51,lun=\\.PhysicalDrive50
sd=sd52,lun=\\.PhysicalDrive51
sd=sd53,lun=\\.PhysicalDrive52
sd=sd54,lun=\\.PhysicalDrive53
sd=sd55,lun=\\.PhysicalDrive54
sd=sd56,lun=\\.PhysicalDrive55
sd=sd57,lun=\\.PhysicalDrive56
sd=sd58,lun=\\.PhysicalDrive57
sd=sd59,lun=\\.PhysicalDrive58
sd=sd60,lun=\\.PhysicalDrive59
sd=sd61,lun=\\.PhysicalDrive60
sd=sd62,lun=\\.PhysicalDrive61
sd=sd63,lun=\\.PhysicalDrive62
sd=sd64,lun=\\.PhysicalDrive63
sd=sd65,lun=\\.PhysicalDrive64
sd=sd66,lun=\\.PhysicalDrive65
sd=sd67,lun=\\.PhysicalDrive66
sd=sd68,lun=\\.PhysicalDrive67
sd=sd69,lun=\\.PhysicalDrive68
sd=sd70,lun=\\.PhysicalDrive69
sd=sd71,lun=\\.PhysicalDrive70
sd=sd72,lun=\\.PhysicalDrive71
sd=sd73,lun=\\.PhysicalDrive72
sd=sd74,lun=\\.PhysicalDrive73
sd=sd75,lun=\\.PhysicalDrive74
sd=sd76,lun=\\.PhysicalDrive75
sd=sd77,lun=\\.PhysicalDrive76
sd=sd78,lun=\\.PhysicalDrive77
sd=sd79,lun=\\.PhysicalDrive78
sd=sd80,lun=\\.PhysicalDrive79
sd=sd81,lun=\\.PhysicalDrive80
sd=sd82,lun=\\.PhysicalDrive81
sd=sd83,lun=\\.PhysicalDrive82
sd=sd84,lun=\\.PhysicalDrive83
sd=sd85,lun=\\.PhysicalDrive84
sd=sd86,lun=\\.PhysicalDrive85
sd=sd87,lun=\\.PhysicalDrive86
sd=sd88,lun=\\.PhysicalDrive87
sd=sd89,lun=\\.PhysicalDrive88
sd=sd90,lun=\\.PhysicalDrive89
sd=sd91,lun=\\.PhysicalDrive90
sd=sd92,lun=\\.PhysicalDrive91
sd=sd93,lun=\\.PhysicalDrive92
sd=sd94,lun=\\.PhysicalDrive93
sd=sd95,lun=\\.PhysicalDrive94
sd=sd96,lun=\\.PhysicalDrive95
```

```
sd=default,host=CB36,size=1878g
sd=sd1,lun=\\.\PhysicalDrive0
sd=sd2,lun=\\.\PhysicalDrive1
sd=sd3,lun=\\.\PhysicalDrive2
sd=sd4,lun=\\.\PhysicalDrive3
sd=sd5,lun=\\.\PhysicalDrive4
sd=sd6,lun=\\.\PhysicalDrive5
sd=sd7,lun=\\.\PhysicalDrive6
sd=sd8,lun=\\.\PhysicalDrive7
sd=sd9,lun=\\.\PhysicalDrive8
sd=sd10,lun=\\.\PhysicalDrive9
sd=sd11,lun=\\.\PhysicalDrive10
sd=sd12,lun=\\.\PhysicalDrive11
sd=sd13,lun=\\.\PhysicalDrive12
sd=sd14,lun=\\.\PhysicalDrive13
sd=sd15,lun=\\.\PhysicalDrive14
sd=sd16,lun=\\.\PhysicalDrive15
sd=sd17,lun=\\.\PhysicalDrive16
sd=sd18,lun=\\.\PhysicalDrive17
sd=sd19,lun=\\.\PhysicalDrive18
sd=sd20,lun=\\.\PhysicalDrive19
sd=sd21,lun=\\.\PhysicalDrive20
sd=sd22,lun=\\.\PhysicalDrive21
sd=sd23,lun=\\.\PhysicalDrive22
sd=sd24,lun=\\.\PhysicalDrive23
sd=sd25,lun=\\.\PhysicalDrive24
sd=sd26,lun=\\.\PhysicalDrive25
sd=sd27,lun=\\.\PhysicalDrive26
sd=sd28,lun=\\.\PhysicalDrive27
sd=sd29,lun=\\.\PhysicalDrive28
sd=sd30,lun=\\.\PhysicalDrive29
sd=sd31,lun=\\.\PhysicalDrive30
sd=sd32,lun=\\.\PhysicalDrive31
sd=sd33,lun=\\.\PhysicalDrive32
sd=sd34,lun=\\.\PhysicalDrive33
sd=sd35,lun=\\.\PhysicalDrive34
sd=sd36,lun=\\.\PhysicalDrive35
sd=sd37,lun=\\.\PhysicalDrive36
sd=sd38,lun=\\.\PhysicalDrive37
sd=sd39,lun=\\.\PhysicalDrive38
sd=sd40,lun=\\.\PhysicalDrive39
sd=sd41,lun=\\.\PhysicalDrive40
sd=sd42,lun=\\.\PhysicalDrive41
sd=sd43,lun=\\.\PhysicalDrive42
sd=sd44,lun=\\.\PhysicalDrive43
sd=sd45,lun=\\.\PhysicalDrive44
sd=sd46,lun=\\.\PhysicalDrive45
sd=sd47,lun=\\.\PhysicalDrive46
sd=sd48,lun=\\.\PhysicalDrive47
sd=sd49,lun=\\.\PhysicalDrive48
sd=sd50,lun=\\.\PhysicalDrive49
sd=sd51,lun=\\.\PhysicalDrive50
sd=sd52,lun=\\.\PhysicalDrive51
sd=sd53,lun=\\.\PhysicalDrive52
sd=sd54,lun=\\.\PhysicalDrive53
sd=sd55,lun=\\.\PhysicalDrive54
sd=sd56,lun=\\.\PhysicalDrive55
sd=sd57,lun=\\.\PhysicalDrive56
sd=sd58,lun=\\.\PhysicalDrive57
sd=sd59,lun=\\.\PhysicalDrive58
sd=sd60,lun=\\.\PhysicalDrive59
sd=sd61,lun=\\.\PhysicalDrive60
sd=sd62,lun=\\.\PhysicalDrive61
```

```
sd=sd63,lun=\\.\PhysicalDrive62
sd=sd64,lun=\\.\PhysicalDrive63
sd=sd65,lun=\\.\PhysicalDrive64
sd=sd66,lun=\\.\PhysicalDrive65
sd=sd67,lun=\\.\PhysicalDrive66
sd=sd68,lun=\\.\PhysicalDrive67
sd=sd69,lun=\\.\PhysicalDrive68
sd=sd70,lun=\\.\PhysicalDrive69
sd=sd71,lun=\\.\PhysicalDrive70
sd=sd72,lun=\\.\PhysicalDrive71
sd=sd73,lun=\\.\PhysicalDrive72
sd=sd74,lun=\\.\PhysicalDrive73
sd=sd75,lun=\\.\PhysicalDrive74
sd=sd76,lun=\\.\PhysicalDrive75
sd=sd77,lun=\\.\PhysicalDrive76
sd=sd78,lun=\\.\PhysicalDrive77
sd=sd79,lun=\\.\PhysicalDrive78
sd=sd80,lun=\\.\PhysicalDrive79
sd=sd81,lun=\\.\PhysicalDrive80
sd=sd82,lun=\\.\PhysicalDrive81
sd=sd83,lun=\\.\PhysicalDrive82
sd=sd84,lun=\\.\PhysicalDrive83
sd=sd85,lun=\\.\PhysicalDrive84
sd=sd86,lun=\\.\PhysicalDrive85
sd=sd87,lun=\\.\PhysicalDrive86
sd=sd88,lun=\\.\PhysicalDrive87
sd=sd89,lun=\\.\PhysicalDrive88
sd=sd90,lun=\\.\PhysicalDrive89
sd=sd91,lun=\\.\PhysicalDrive90
sd=sd92,lun=\\.\PhysicalDrive91
sd=sd93,lun=\\.\PhysicalDrive92
sd=sd94,lun=\\.\PhysicalDrive93
sd=sd95,lun=\\.\PhysicalDrive94
sd=sd96,lun=\\.\PhysicalDrive95
```

Large File Processing Test (LFP)

[Common Commands/Parameters – LFP, LDQ and VOD](#)

[Common Commands/Parameters – LFP, LDQ, VOD and Persistence](#)

```
maxlatestart=0
reportinginterval=5
segmentlength=512m
rd=default,measurement=180,runout=45,rampdown=15,buffers=1
```

```
rd=default,rdpct=0,xfersize=1024k
rd=default,rampup=180,periods=90
rd=TR1_SPC-2-FP2.0,streams=32
rd=TR2_SPC-2-FP2.0,streams=16
rd=TR3_SPC-2-FP2.0,streams=8
rd=TR4_SPC-2-FP2.0,streams=4
rd=TR5_SPC-2-FP2.0,streams=1
```

```
rd=default,xfersize=256k
rd=default,rampup=180,periods=90
rd=TR6_SPC-2-FP2.0,streams=32
rd=TR7_SPC-2-FP2.0,streams=16
rd=TR8_SPC-2-FP2.0,streams=8
rd=TR9_SPC-2-FP2.0,streams=4
rd=TR10_SPC-2-FP2.0,streams=1
```



```
rd=default,rdpct=50,xfersize=1024k
rd=default,rampup=180,periods=90
rd=TR11_SPC-2-FP2.0,streams=200
rd=TR12_SPC-2-FP2.0,streams=100
rd=TR13_SPC-2-FP2.0,streams=50
rd=TR14_SPC-2-FP2.0,streams=25
rd=TR15_SPC-2-FP2.0,streams=1
```

```
rd=default,xfersize=256k
rd=default,rampup=180,periods=90
rd=TR16_SPC-2-FP2.0,streams=200
rd=TR17_SPC-2-FP2.0,streams=100
rd=TR18_SPC-2-FP2.0,streams=50
rd=TR19_SPC-2-FP2.0,streams=25
rd=TR20_SPC-2-FP2.0,streams=1
```

```
rd=default,rdpct=100,xfersize=1024k
rd=default,rampup=180,periods=90
rd=TR21_SPC-2-FP2.0,streams=200
rd=TR22_SPC-2-FP2.0,streams=100
rd=TR23_SPC-2-FP2.0,streams=50
rd=TR24_SPC-2-FP2.0,streams=25
rd=TR25_SPC-2-FP2.0,streams=1
```

```
rd=default,xfersize=256k
rd=default,rampup=180,periods=90
rd=TR26_SPC-2-FP2.0,streams=200
rd=TR27_SPC-2-FP2.0,streams=100
rd=TR28_SPC-2-FP2.0,streams=50
rd=TR29_SPC-2-FP2.0,streams=25
rd=TR30_SPC-2-FP2.0,streams=1
```

Large Database Query Test (LDQ)

[Common Commands/Parameters – LFP, LDQ and VOD](#)

[Common Commands/Parameters – LFP, LDQ, VOD and Persistence](#)

```
maxlatestart=0
reportinginterval=5
segmentlength=512m
rd=default,rdpct=99,rampup=180,measurement=180,runout=45,rampdown=15,periods=90
```

```
rd=default,xfersize=1024k,buffers=4
rd=TR1_SPC-2-DQ,streams=120
rd=TR2_SPC-2-DQ,streams=60
rd=TR3_SPC-2-DQ,streams=30
rd=TR4_SPC-2-DQ,streams=15
rd=TR5_SPC-2-DQ,streams=1
rd=default,xfersize=1024k,buffers=1
rd=TR6_SPC-2-DQ,streams=120
rd=TR7_SPC-2-DQ,streams=60
rd=TR8_SPC-2-DQ,streams=30
rd=TR9_SPC-2-DQ,streams=15
rd=TR10_SPC-2-DQ,streams=1
rd=default,xfersize=64k,buffers=4
rd=TR11_SPC-2-DQ,streams=200
rd=TR12_SPC-2-DQ,streams=100
rd=TR13_SPC-2-DQ,streams=50
rd=TR14_SPC-2-DQ,streams=25
rd=TR15_SPC-2-DQ,streams=1
rd=default,xfersize=64k,buffers=1
```

```
rd=TR16_SPC-2-DQ,streams=200
rd=TR17_SPC-2-DQ,streams=100
rd=TR18_SPC-2-DQ,streams=50
rd=TR19_SPC-2-DQ,streams=25
rd=TR20_SPC-2-DQ,streams=1
```

Video on Demand Delivery (VOD)

```
host=localhost,
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
spc2="c:\spc\spc2",
shell=spc2,
jvms=10,
maxstreams=400,
```

```
host=(172.17.17.39,CB39),
spc2="c:\spc\spc2",
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
shell=spc2,
jvms=10,
maxstreams=400,
```

```
host=(172.17.17.40,CB40),
spc2="c:\spc\spc2",
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
shell=spc2,
jvms=10,
maxstreams=400,
```

```
host=(172.17.17.41,CB41),
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
spc2="c:\spc\spc2",
shell=spc2,
jvms=10,
maxstreams=400,
```

```
host=(172.17.17.34,CB34),
spc2="c:\spc\spc2",
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
shell=spc2,
jvms=10,
maxstreams=400,
```

```
host=(172.17.17.36,CB36),
java=("c:\java64\bin\java.exe", "-Xmx4000m -Xms4000m -Xss128m"),
spc2="c:\spc\spc2",
shell=spc2,
jvms=10,
maxstreams=400,
```

[Common Commands/Parameters – LFP, LDQ, VOD and Persistence](#)

```
maxlatestart=0
videosegmentduration=1200
maxlatevod=0
reportinginterval=5
reportinginterval=5
rd=default,rampup=1200,measurement=7200,runout=45,rampdown=15,buffers=8
```

```
rd=TR1_SPC-2-VOD,streams=15500
```

SPC-2 Persistence Test Run 1 (*write phase*)

Common Commands/Parameters – LFP, LDQ and VOD

Common Commands/Parameters – LFP, LDQ, VOD and Persistence

```
maxlatestart=0  
reportinginterval=5  
segmentlength=512m  
rd=default,rampup=180,periods=90,measurement=300,runout=0,rampdown=0,buffers=1
```

```
rd=default,rdpct=0,xfersize=1024k  
rd=TR1_SPC-2-persist-w,streams=32
```

SPC-2 Persistence Test Run 2 (*read phase*)

Common Commands/Parameters – LFP, LDQ and VOD

Common Commands/Parameters – LFP, LDQ, VOD and Persistence

```
maxlatestart=0  
reportinginterval=5  
segmentlength=512m  
maxpersistenceerrors=10  
rd=default,rampup=0,periods=0,measurement=300,runout=0,rampdown=0,buffers=1
```

```
rd=default,rdpct=100,xfersize=1024k  
rd=TR1_SPC-2-persist-r,streams=0
```

APPENDIX E: SPC-2 WORKLOAD GENERATOR EXECUTION COMMANDS AND PARAMETERS

ASU Pre-Fill, Large File Processing Test, Large Database Query Test, Video on Demand Delivery Test, and SPC-2 Persistence Test Run 1

The following 'master' script invoked [Prefill-multihost HUSVM SPC2.bat](#) to execute the ASU pre-fill followed by invoking [HUS-VM SPC2 testing.bat](#) to execute the Large File Processing Test, Large Database Query Test, Video on Demand Delivery Test and SPC-2 Persistence SPC-2 Persistence Test Run 1.

The **psexec** utility is a lightweight telnet replacement that allows execution of processes on remote systems, complete with full interactivity for console applications, with having to manually install client software. The utility is available at <http://technet.microsoft.com/en-us/sysinternals/bb897553.aspx>.

```
call Prefill-multihost_HUSVM_SPC2.bat  
  
call HUS-VM_SPC2_testing.bat
```

Prefill-multihost_HUSVM_SPC2.bat

```
psexec -d \\172.17.17.34 C:\spc\spc2\vdbench_rsh.bat  
psexec -d \\172.17.17.36 C:\spc\spc2\vdbench_rsh.bat  
psexec -d \\172.17.17.39 C:\spc\spc2\vdbench_rsh.bat  
psexec -d \\172.17.17.40 C:\spc\spc2\vdbench_rsh.bat  
psexec -d \\172.17.17.41 C:\spc\spc2\vdbench_rsh.bat  
  
rem prefill  
call /vdbench503rc11/vdbench.bat -f /spc/spc2/prefill-multihost.txt -o  
c:\spc\spc2\prefill_multihost_10032013-1  
  
rem 10 min pause time  
timeout /t 600 /nobreak  
  
psexec -d \\172.17.17.38 C:\spc\spc2\java_taskkill.bat  
psexec -d \\172.17.17.34 C:\spc\spc2\java_taskkill.bat  
psexec -d \\172.17.17.36 C:\spc\spc2\java_taskkill.bat  
psexec -d \\172.17.17.39 C:\spc\spc2\java_taskkill.bat  
psexec -d \\172.17.17.40 C:\spc\spc2\java_taskkill.bat  
psexec -d \\172.17.17.41 C:\spc\spc2\java_taskkill.bat
```

vdbench_rsh.bat

```
C:\vdbench503rc11\vdbench_rsh
```

java_taskkill.bat

```
taskkill /f /im java.exe  
taskkill /f /im javaw.exe
```

HUS-VM_SPC2_testing.bat

```
set LIBPATH=C:\spc\spc2
set CLASSPATH=C:\spc\spc2

cd C:\spc\spc2

psexec -d \\172.17.17.34 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.36 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.39 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.40 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.41 C:\spc\spc2\RemoteStart.bat

mkdir HUS-VM_SPC2_results-10032013-1

rem init volumes
call spc2.bat -f LFP_SPC2_test.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-1\init1 -init

rem vod test
call spc2.bat -f VOD_SPC2_test_15500.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-1\spc2_vod

rem lfp test
call spc2.bat -f LFP_SPC2_test.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-1\spc2_lfp

rem ldq test
call spc2.bat -f LDQ_SPC2_test.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-1\spc2_ldq

rem perl
call spc2.bat -f Perl_SPC2_test.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-1\spc2_perl

psexec -d \\172.17.17.34 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.36 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.39 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.40 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.41 C:\spc\spc2\RemoteStart-stop.bat
```

RemoteStart.bat

```
call java -Xmx4000m -Xms4000m -Xss128m -cp /spc/spc2/ RemoteStart
```

RemoteStart-stop.bat

```
taskkill /f /im java.exe
```

SPC-2 Persistence Test Run 2

The following script was invoked to execute SPC-2 Persistence Test Run 2 after the required TSC power off/power on cycle.

```
set LIBPATH=C:\spc\spc2
set CLASSPATH=C:\spc\spc2

cd C:\spc\spc2


psexec -d \\172.17.17.34 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.36 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.39 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.40 C:\spc\spc2\RemoteStart.bat
psexec -d \\172.17.17.41 C:\spc\spc2\RemoteStart.bat

rem per2
call spc2.bat -f Per2_SPC2_test.txt -o c:\spc\spc2\HUS-VM_SPC2_results-10032013-
1\spc2_per2

psexec -d \\172.17.17.34 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.36 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.39 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.40 C:\spc\spc2\RemoteStart-stop.bat
psexec -d \\172.17.17.41 C:\spc\spc2\RemoteStart-stop.bat
```

APPENDIX F: THIRD PARTY QUOTATIONS

Emulex LightPulse LPe12002 FC HBAs and Cables



Celebrating 23 Years!

Quotation

Quote #	Date
60547	09/12/2013
Sales Rep	
Paul Albright 210-691-1715	

For	Customer #HS1167	Phones								
Kien Tran HITACHI Data Systems 2845 Lafayette Street Accounts Payable Santa Clara CA 95050-2627		Wk 408-327- mwk 408-327-4282 Cel 561-889-6000								
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 15%;">PO #</th> <th style="width: 15%;">Terms</th> <th style="width: 15%;">Ship Date</th> <th style="width: 15%;">Ship Via</th> </tr> <tr> <td></td> <td>NET 30</td> <td></td> <td></td> </tr> </table>	PO #	Terms	Ship Date	Ship Via		NET 30		
PO #	Terms	Ship Date	Ship Via							
	NET 30									

	Part	Description	Qty	Price	Extended
1)	LPE12002-M8	Emulex LightPulse LPe12002 Fibre Channel Host Bus Adapter LPE12002-M8 2CH 8GB PCIE 3.3/5V FC HBA LOW PROFILE W/STD BRACKET 2 x LC - PCI Express 2.0 - 8Gbps	12	1,380.00	16,560.00
2)	2-LCLC-Z50RT-003M	2-LCLC-Z50RT-003M LC-LC, 50/125 OM2 3MM ZIP RISER	24	21.50	516.00

Thank you,
Paul Albright

Quotes are valid for 30 days.
4730 Shavano Oak Suite 215
San Antonio, Texas 78249

	Subtotal	17,076.00
	TOTAL	\$17,076.00

Page 1